

SLIM STACK 2036B

PROJECTPROJET

SPEC TYPE


NOTES



BAFFLE OPTIONS



BLK-BLKBLK-WHCHR-BLKCHR-WHWH-BLKWH-WH

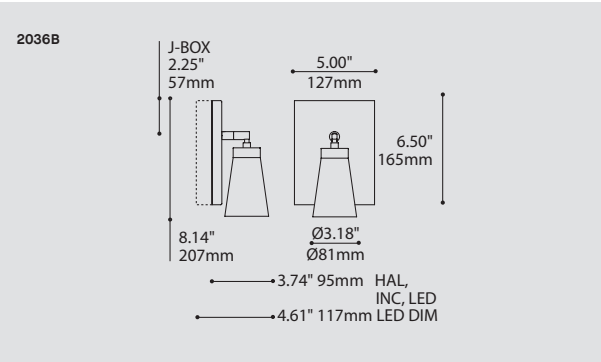

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODELMODÈLE		2036B
2036B	SLIM STACK	
LIGHT SOURCESOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
MR16C.50		50W, HAL, MR16C, GU5.3 BASE
GZ10.50		50W, HAL, MR16, GZ10 BASE (120V ONLY)
PAR20.50		50W, INC, PAR20, MEDIUM BASE (120V ONLY)
LED.4		4W, LED
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
FOR LED ONLY		
27		2700K
30		3000K
35		3500K
40*		4000K
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		
90		90+ CRI
FOR LED ONLY - MANDATORY		
VOLTAGEVOLTAGE		
120V		120 VOLT
277V		277 VOLT
DIMMING OPTIONOPTION DE GRADATION		
FOR LED ONLY		
DV		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
MOUNTINGMONTAGE		REC
REC		RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE
		FOR INC, HAL & LED: 0.60" CANOPY (2441C)
		FOR LED DIMMABLE: 1.50" CANOPY (2441G)
STRUCTURE FINISHFINI STRUCTURE		CHR
CHR		CHROME
DIFFUSER FINISHFINI DIFFUSEUR		
BLK		BLACK
CHR		CHROME
WH		WHITE
BAFFLE FINISHFINI DÉFLECTEUR		
BLK		BLACK
WH		WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM

DIM

IES

LED

90°

350°

DESIGN:	Contrasting and versatile, the wall mounted Stack (Slim or Stubby version) is perfectly framed by a rectangular chrome canopy.
LIGHT SOURCE:	Available with 4W dimming or non-dimming LED, as well as other light sources.
STRUCTURE:	Double layered die-formed steel shade with chrome plated or white or black powder coat finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	Contrastant et polyvalent, le Stack (version Slim ou Stubby) est parfaitement encadré par un pavillon chrome.
SOURCE LUMINEUSE:	DEL 4W offerte, avec ou sans option de gradation; autres sources lumineuses offertes.
STRUCTURE:	Abat-jour double épaisseur en acier embouti avec fini chromé ou peinture blanche ou noir électrostatique à base de polyester.
CERTIFIÉ:	c-CSA-us

FAMILYFAMILLE



2036/40362038/4038 SUSPENDED44364424-SLS/STS

2036B/2038B

4036/4038

2036/2038

CHROME CANOPY
1/4" thk Standard
1" thk Dimming

SHADE
Double layered die-formed
steel with chrome plated
or polyester powder finish

LED MODULE WITH DIE-CAST
ALUMINUM HEATSINK
Black anodized for improved
thermal management

ORIENTATION
Adjustable fitting

DIMMING OPTION
Lightech "Trailing Edge"
electronic dimming driver

17° TOTAL BEAM ANGLE
PMMA TIR (total internal
reflecting) Ledil optic


CONTRASTING AND VERSATILE
Pendant and projector have a
perfectly formed design

STEM


INCANDESCENT

HALOGEN MR16


ORIENTATION
Adjustable fitting
on stem

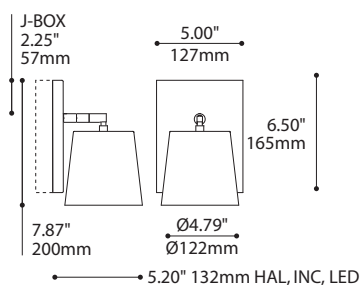


2038B → 5.20" 132mm HAL, INC, LED

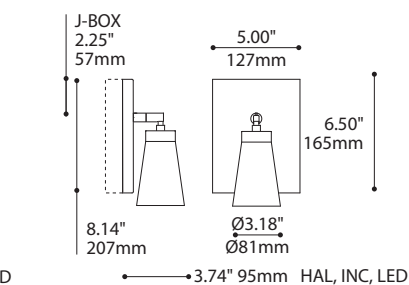


2036B → 4.61" 117mm LED DIM




4036



4038



2036



2038

SPECIFICATIONS

LIGHT SOURCE

MODULE

LUMENS (ESTIMATED)

CRI

ROHS

HOUSING

HEATSINK

LIGHT DISTRIBUTION

OPTICS

VOLTAGE

DRIVER

DIMMING

LM-79

WARRANTY

CERTIFICATION

LED

4 x Nichia - total ±4 w

UL recognized - made in USA

376 lm - 468 lm (4000K)

85 CRI (typical)

Compliant

Die-formed steel

Black anodized aluminium

Directional projector (203X(B))/Direct (403X)

LEDIL TIR - 17° total beam angle

120V or 277V

350 mA

Phase dimming (DP) or 0-10V dimming (DV)

On request

5 years (on electronic components)

CSA recognized

HALOGEN

MR16C, GU5.3 Base/MR16, GZ10 Base- 50W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V (MR16), 120V or 277V (MR16C)

Electronic low voltage transformer

Dimmable

3-5 years (on transformer, depending

of the transformer)

INCANDESCENT

INC, PAR20, Medium Base- 50W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V

N/A

Dimmable



EUREKA


225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2036B 4036 2036
2038B 4038 2038

2036B/2038B

PAVILLON CHROMÉ
1/4" d'épaisseur
(standard)
1" d'épaisseur
(à gradation)

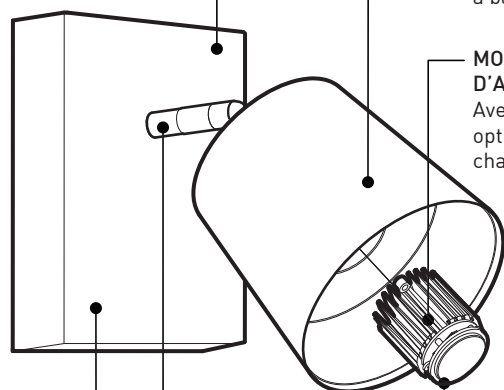

ORIENTATION
Ajustable

DIMMING OPTION
Pilote électronique à
gradation Lightech
"Trailing Edge"

ABAT-JOUR

En deux épaisseurs d'acier
embouti avec fini chromé
ou peinture électrostatique
à base de polyester


MODULE DEL AVEC RADIATEUR
D'ALUMINIUM INJECTÉ

Avec fini anodisé noir pour
optimiser la diffusion de la
chaleur

ANGLE TOTAL DE FAISCEAU
LUMINEUX DE 17°

PMMA RTI (réflexion
totale interne) optique Ledil

4036/4038

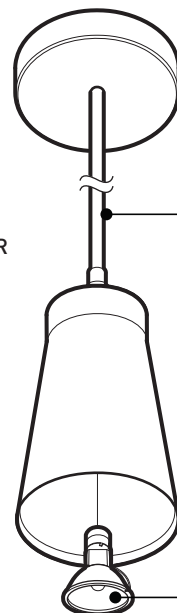


CONTRASTANT ET POLYVALENT
Pendant and projector have a
perfectly formed design

TIGE


INCANDESCENT

HALOGÈNE MR16

2036/2038

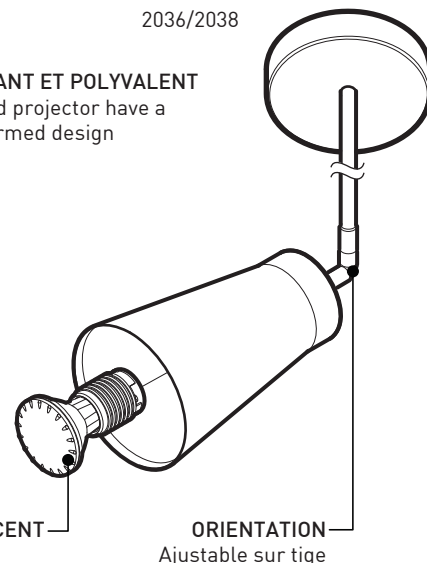


ORIENTATION
Ajustable sur tige

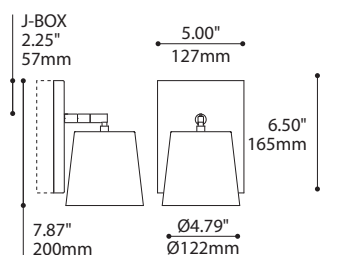


2038B


2036B




4.61" 117mm LED DIM



4036



4038



2036



2038

SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS (ESTIMÉ)

IRC

ROHS

RADIATEUR

DISTRIBUTION LUMINEUSE

OPTIQUE

VOLTAGE

PILOTE

GRADATION

LM-79

GARANTIE

CERTIFICATION

DEL

4 x Nichia - total ±4 w

Reconnu par UL - Fabriqué aux États-Unis

376 lm - 468 lm (4000K)

85 IRC (typique)

Conforme

Aluminium anodisé noir

Direct

LEDIL TIR- angle total de faisceau de 17°

120V ou 277V

350 mA

Gradation phase (DP) ou Gradation 0-10V (DV)

Sur demande

5 ans (sur les composants électroniques)

Reconnu par CSA

HALOGÈNE

MR16C, GU5.3 Base/MR16, GZ10 Base- 50W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V (MR16), 120V ou 277V (MR16C)

Transformateur électronique à bas voltage

Intensité variable

3-5 ans (sur le transformateur, selon le

transformateur)

INCANDESCENT

INC, PAR20, Base moyenne- 50W

N/A

N/A

N/A

N/A

N/A

N/A

N/A

120V

N/A

Intensité variable



EUREKA

225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



2036B 4036 2036
2038B 4038 2038