

GIMBAL 2187

PROJECT PROJET
SPEC TYPE
NOTES




OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	INTRACK 1 CIRCUIT	INTRACK 2 CIRCUIT	INC
MOUNTING	2734B	2764B	2401E
STEM	45.00"	45.95"	44.00"

* FOR 2188, ADD 0.95"



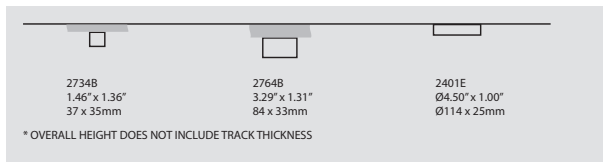

MOUNTING OPTIONS OPTIONS DE MONTAGE

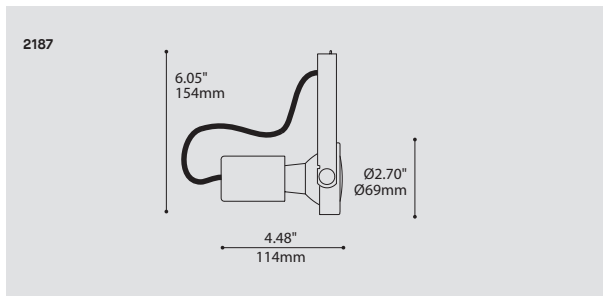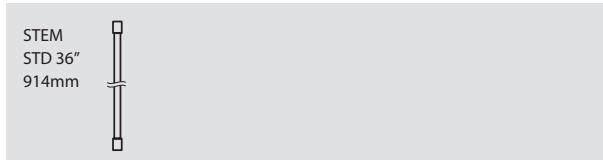

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE	CODE
2187 GIMBAL 20	2187
LIGHT SOURCE SOURCE LUMINEUSE	
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)	
PAR20.50  50W, INC, PAR20, MEDIUM BASE (120V ONLY)	
VOLTAGE VOLTAGE	
120V 120 VOLT	120V
STEM TIGE	
S6 1/4" (6MM) STEM, FIELD ADJUSTABLE	
- NO STEM	
STEM LENGTH LONGUEUR DE TIGE	
36 36" STEM (STD LENGTH)	
** CUSTOM STEM LENGTH (MIN 2") (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE	
RC  ROUND CANOPY / PAVILLON ROND 1" CANOPY (2401E)	
TA1  TRACK ADAPTOR / ADAPTATEUR DE RAIL 1 CIRCUIT INC 120V ADAPTOR (2734B)	
TA2  TRACK ADAPTOR / ADAPTATEUR DE RAIL 2 CIRCUITS INC 120V ADAPTOR (2764B)	
MOUNTING OPTION OPTION DE MONTAGE	
SCA SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°)	
TRACK ADAPTOR FINISH FINI ADAPTATEUR DE RAIL^(A)	
WH WHITE	
BLK BLACK	
MG METALLIC GRAY (1 CIRCUIT ONLY)	
^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE^(B)	
WH WHITE	
BLK BLACK	
MG METALLIC GRAY	
^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Honest and stripped-down look that reduces the spotlight to its simplest elements.

LIGHT SOURCE: PAR20, PAR30 available with one or two circuit track adaptor.

STRUCTURE: Die-formed steel with machined steel construction. Available in three polyester powder finishes.

CERTIFIED: c-CSA-us, c-UL-us

CONCEPTION: Projecteur à sa plus simple expression par ses formes épurées et authentiques.

SOURCE LUMINEUSE: PAR20, PAR30 disponibles avec un système de rails à un ou deux circuits.

STRUCTURE: Acier embouti et usiné. Disponible en trois teintes de peinture électrostatique à base de polyester.

CERTIFIÉ: c-CSA-us, c-UL-us