

DROPLET CELESTE 2447-CEL
REMOTE JUNCTION BOX SYSTEM

PROJECT PROJÉT

SPEC TYPE

NOTES

CANOPY DETAIL DÉTAIL PAVILLON



HEAD & GLASS FINISH FINI TÊTE & VERRE



BLKE CLR



BLKE FRO




WHE CLR



WHE FRO

REMOTE JUNCTION BOX
BOÎTE DE JONCTION ÉLOIGNÉE



ORDERING SPECIFICATION				SPÉCIFICATION DE COMMANDE		CODE
MODEL				MODÈLE		2447-CEL
2447-CEL		DROPLET CELESTE				
CONFIGURATION		CONFIGURATION				
101U	SINGLE UNIT	1 CABLE, 1 HEAD	MIN. HEIGHT 16"			
303V	V-SHAPED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 22"			
303I	INCLINED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 28"			
304D	DIAMOND CLUSTER	3 CABLES, 4 HEADS	MIN. HEIGHT 40"			
505V	V-SHAPED CLUSTER	5 CABLES, 5 HEADS	MIN. HEIGHT 28"			
505T	TRAPEZE CLUSTER	5 CABLES, 5 HEADS	MIN. HEIGHT 28"			
510D	DIAMOND CLUSTER	5 CABLES, 10 HEADS	MIN. HEIGHT 52"			
510M	MIXED CLUSTER	5 CABLES, 10 HEADS	MIN. HEIGHT 70"			
303L	LEVELED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 16"			
303S	SPIRALED CLUSTER	3 CABLES, 3 HEADS	MIN. HEIGHT 28"			
306S	SPIRALED CLUSTER	3 CABLES, 6 HEADS	MIN. HEIGHT 46"			
309S	SPIRALED CLUSTER	3 CABLES, 9 HEADS	MIN. HEIGHT 64"			
606S	SPIRALED CLUSTER	6 CABLES, 6 HEADS	MIN. HEIGHT 46"			
612S	SPIRALED CLUSTER	6 CABLES, 12 HEADS	MIN. HEIGHT 82"			
612M	MIXED CLUSTER	6 CABLES, 12 HEADS	MIN. HEIGHT 82"			
618M	MIXED CLUSTER	6 CABLES, 18 HEADS	MIN. HEIGHT 118"			
LIGHT SOURCE		SOURCE LUMINEUSE			LED	
LED		REGULAR OUTPUT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR				
27	2700K					
30	3000K					
35	3500K					
40	4000K					
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)			90	
90	90+ CRI					
VOLTAGE		VOLTAGE				
120V	120 VOLT					
277V	277 VOLT					
DIMMING OPTION		OPTION DE GRADATION				DV
DV	0-10V DIMMING (120V-277V)					
CABLE		CÂBLE				C
C	BLACK OR WHITE CABLE, CONNECTOR MOUNTED, NOT FIELD ADJUSTABLE					
OVERALL HEIGHT		HAUTEUR HORS TOUT				
**	CUSTOM OVERALL HEIGHT (PLEASE SPECIFY)					
OVERALL HEIGHT MEASURED FROM CEILING TO BOTTOM OF FIXTURE						
CONFIGURATION PATTERN IS SET, ONLY UPPER CABLES ARE INFLUENCED BY OVERALL HEIGHT						
PLEASE REFER TO CONFIGURATION'S MINIMUM HEIGHT FOR SPECIFICATION						
CANOPY FINISH		FINI PAVILLON				
BLKE	BLACK FINE TEXTURE					
WHE	WHITE FINE TEXTURE					
HEAD FINISH		FINI TÊTE				
BLKE	BLACK FINE TEXTURE					
WHE	WHITE FINE TEXTURE					
GLASS FINISH		FINI VERRE				
CLR	CLEAR GLASS					
FRO	FROSTED GLASS					

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




2.75"
(70mm)


DROPLET CELESTE 2447-CEL REMOTE JUNCTION BOX SYSTEM

CONFIGURATION CONFIGURATION


101U
Overall Height Min.
16" / 405mm




303V
Overall Height Min.
22" / 560mm




303I
Overall Height Min.
28" / 710mm




304D
Overall Height Min.
40" / 1015mm




505V
Overall Height Min.
28" / 710mm




505T
Overall Height Min.
28" / 710mm




510D
Overall Height Min.
52" / 1320mm




510M
Overall Height Min.
70" / 1780mm




303L
Overall Height Min.
16" / 405mm




303S
Overall Height Min.
28" / 710mm




306S
Overall Height Min.
46" / 1170mm




309S
Overall Height Min.
64" / 1625mm




606S
Overall Height Min.
46" / 1170mm




612S
Overall Height Min.
82" / 2080mm



612M
Overall Height Min.
82" / 2080mm



618M
Overall Height Min.
118" / 3000mm

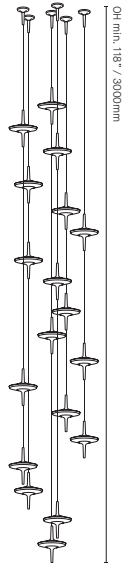

CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.

CONFIGURATION PERSONNALISÉE

Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.


INSTALL IT THE WAY YOU WANT

Every available Celeste Droplet configurations can have it's canopies installed in the ceiling pattern of your choice. It is also possible to order extra individual heads (4010-CEL) to add this extra je ne sais quoi to any existing model.


INSTALLEZ LE COMME VOUS LE VOULEZ

Every available Celeste Droplet configurations can have it's canopies installed in the ceiling pattern of your choice. It is also possible to order extra individual heads (4010-CEL) to add this extra je ne sais quoi to any existing model.


606S
Installation exemple
Circle / Cercle




606S
Installation exemple
Line / Ligne




606S
Installation random with extra heads /
Installation aléatoire avec têtes supplémentaire

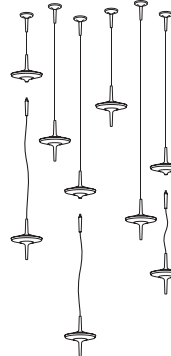

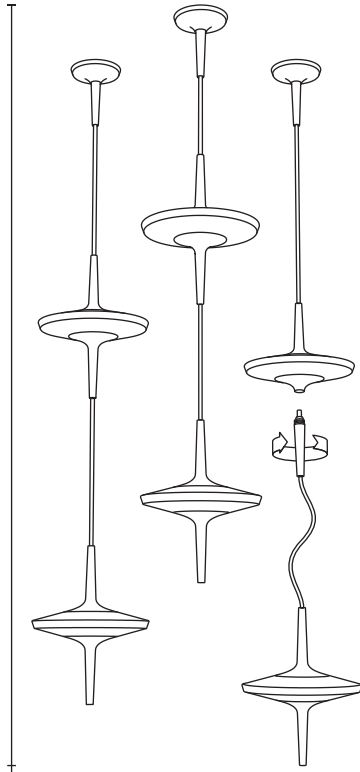

EASY TO CONFIGURE
Choose amongst the large variety of predefined clusters offers or configure your own

Specify the overall height, from the ceiling to the bottom of the fixture, in accordance with the configuration's minimum height and we'll take care of the rest

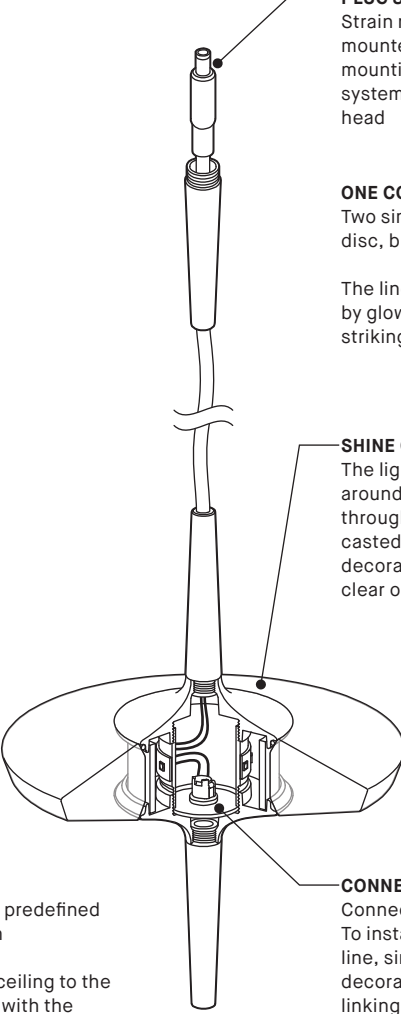

PLUG & PLAY
Strain relief, with an integrated cable mounted connector. Allows for quick mounting to one of the multiple canopy systems offered or another Celeste head


ONE CONTINUOUS LINE
Two simple elements, a line and a disc, blended into a seamless design

The linear continuity is accentuated by glowing discs of glass for a striking visual effect

SHINE ON
The light from the LED strip wrapped around the product's core is blended through a PMMA diffuser and a artisan casted glass disc for a beautiful, decorative shine. Glass disc offered in clear or frosted finish

CONNECT THE LINES
Connector hidden within the core. To install additional fixtures along the line, simply remove the lower decorative stem and replace it by linking another head


CELESTE SYSTEMS




DROPLET CELESTE 2447-CEL
Remote junction box option
Offered with 1, 3, 5, or 6 connector mounted mini canopies



DROPLET CELESTE 2448-CEL
Octagonal junction box mounting
Offered with 1 connector mounted mini canopy and decorative plate covering the junction box



ARRAY CELESTE 4425-CEL
Offered with 3 or 5 connectors



DROP CELESTE 4427-CEL
Offered with 3 or 6 connectors




CELESTE 4010-CEL
Extra head accessory light source
Requires a Celeste system (sold separately)

PRODUCT SPECIFICATION	XXX-CEL-CLR	XXX-CEL-FRO
PERFORMANCE		
WATTAGE PER HEAD	3.8W	3.8W
DELIVERED LUMENS PER HEAD (4000K)	200 LM	235LM
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM HEADS PER CABLE	6 HEADS	6 HEADS
MAXIMUM HEADS ON SYSTEM	20 HEADS	20 HEADS


EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION



4010-CEL-CLR




4010-CEL-FRO



Visit our website for warranty terms and conditions.



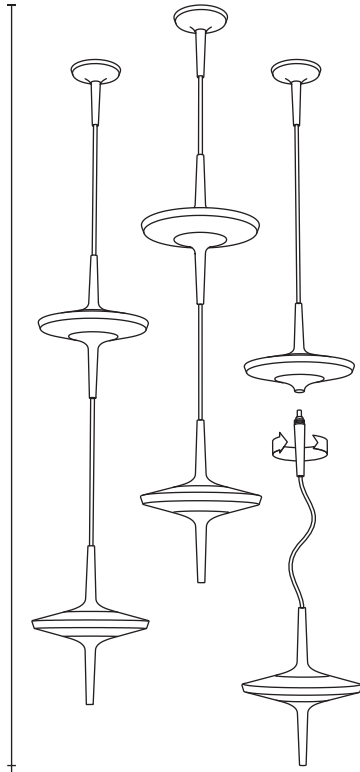

FACILE À CONFIGURER
Choisissez parmi une grand variété d'arrangements pré-configurés ou concevez le vôtre

Spécifiez la hauteur totale du plafond jusqu'au bas du luminaire, en accord avec la hauteur minimum de la configuration et on se charge du reste

PLUG & PLAY
Connecteur intégré au serre câble. Permet le montage rapide à l'un de multiple système de pavillon compatibles avec Celeste


UNE LIGNE CONTINUE
Deux éléments simples, une ligne et un disque, combinés en un design harmonieux

La continuité linéaire est accentuée par les disques lumineux pour un effet visuel impressionnant

BRILLEZ DE MILLE FEUX
La lumière de la bande DEL entourée au coeur du luminaire est transmise au travers un diffuseur de PMMA et un disque de verre coulé artisanalement pour un resplendissant éclat décoratif

CONNECTEZ LES LIGNES
Connecteur femelle dissimulé dans le luminaire. Pour connecter un luminaire, simplement retirer la tige décorative inférieure et la remplacer par le connecteur d'une seconde tête

SYSTÈMES CELESTE




DROPLET CELESTE 2447-CEL
Option avec boîtes de jonction éloignée
Offert avec 1, 3, 5, ou 6 mini pavillons munis de connecteurs



DROPLET CELESTE 2448-CEL
Montage sur boîte de jonction octogonale
Offert avec 1 mini pavillon muni d'un connecteur et une plaque décorative couvrant la boîte de jonction



ARRAY CELESTE 4425-CEL
Offert avec 3 ou 5 connecteurs



DROP CELESTE 4427-CEL
Offert avec 3 ou 6 connecteurs




CELESTE 4010-CEL
Accessoire tête lumineuse supplémentaire
Requiert un système Celeste (vendu séparément)

SPÉCIFICATION PRODUIT	XXX-CEL-CLR	XXX-CEL-FRO
PERFORMANCE		
PUISSANCE PAR TÊTE	3.8W	3.8W
LUMENS RÉELS PAR TÊTE (4000K)	200 LM	235LM
AUTRES INFORMATION		
POIDS PAR TÊTE	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM DE TÊTES PAR CABLE	6 TÊTES	6 TÊTES
MAXIMUM DE TÊTES SUR LE SYSTÈME	20 TÊTES	20 TÊTES


FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION



4010-CEL-CLR



4010-CEL-FRO