

DROPLET CELESTE 2448-CEL DEEP JUNCTION BOX MOUNTING

PROJECT PROJÉT
SPEC TYPE
NOTES

CANOPY FINISH FINI PAVILLON



BLKE


GLASS FINISH FINI VERRE




CLR

FRO

DEEP JUNCTION BOX BOÎTE DE JONCTION PROFONDE




3983



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		2448-CEL
2448-CEL	DROPLET CELESTE – JUNCTION BOX MOUNTING	
CONFIGURATION CONFIGURATION		101U
101U	SINGLE UNIT 1 CABLE, 1 HEAD MIN. HEIGHT 16"	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		DV
DV	0-10V DIMMING (120V-277V)	
CABLE CÂBLE		C
C	BLACK CABLE, CONNECTOR MOUNTED, NOT FIELD ADJUSTABLE	
OVERALL HEIGHT HAUTEUR HORS TOUT		
**	CUSTOM OVERALL HEIGHT (PLEASE SPECIFY) OVERALL HEIGHT MEASURED FROM CEILING TO BOTTOM OF FIXTURE PLEASE REFER TO CONFIGURATION'S MINIMUM HEIGHT FOR SPECIFICATION	
CANOPY FINISH FINI PAVILLON^(A)		BLKE
BLKE	BLACK FINE TEXTURE ^(A) DECORATIVE PLATE FINISH IS ALWAYS WHITE	
HEAD FINISH FINI TÊTE		BLKE
BLKE	BLACK FINE TEXTURE	
GLASS FINISH FINI VERRE		
CLR	CLEAR GLASS	
FRO	FROSTED GLASS	
ACCESSORY ACCESSOIRE		3983
3983	DEEP JUNCTION BOX (PROVIDED)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



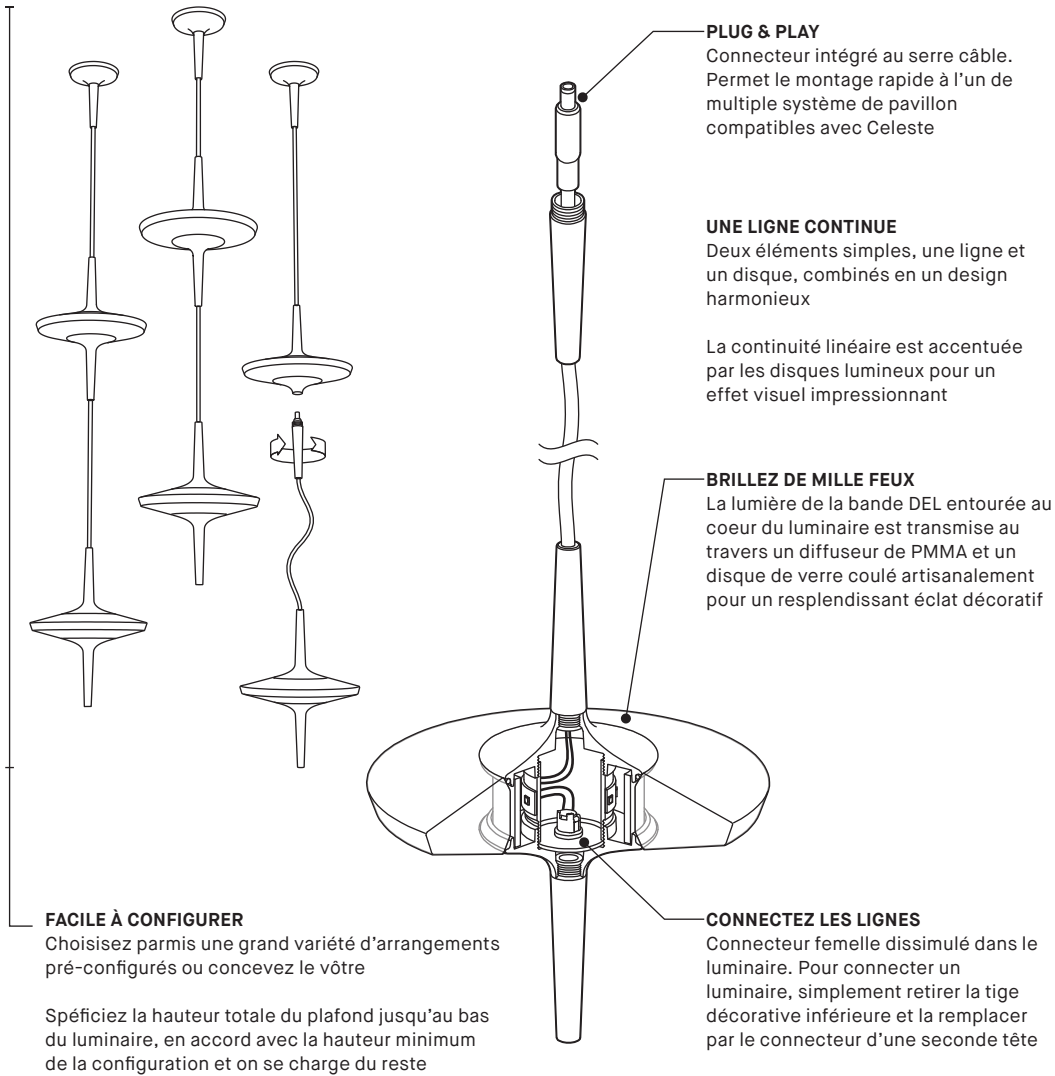


SYSTÈMES CELESTE




DROPLET CELESTE 2447-CEL
Option avec boîtes de jonction éloignée
Offert avec 1, 3, 5, ou 6 mini pavillons munis de connecteurs



DROPLET CELESTE 2448-CEL
Montage sur boîte de jonction octogonale
Offert avec 1 mini pavillon muni d'un connecteur et une plaque décorative couvrant la boîte de jonction



ARRAY CELESTE 4425-CEL
Offert avec 3 ou 5 connecteurs



DROP CELESTE 4427-CEL
Offert avec 3 ou 6 connecteurs



CELESTE 4010-CEL
Accessoire tête lumineuse supplémentaire
Requiert un système Celeste (vendu séparément)

SPÉCIFICATION PRODUIT

XXX-CEL-CLR


XXX-CEL-FRO

PERFORMANCE		
PUISSANCE PAR TÊTE	3.5W	3.5W
LUMENS RÉELS PAR TÊTE (4000K)	200 LM	235LM
AUTRES INFORMATION		
POIDS PAR TÊTE	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM DE TÊTES PAR CÂBLE	6 TÊTES	6 TÊTES
MAXIMUM DE TÊTES SUR LE SYSTÈME	20 TÊTES	20 TÊTES


FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION




4010-CEL-CLR



4010-CEL-FRO



Visitez notre site Web pour les termes et conditions.

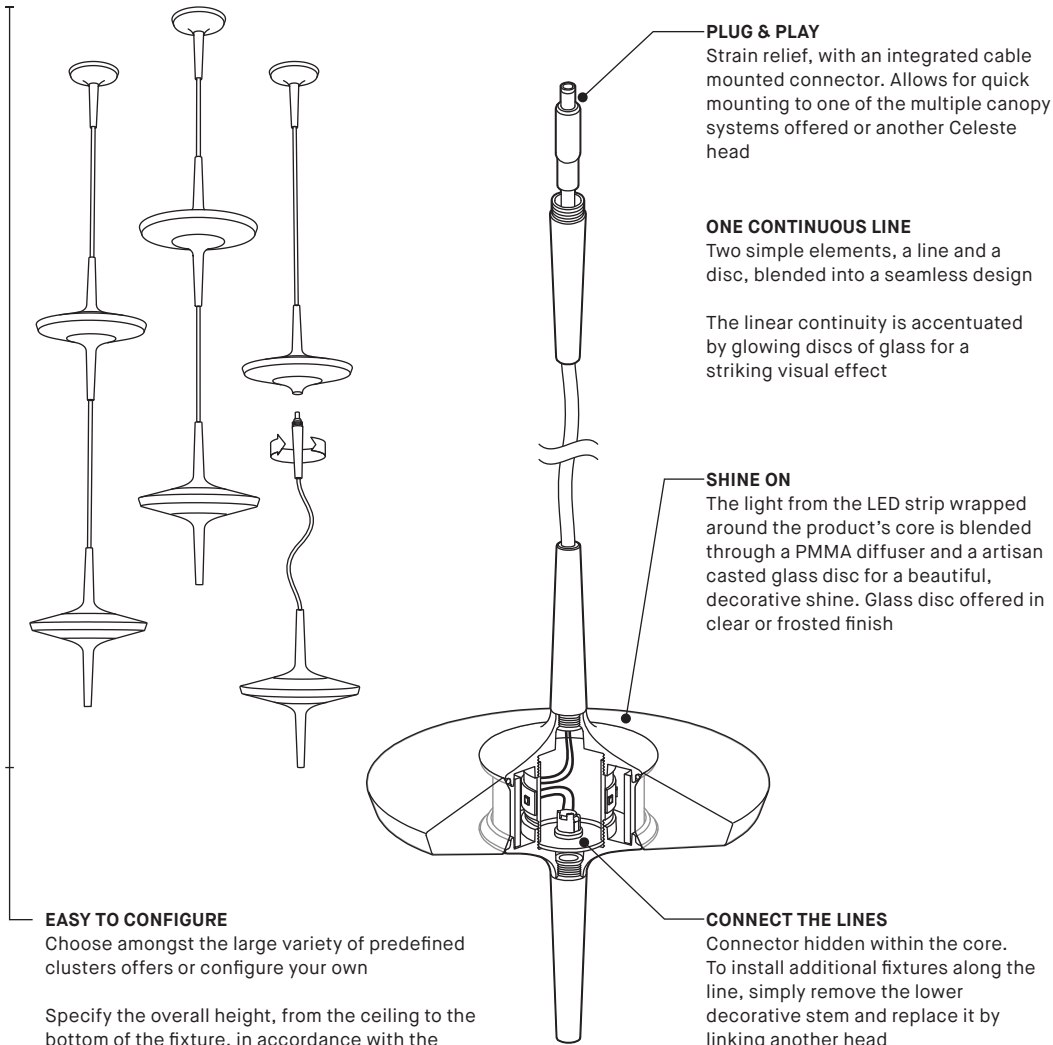

EASY TO CONFIGURE

Choose amongst the large variety of predefined clusters offers or configure your own

Specify the overall height, from the ceiling to the bottom of the fixture, in accordance with the configuration's minimum height and we'll take care of the rest

PLUG & PLAY

Strain relief, with an integrated cable mounted connector. Allows for quick mounting to one of the multiple canopy systems offered or another Celeste head

ONE CONTINUOUS LINE

Two simple elements, a line and a disc, blended into a seamless design

The linear continuity is accentuated by glowing discs of glass for a striking visual effect


SHINE ON

The light from the LED strip wrapped around the product's core is blended through a PMMA diffuser and a artisan casted glass disc for a beautiful, decorative shine. Glass disc offered in clear or frosted finish

CONNECT THE LINES

Connector hidden within the core. To install additional fixtures along the line, simply remove the lower decorative stem and replace it by linking another head

CELESTE SYSTEMS




DROPLET CELESTE 2447-CEL

Remote junction box option
Offered with 1, 3, 5, or 6 connector mounted mini canopies




DROPLET CELESTE 2448-CEL

Octagonal junction box mounting
Offered with 1 connector mounted mini canopy and decorative plate covering the junction box



ARRAY CELESTE 4425-CEL

Offered with 3 or 5 connectors



DROP CELESTE 4427-CEL

Offered with 3 or 6 connectors



CELESTE 4010-CEL

Extra head accessory light source
Requires a Celeste system (sold separately)


PRODUCT SPECIFICATION **XXX-CEL-CLR** **XXX-CEL-FRO**

PERFORMANCE		
WATTAGE PER HEAD	3.5W	3.5W
DELIVERED LUMENS PER HEAD (4000K)	200 LM	235LM
OTHER INFORMATION		
LUMINAIRE'S WEIGHT	2.2LBS / 1KG	2.2LBS / 1KG
MAXIMUM HEADS PER CABLE	6 HEADS	6 HEADS
MAXIMUM HEADS ON SYSTEM	20 HEADS	20 HEADS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80	4000K	N/A
80	3500K	N/A
80	3000K	N/A
80	2700K	N/A
90	4000K	1.00
90	3500K	0.95
90	3000K	0.90
90	2700K	0.87

LIGHT DISTRIBUTION

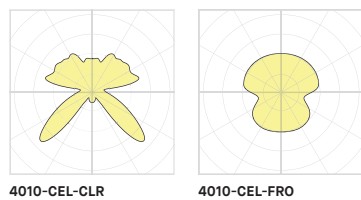

4010-CEL-CLR

4010-CEL-FRO



Visit our website for warranty terms and conditions.