


BOX 3414 / 3414B

PROJECT PROJET
SPEC TYPE
NOTES

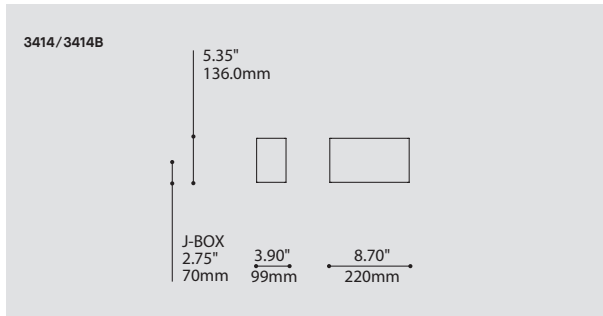

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

3414	BOX (INDIRECT)
3414B	BOX (DIRECT/INDIRECT)

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

3414		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
CF.D.18		18W, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
CF.D.26		26W, CFL, DOUBLE TWIN TUBE, G24Q3 BASE
LED.6		6W, LED

3414B		18W X 2, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
2XCF.D.18		18W X 2, CFL, DOUBLE TWIN TUBE, G24Q2 BASE
2XLED.6		6W X 2, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY	
30	3000K
35	3500K
40	4000K

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT
347V*	347 VOLT
*ONLY AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18 (NON-DIMMING BALLAST)	

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18

DM1	ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST
DM7	ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)

AVAILABLE WITH LED ONLY

DV	0-10V DIMMING (120-277V)
DP	PHASE DIMMING (120V ONLY)

EMERGENCY BATTERY BATTERIE D'URGENCE

AVAILABLE WITH CF.D.18, CF.D.26 & 2XCF.D.18, 120V OR 277V ONLY
NOT AVAILABLE WITH A DIMMING BALLAST

REM⁽¹⁾	REMOTE EMERGENCY BATTERY
⁽¹⁾ 3981 ACCESSORY IS REQUIRED FOR THIS OPTION	

STRUCTURE FINISH FINI STRUCTURE

SC	SATIN CHROME
-----------	--------------

DIFFUSER FINISH FINI DIFFUSEUR

FRO	FROSTED
------------	---------


ACCESSORY ACCESSOIRE

3981	JUNCTION BOX FOR CFL REMOTE EMERGENCY BATTERY
-------------	---

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT





DESIGN:	Minimal box design, this ADA compliant wall sconce provide a punch and is perfectly proportioned.
LIGHT SOURCE:	Indirect only (3414) either 6W LED in 3000K (Warm white), 3500K (Natural white) or 4000K (Neutral white) or 18W CFL or 26W CFL; direct/indirect (3414B) either 2 x 6W LED in 3000K (Warm white), 3500K (Naturel white) or 4000K (Neutral white) or 2 x 18W CFL.
STRUCTURE:	Die-formed satin chromed housing with white polyester powder painted inner structure.
DIFFUSER:	Translucent frosted acrylic.
CERTIFIED:	c-CSA-us
CONCEPTION:	Conforme à la norme ADA. Boîte minimaliste parfaitement proportionnée qui a de l'impact.
SOURCE LUMINEUSE:	Indirect seulement (3414) pour DEL 6W en 3000K (blanc chaud), 3500K (blanc naturel) ou 4000K (blanc neutre) ou CFL 18W ou CFL 26W; direct/indirect (3414B) DEL 2 x 6W en 3000K (blanc chaud), 3500K (blanc naturel) ou 4000K (blanc neutre) ou CFL 2 x 18W.
STRUCTURE:	Boîtier d'acier découpé et plié avec placage chrome satiné. Structure intérieure peinte avec peinture électrostatique à base de polyester blanche.
DIFFUSEUR:	Acrylique translucide givré.
CERTIFIÉ:	c-CSA-us



3414
INDIRECT

3414B
DIRECT-INDIRECT

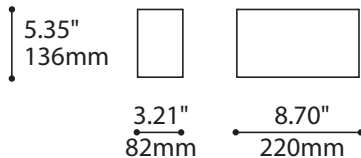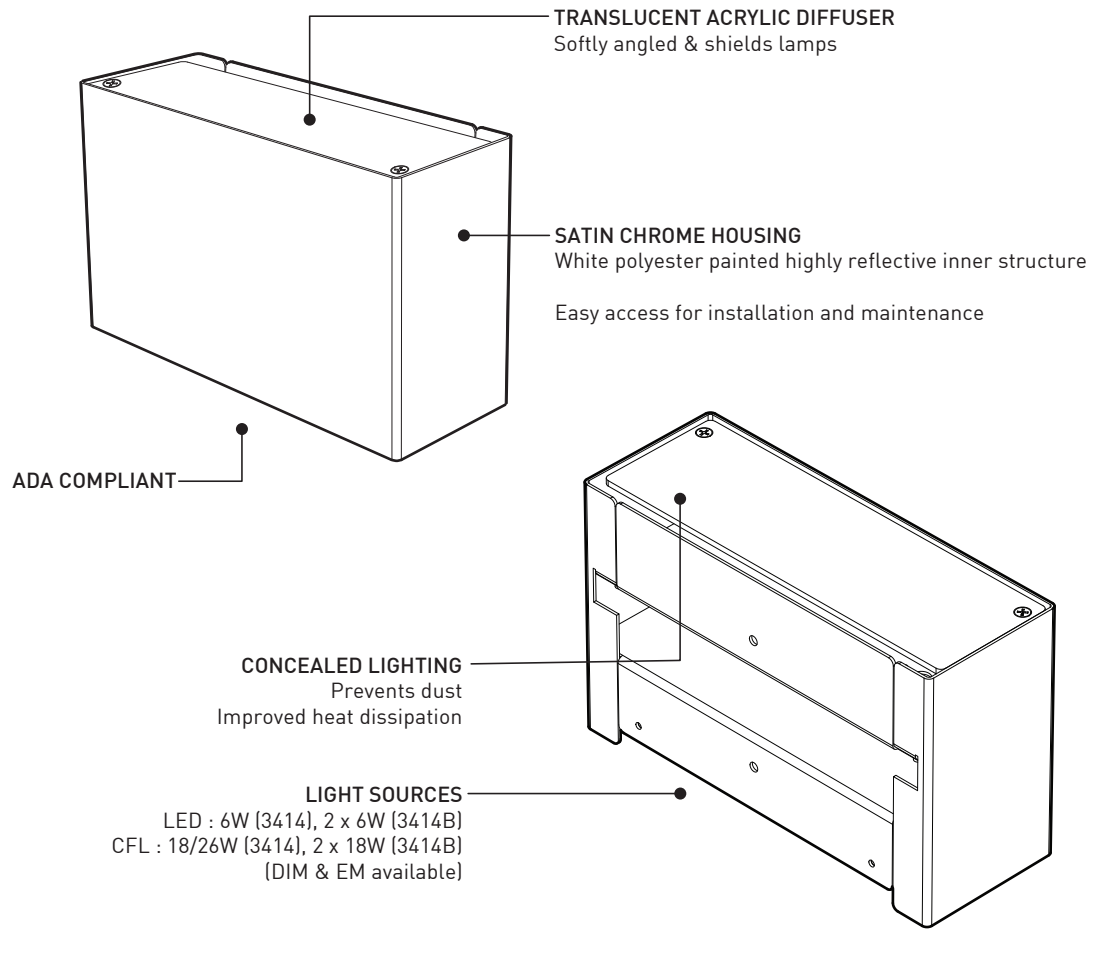

SPECIFICATIONS


	LED	FLUORESCENT
LIGHT SOURCE	1 x 6W (3414) / 2 x 6W (3414B) Luxeon Rebel	1 x 18 or 26W CFL (3414) / 2 x 18w CFL (3414B)
MODULE	UL recognized - made in USA	
LUMENS (ESTIMATED)	1 x 6W (3414): 510 lm / 2 x 6W (3414B): 1020 lm	1250 lm/lamp (18W) & 1800 lm/lamp (26W)
CRI	85 CRI (typical)	
ROHS	Compliant	
HOUSING	Die-formed satin chromed steel	Die-formed satin chromed steel
HEATSINK	Aluminium	
LIGHT DISTRIBUTION	Indirect / Direct-Indirect	Indirect / Direct-Indirect
DIFFUSER	Translucent acrylic	Translucent acrylic
VOLTAGE	120 or 277V	120-277/347V, 120-277V (Dimming)
DRIVER / BALLAST	Hatch 700 mA	Universal
DIMMING	Phase dimming (DP) or 0-10V dimming (DV)	Advance Mark 7 & Mark 10, Lutron Ecosystem Digital or 3-Wire
EMERGENCY		IOTA ISL-42-EM-B (1 Lamp 26w-425 lm/90 min)
LM-79	On request	
WARRANTY	5 years	1 year



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com





3414
3414B



3414
INDIRECT

3414B
DIRECT-INDIRECT

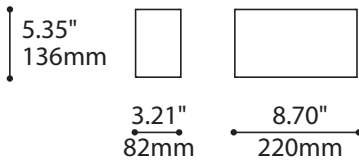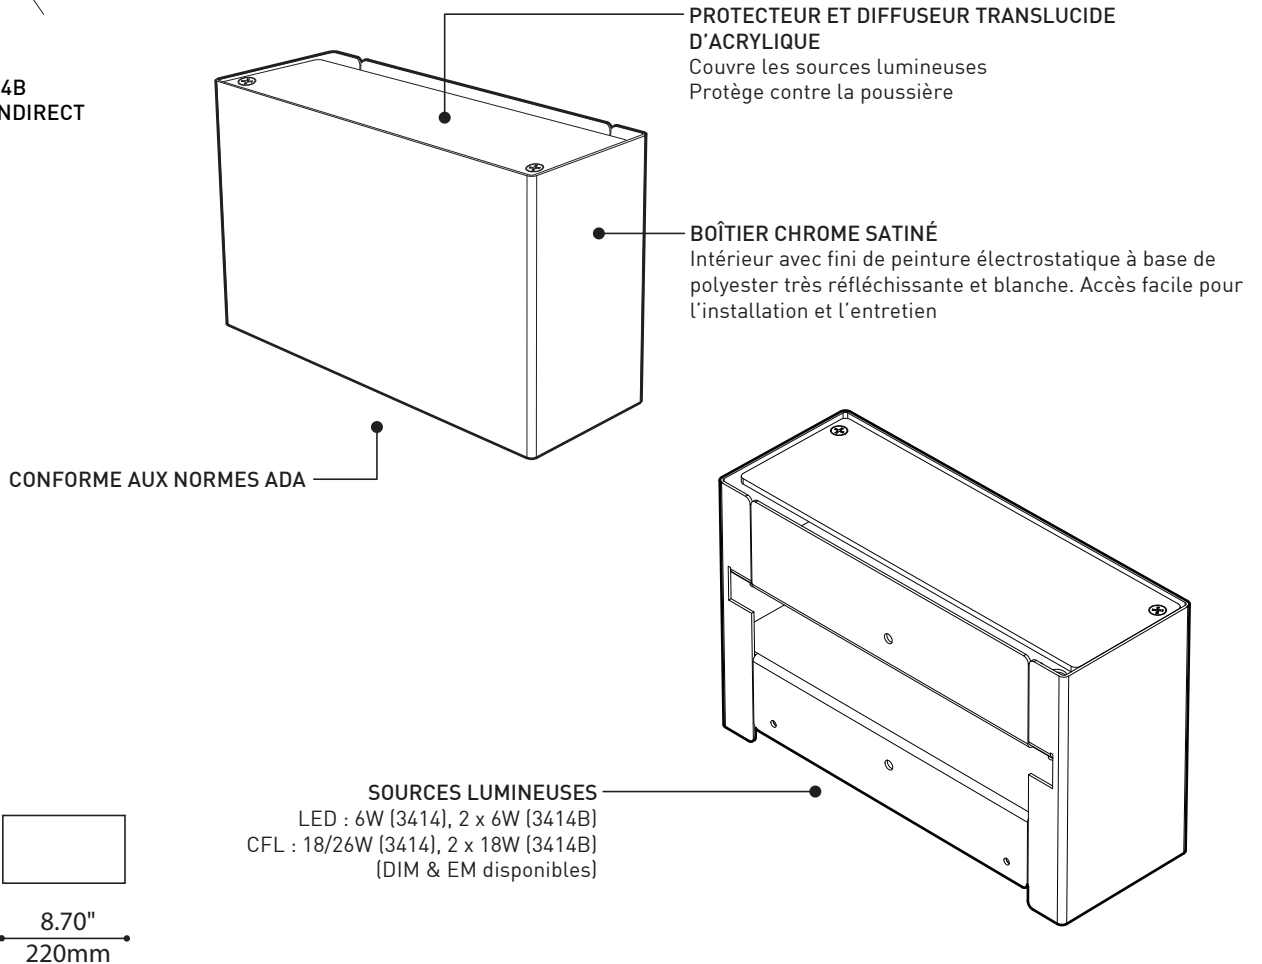

SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS (ESTIMÉS)

IRC

ROHS

BOÎTIER

RADIATEUR

DISTRIBUTION LUMINEUSE

DIFFUSEUR

VOLTAGE

PILOTE / BALLAST

GRADATION

URGENCE

LM-79

GARANTIE

DEL

1 x 6W (3414) / 2 x 6W (3414B) Luxeon Rebel

Reconnu par UL - Fabriqué aux États-Unis

1 x 6W (3414): 510 lm / 2 x 6W (3414B): 1020 lm

85 IRC (typique)

Conforme

Acier embouti avec fini chrome satiné

Aluminium

Indirect / Direct-Indirect

Acrylique translucide

120V ou 277V

Hatch 700 mA

Gradation phase (DP) ou Gradation 0-10V (DV)

Sur demande

5 ans

FLUORESCENT

1 x 18 ou 26W CFL (3414) / 2 x 18w CFL (3414B)

1250 lm/lamp (18W) & 1800 lm/lamp (26W)

Acier embouti avec fini chrome satiné

Indirect / Direct-Indirect

Acrylique translucide

120-277/347V, 120-277V (à intensité variable)

Universel

Advance Mark 7 & Mark 10, Lutron Ecosystem Digital ou 3-Fils

IOTA ISL-42-EM-B (1 Source 26w-425 lm/90 min)

1 an



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



3414
3414B