


# RIVER - 3803 ROUND SURFACE

PROJECT PROJET
SPEC TYPE
NOTES



## FINISH FINI

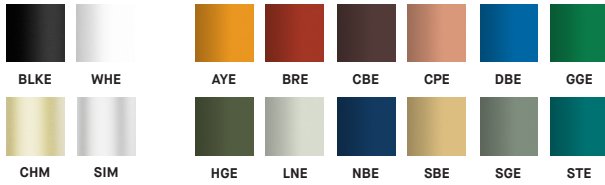

## FAMILY FAMILLE




PENDANT 4803-R36

PENDANT 4803-R50

PENDANT 4803-R72

## DRIVER OPTION OPTION DE PILOTE

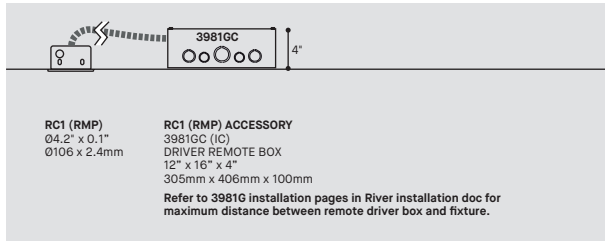

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

### MODEL MODÈLE

3803-R36 RIVER ROUND SURFACE 36"  
3803-R50 RIVER ROUND SUFRACE 50"  
3803-R72 RIVER ROUND SUFRACE 72"

### LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

22 2200K  
27 2700K  
30 3000K  
35 3500K

### COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

### VOLTAGE VOLTAGE

120V 120 VOLT  
277V 277 VOLT

### CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)  
NLTAIR2\* NLIGHT AIR CONTROL GEN 2  
NLIGHT\* NLIGHT WIRED CONTROL  
\* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT)  
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.  
\* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

### EMERGENCY BATTERY BATTERIE D'URGENCE

EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS

EMB\* EMERGENCY BATTERY FOR REMOTE BOX  
\* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION

### MOUNTING PLATE & BLOCK FINISH FINI PLAQUE DE MONTAGE ET BLOC

BLKE BLACK FINE TEXTURE  
WHE WHITE FINE TEXTURE  
MATCH\* COLOR MATCH WITH BRACKET  
\* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### BRACKET FINISH FINI BRACKET

BLKE BLACK	GGE* GRASS GREEN
WHE WHITE	HGE* HUNTER GREEN
CHM* CHAMPAGNE METALLIC	LNE* LUNAR GREY
SIM* SILVER METALLIC	NBE* NAVY BLUE
AYE* APRICOT YELLOW	SBE* SAND BEIGE
BRE* BRICK RED	SGE* SAGE GREY
CBE* CHOCOLATE BROWN	STE* SUMMER TEAL
CPE* CLAY PINK	RAL** PLEASE SPECIFY RAL CODE
DBE* DYNAMIC BLUE	

ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM.  
\* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.  
\*\* SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

### ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING

39NLAA\* NLIGHT AIR GEN 2 REMOTE POWER PACK  
39NLWA\* NLIGHT WIRED REMOTE POWER PACK  
3981GC DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"

### ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

# RIVER 4803/3803

## 360 FLEXIBLE LED

Providing a soft 360 degree glow, the silicone molded light engine adapts seamlessly to any shape.

Available in 2200K, 2700K, 3000K and 3500K

## POWER OVER AIRCRAFT

The cordless fixture is entirely powered by the aircraft cables, allowing for a minimalist installation.


Also available in surface mount.

## BRACKET


A sleek aluminum bracket adds a pop of color to the fixture. Available in a variety of 16 finishes.

## LARGE SCALE 3D print


Rib textured plastic is entirely 3D printed in clear PETG, allowing for many shapes and sizes.




4803-STRAIGHT  
32" / 52"




4803-ROUND  
36" / 50" / 72"




4803-SQUARE  
36" / 56" / 72"



4803-OBLONG  
36" / 48" / 68"



4803-FREEFORM  
65"



4803-LAGOON  
58"

## PRODUCT SPECIFICATION

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
<b>PERFORMANCE</b>	REG	REG	REG	REG	REG	REG
<b>SYSTEM WATTAGE</b>	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
<b>DELIVERED LUMENS (4000K)</b>	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
<b>EFFICACY</b>	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
<b>OTHER INFORMATION</b>						
<b>LUMINAIRE'S WEIGHT</b>	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Refer to installation sheets for weight per configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
<b>L70 (LUMEN MAINTENANCE)</b>	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

## EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visit our website for warranty terms and conditions.



## TECHNICAL DATA

# RIVER 4803/3803

## SOURCE DEL FLEXIBLE 360°

Offrant une lumière douce et enveloppante sur 360°, la source DEL moulée en silicone s'adapte parfaitement à toutes les formes.

Offerte en 2200K, 2700K, 3000K et 3500K.

## ALIMENTATION INTÉGRÉE AUX CÂBLES

Entièrement alimenté par ses câbles de suspension conducteurs, le luminaire se dispense de toute alimentation apparente, permettant une installation d'une grande pureté visuelle.

Disponible également en version en surface.

## SUPPORT EN ALUMINIUM

Épuré et graphique, le support en aluminium apporte une touche de couleur au luminaire. Offert dans une palette de 16 finis.

## IMPRESSION 3D GRAND FORMAT


Le diffuseur nervuré en PETG transparent est entièrement imprimé en 3D, permettant une grande diversité de formes et de dimensions.




4803-STRAIGHT  
32" / 52"




4803-ROUND  
36" / 50" / 72"




4803-SQUARE  
36" / 56" / 72"



4803-OBLONG  
36" / 48" / 68"



4803-FREEFORM  
65"



4803-LAGOON  
58"

## SPECIFICATIONS PRODUIT

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
<b>PERFORMANCE</b>	<b>REG</b>	<b>REG</b>	<b>REG</b>	<b>REG</b>	<b>REG</b>	<b>REG</b>
<b>PUISSANCE TOTALE</b>	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
<b>LUMENS RÉELS (4000K)</b>	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
<b>EFFICACITÉ</b>	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
<b>OTHER INFORMATION</b>						
<b>POIDS DU LUMINAIRE</b>	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Se référer à la feuille d'installation pour connaître le poids spécifique à chaque configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
<b>L70 (MAINTENANCE DE LA LUMIÈRE)</b>	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

## FACTEUR D'EFFICACITÉ

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visitez notre site Web pour les termes et conditions.