

MEHA 4029-UAC / FACET 4029-UFC

PROJECT PROJET

SPEC TYPE

NOTES




OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	LED*	LED DIM*
MOUNTING	2401C	2403G
CABLE	65.85"	67.10"

*FOR CABLE ≤12IN -CANOPY 2401C + ACCESSORY 3983

MOUNTING OPTIONS OPTIONS DE MONTAGE



STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

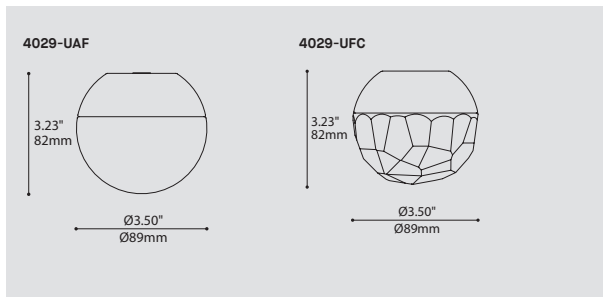

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE



CODE

MODEL MODÈLE

4029-UAC MEHA
4029-UFC FACET

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, OTHER INFO)

LED.1*  1W, LED
LED.4  4W, LED
*NOT AVAILABLE WITH DIMMING, 2700K AND 90 CRI

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K
30 3000K
35 3500K
40** 4000K

*FOR LED 4W ONLY
**LONGER LEAD TIME MAY APPLY.PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI
FOR LED 4W ONLY - MANDATORY

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)
DIMMING AVAILABLE WITH 4W ONLY

CABLE CABLE



C CLEAR CABLE, FIELD ADJUSTABLE

C

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGHT)
** CUSTOM CABLE LENGH (PLEASE SPECIFY)*
*3983 ACCESSORY PROVIDED FOR CABLE ≤ 12"
*MAX CABLE LENGTH 120" FOR NON-DIMMING
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC  ROUND CANOPY / PAVILLON ROND
 FOR NON-DIMMING LED & CABLE ≤ 12": 0.50" CANOPY (2401C)
FOR DIMMING LED: 1.50" CANOPY (2403G)

CANOPY FINISH FINI PAVILLON

SC SATIN CHROME

SC

HEATSINK FINISH FINI RADIATEUR

SAA SATIN ALUMINUM ANODIZED

SAA

DIFFUSER FINISH FINI DIFFUSEUR

CLR CLEAR
FRO FROSTED

ACCESSORY ACCESSOIRE

3983 DEEP JUNCTION BOX FOR CABLE ≤ 12" AS PER ABOVE



PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN: Meha and her edgy sister, Facet, are decorative spheres of light that can be used as single elegant geometrical objects to punctuate a space or in multiples to create illuminated clouds and populate larger areas.

CONSTRUCTION: Satin aluminum anodized heat sink and heavy pressed glass diffuser with smooth (UAC) or faceted (UFC) surface.


CERTIFIED: c-CSA-us

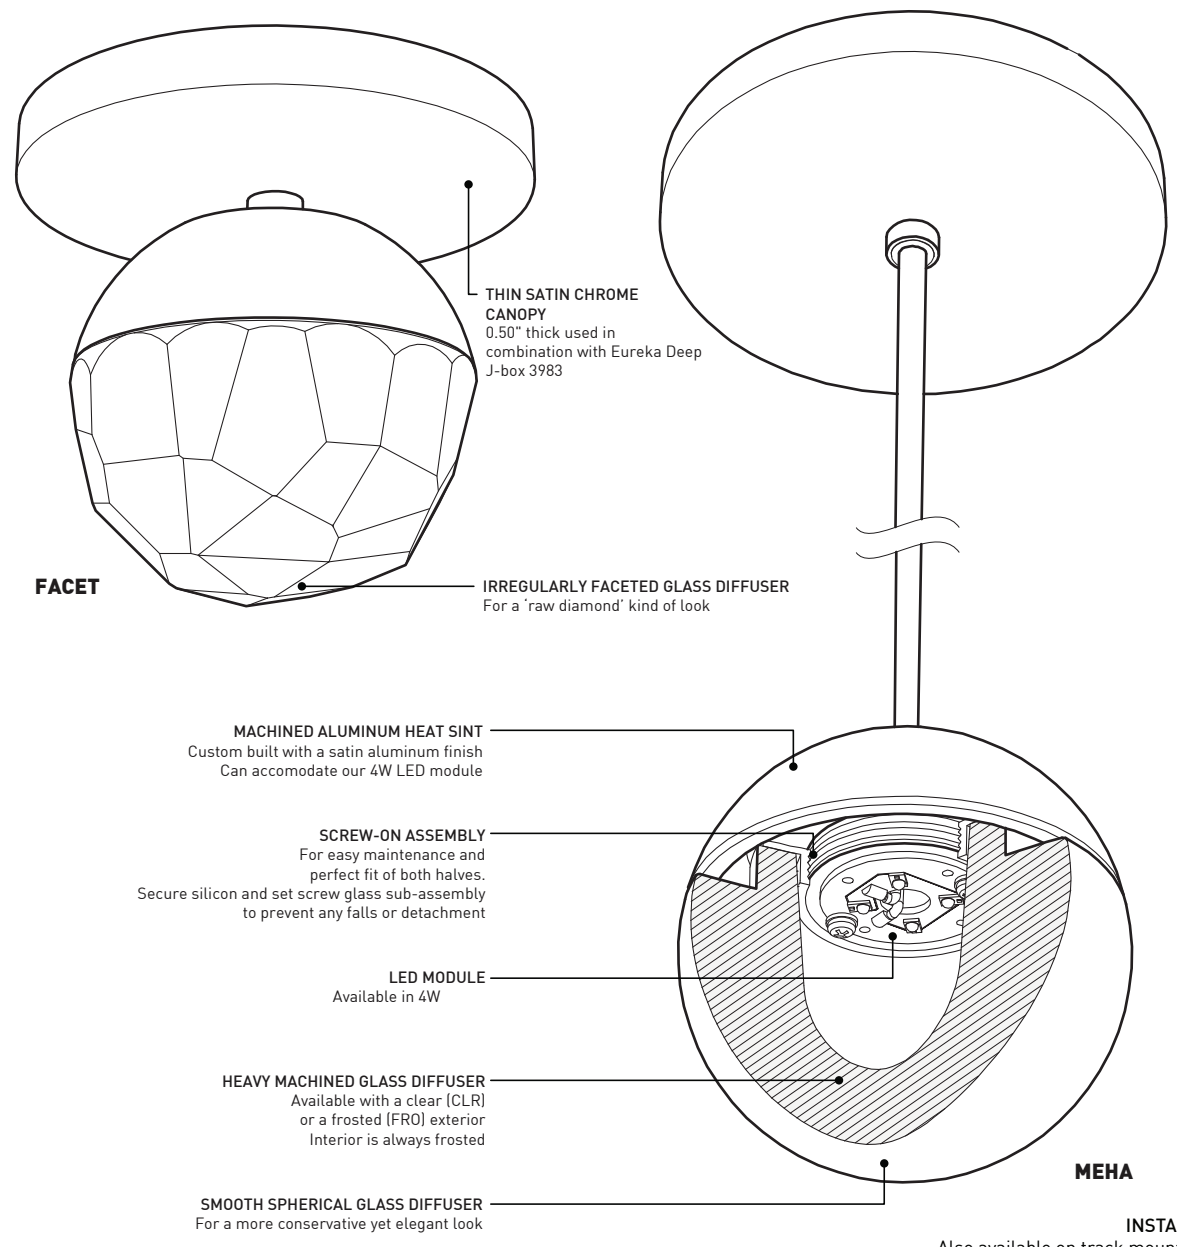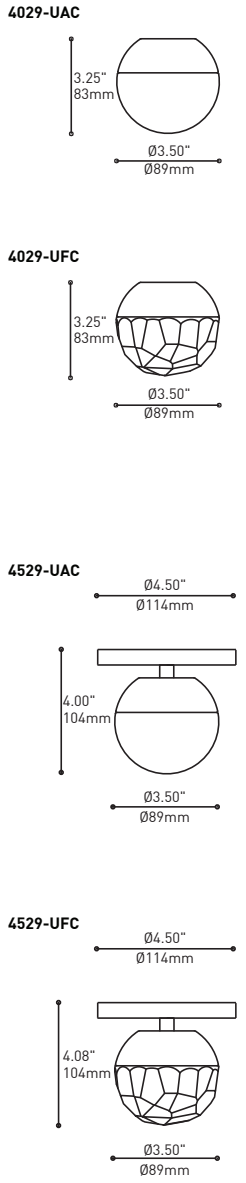


INSTALLATION
Also available on track mount adaptor

SPECIFICATIONS

	1W LED	4W LED
LIGHT SOURCE	4 x high powered LEDs on MCPCB - total ±1 w	4 x high powered LEDs on MCPCB - total ±4 w
MODULE	UL recognized - made in USA	
DELIVERED LUMENS	105lm (4000K)	400 lm (4000K)
CRI	80 CRI (typical)	
LIGHT DISTRIBUTION	Direct	
HEATSINK	Machined aluminum with satin aluminum finish	
DIFFUSER	Heavy machined glass available in clear-frost(CLR) and frost(FRO) and smooth(UAC) or faceted(UFC)	
VOLTAGE	120V (DP) or 120-277V (DV or non-dimming)	
DRIVER	Constant Current driver 350 mA, UL Recognized	
DIMMING	Phase Dimming (DP) and 0-10V Dimming (DV)	
LM-79	On request	
WARRANTY	5 years (on electronic components)	
CERTIFICATION	CSA recognized	








225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalinghting.com



4029-UAC
4029-UFC

4529-UAC
4529-UFC

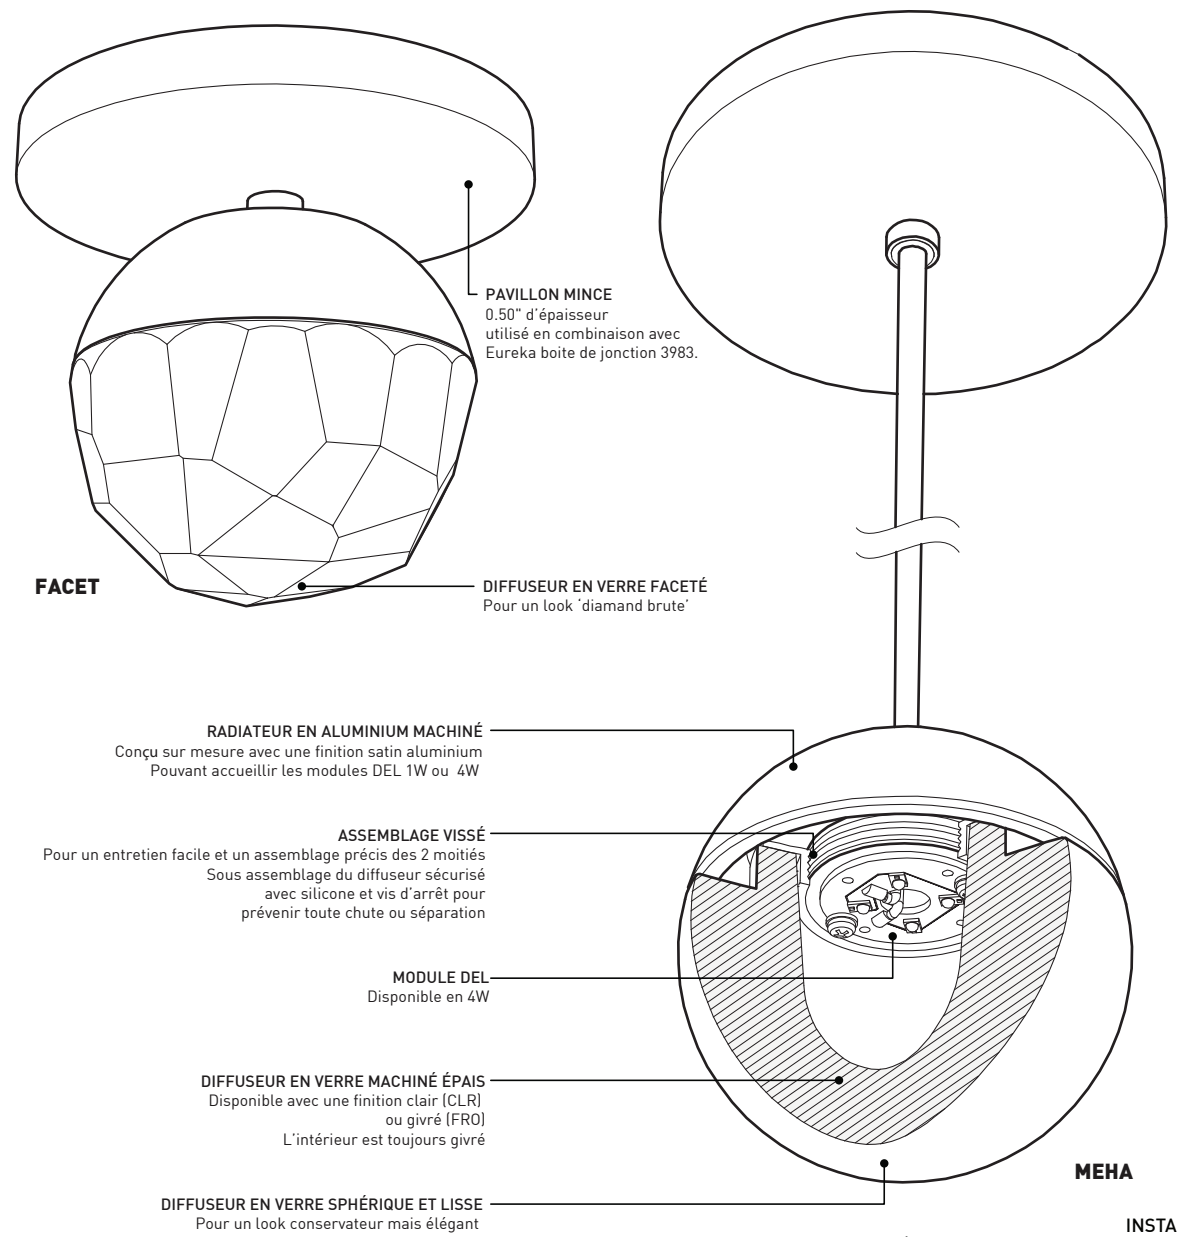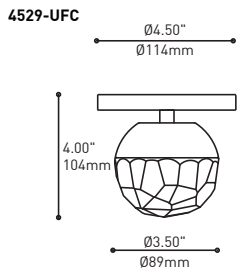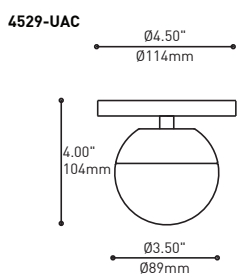

INSTALLATION

Également disponible sur système de rails

SPÉCIFICATIONS

	1W LED	DEL 4W
SOURCE LUMINEUSE	4 x high powered LEDs on MCPCB - total ±1 w	4 DEL 1W haute puissance sur MCPCB - total ±4 w
MODULE	Reconnue par UL - Fabriqué aux États-Unis	
LUMENS RÉELS	105lm (4000K)	400 lm (4000K)
IRC	80 CRI (typique)	
DISTRIBUTION LUMINEUSE	Direct	
RADIATEUR	Aluminium machiné avec finition satin aluminium	
DIFFUSEUR	Verre machiné épais disponible en clair (CLR) et en givré (FRO) ainsi qu'en lisse (UAC) ou faceté (UFC)	
VOLTAGE	120V (DP) ou 120-277V (DV ou sans intensité variable)	
DRIVER	Pilote constant courant 350 mA, reconnu UL	
GRADATION	Gradation de type 'Phase Dimming' (DP) et de type '0-10V Dimming' (DV)	
LM-79	Sur demande	
WARRANTY	5 ans (sur les composantes électroniques)	
CERTIFICATION	Reconnu pas CSA	



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4029-UAC
4029-UFC

4529-UAC
4529-UFC