

MEHA 4029-UAC / FACET 4029-UFC

PROJECT PROJÉT

SPEC TYPE


NOTES





OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED*	LED DIM*
MOUNTING	2401C	2403G
CABLE	65.85"	67.10"
*FOR CABLE ≤12IN -CANOPY 2401C + ACCESSORY 3983		

MOUNTING OPTIONS OPTIONS DE MONTAGE

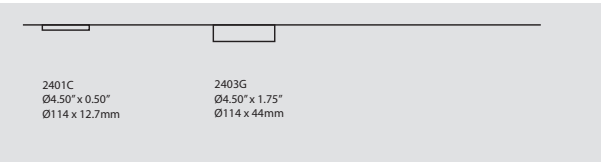

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

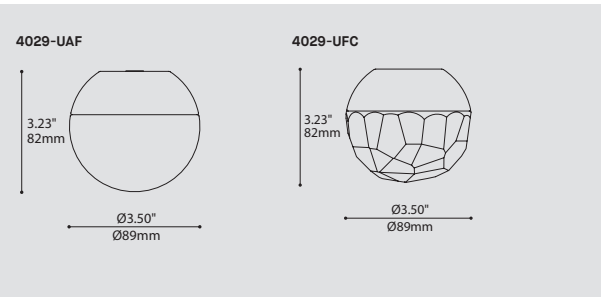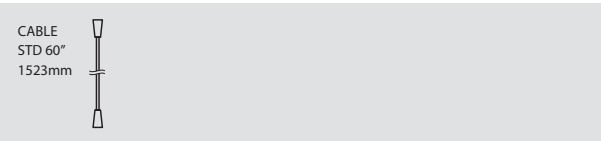


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		
4029-UAC	MEHA	
4029-UFC	FACET	
LIGHT SOURCE SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.1*		1W, LED
LED.4		4W, LED
*NOT AVAILABLE WITH DIMMING, 2700K AND 90 CRI		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*		2700K
30		3000K
35		3500K
40**		4000K
*FOR LED 4W ONLY		
**LONGER LEAD TIME MAY APPLY.PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
90		90+ CRI
FOR LED 4W ONLY - MANDATORY		
VOLTAGE VOLTAGE		
120V		120 VOLT
277V		277 VOLT
DIMMING OPTION OPTION DE GRADATION		
DV		0-10V DIMMING (120-277V)
DP		PHASE DIMMING (120V ONLY)
DIMMING AVAILABLE WITH 4W ONLY		
CABLE CABLE		C
C		CLEAR CABLE, FIELD ADJUSTABLE
CABLE LENGTH LONGUEUR DE CABLE		
60		60" CABLE (STD LENGHT)
**		CUSTOM CABLE LENGH (PLEASE SPECIFY)*
*3983 ACCESSORY PROVIDED FOR CABLE ≤ 12"		
*MAX CABLE LENGTH 120" FOR NON-DIMMING		
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		
RC		ROUND CANOPY / PAVILLON ROND
FOR NON-DIMMING LED & CABLE ≤ 12": 0.50" CANOPY (2401C)		
FOR DIMMING LED: 1.50" CANOPY (2403G)		
CANOPY FINISH FINI PAVILLON		S C
S C		SATIN CHROME
HEATSINK FINISH FINI RADIATEUR		SAA
SAA		SATIN ALUMINUM ANODIZED
DIFFUSER FINISH FINI DIFFUSEUR		
CLR		CLEAR
FRO		FROSTED
ACCESSORY ACCESSOIRE		
3983		DEEP JUNCTION BOX FOR CABLE ≤ 12" AS PER ABOVE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	Meha and her edgy sister, Facet, are decorative spheres of light that can be used as single elegant geometrical objects to punctuate a space or in multiples to create illuminated clouds and populate larger areas.
CONSTRUCTION:	Satin aluminum anodized heat sink and heavy pressed glass diffuser with smooth (UAC) or faceted (UFC) surface.
CERTIFIED:	c-CSA-us


4029-UAC





4029-UFC



4529-UAC



4529-UFC

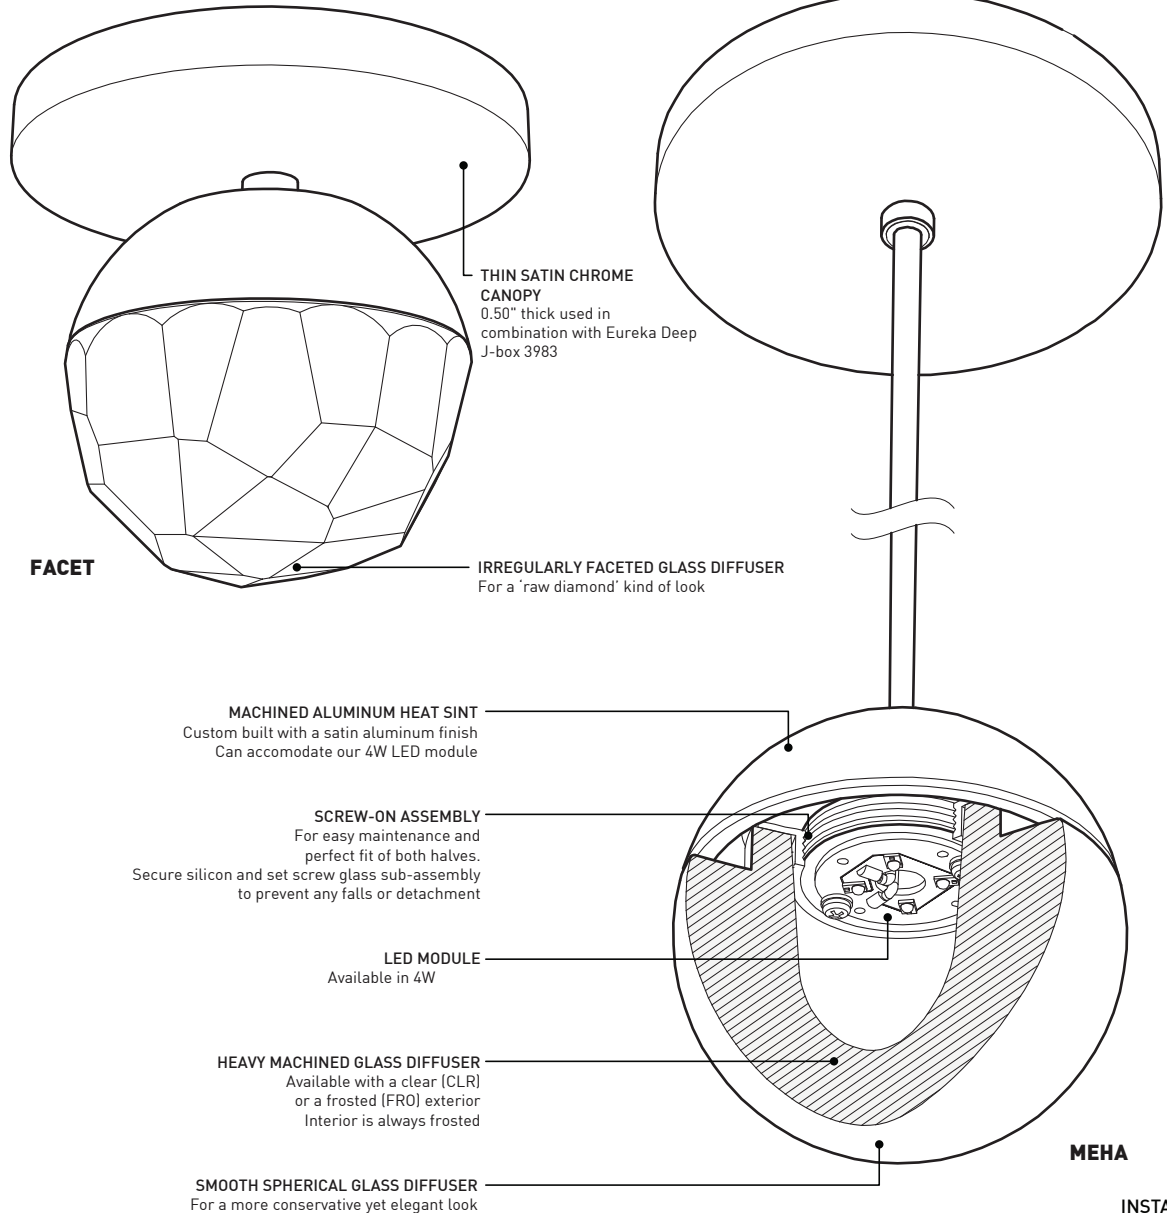

SPECIFICATIONS

LIGHT SOURCE

MODULE

DELIVERED LUMENS

CRI

LIGHT DISTRIBUTION

HEATSINK

DIFFUSER

VOLTAGE

DRIVER

DIMMING

LM-79

WARRANTY

CERTIFICATION

1W LED

4 x high powered LEDs on MCPCB - total ± 1 w

UL recognized - made in USA

105lm (4000K)

80 CRI (typical)

Direct

Machined aluminum with satin aluminum finish

Heavy machined glass available in clear-frost (CLR) and frost (FRO) and smooth (UAC) or faceted (UFC)

120V (DP) or 120-277V (DV or non-dimming)

Constant Current driver 350 mA, UL Recognized

Phase Dimming (DP) and 0-10V Dimming (DV)

On request

5 years (on electronic components)

CSA recognized

4W LED

4 x high powered LEDs on MCPCB - total ± 4 w

400 lm (4000K)




225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com




4029-UAC
4029-UFC

4529-UAC
4529-UFC



4029-UAC






4029-UFC



4529-UAC



4529-UFC

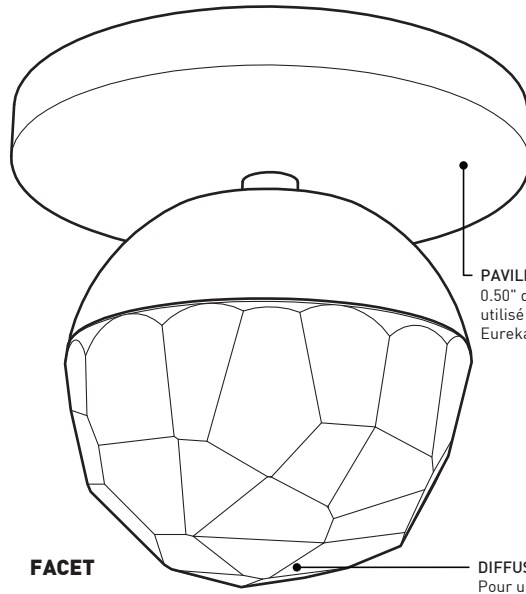

PAVILLON MINCE
0.50" d'épaisseur
utilisé en combinaison avec
Eureka boîte de jonction 3983.

FACET

DIFFUSEUR EN VERRE FACETÉ
Pour un look 'diamond brute'


RADIATEUR EN ALUMINIUM MACHINÉ
Conçu sur mesure avec une finition satin aluminium
Pouvant accueillir les modules DEL 1W ou 4W

ASSEMBLAGE VISSÉ
Pour un entretien facile et un assemblage précis des 2 moitiés
Sous assemblage du diffuseur sécurisé
avec silicone et vis d'arrêt pour
prévenir toute chute ou séparation

MODULE DEL
Disponible en 4W

DIFFUSEUR EN VERRE MACHINÉ ÉPAIS
Disponible avec une finition clair (CLR)
ou givré (FRO)
L'intérieur est toujours givré

DIFFUSEUR EN VERRE SPHÉRIQUE ET LISSE
Pour un look conservateur mais élégant

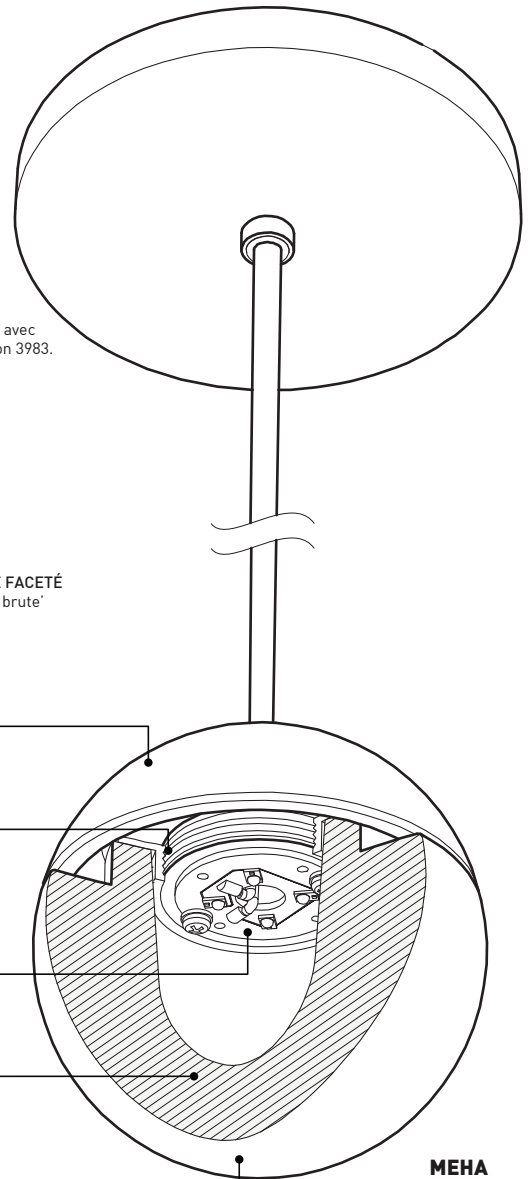

MEHA

INSTALLATION
Également disponible sur système de rails

SPÉCIFICATIONS

SOURCE LUMINEUSE

MODULE

LUMENS RÉELS

IRC

DISTRIBUTION LUMINEUSE

RADIATEUR

DIFFUSEUR

VOLTAGE

DRIVER

GRADATION

LM-79

WARRANTY

CERTIFICATION

1W LED

4 x high powered LEDs on MCPCB - total ± 1 w

Reconnue par UL - Fabriqué aux États-Unis

105lm (4000K)

80 CRI (typique)

Direct

Aluminium machiné avec finition satin aluminium

Verre machiné épais disponible en clair (CLR) et en givré (FRO) ainsi qu'en lisse (UAC) ou faceté (UFC)

120V (DP) ou 120-277V (DV ou sans intensité variable)

Pilote constant courant 350 mA, reconnu UL

Gradation de type 'Phase Dimming' (DP) et de type '0-10V Dimming' (DV)

Sur demande

5 ans (sur les composantes électroniques)

Reconnu pas CSA

DEL 4W

4 DEL 1W haute puissance sur MCPCB - total ± 4 w

400 lm (4000K)



225 de Liège Ouest, Suite #200
Montréal (QC), Canada H2P 1H4
Tel : 514.385.3515 Fax : 514.385.4169
www.eurekalighting.com



4029-UAC
4029-UFC

4529-UAC
4529-UFC