

POINT 4044

PROJECT PROJET
SPEC TYPE
NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	LED 8W TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	LED *	LED DIM * & 8W 277V *
MOUNTING	2734B	2734E	2401C	2403G
CABLE	66.90"	68.60"	67.10"	68.10"
STEM	42.90"	44.60"	42.10"	43.10"

*FOR NO STEM / STEM ≤ 12IN -CANOPY 2401C + ACCESSORY 3983


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734B	2734E	2401C	2403G
1.46" x 1.36" 37 x 35mm	6.15" x 2.00" 156 x 51mm	Ø4.50" x 0.50" Ø114 x 13mm	Ø4.50" x 1.50" Ø114 x 38mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	AC CABLE STD 60" 1523mm
--------------------------	-------------------------------

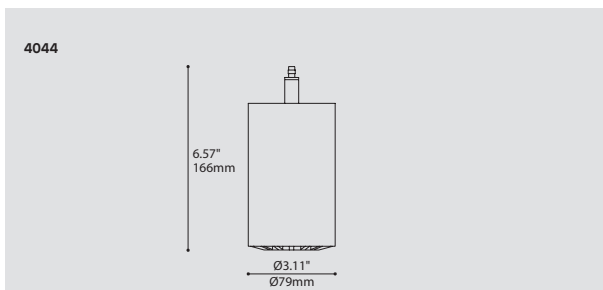

ORDERING SPECIFICATION	SPECIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4044 POINT (PENDANT)	4044
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, OTHER INFO) LED.8 8W, LED LED.11 11W, LED LED.18 18W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	30 3000K 35 3500K 40 4000K	
ANGLE BEAM ANGLE DE DIFFUSION	LED.8 17 17° 48 48° LED.11, LED.18 20 20° 40 40°	
VOLTAGE VOLTAGE	120V 120 VOLT 277V* 277 VOLT *NOT AVAILABLE WITH A TRACK ADAPTOR	
DIMMING OPTION OPTION DE GRADATION	DV* 0-10V DIMMING (120-277V) DP PHASE DIMMING (120V ONLY) LED DIMMING DRIVER IS STANDARD FOR 11W & 18W. PLEASE SPECIFY YOUR DIMMING TYPE. *NOT AVAILABLE WITH A TRACK ADAPTOR	
STEM OR CABLE TIGE OU CABLE	S10 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE	36 36" STEM (STD LENGTH) 60 60" AIRCRAFT CABLE (STD LENGTH) ** CUSTOM STEM LENGTH (PLEASE SPECIFY)* ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)* FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE. *3983 ACCESSORY PROVIDED FOR STEM/CABLE ≤ 12". EXCEPT LED 8W 120V NON-DIMMING	
MOUNTING MONTAGE	RC* ROUND CANOPY / PAVILLON ROND FOR LED 8W 120V NON-DIMMING & STEM/CABLE ≤ 12": 0.50" CANOPY (2401C) FOR DIMMING LED, LED 8W 277V: 1.75" CANOPY (2403G) *CANOPY FINISH ALWAYS CHROME TA1 TRACK ADAPTOR / ADAPTEUR DE RAIL 1 CIRCUIT LED 120V ADAPTOR (2734B) (FOR LED 8W NON-DIMMING ONLY) LED DIMMING 120V ADAPTOR (2734E)	
MOUNTING OPTION OPTION DE MONTAGE	SCA* SLOPE CEILING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM	
TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL ^(A)	WH WHITE BLK BLACK M G METALLIC GRAY (2734B ONLY) ^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED. OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE	CHR CHROME	CHR
CYLINDER FINISH FINI CYLINDRE	BLKA BLACK ANODIZED SA SATIN ALUMINUM WHE WHITE FINE TEXTURE	
HEATSINK FINISH FINI RADIATEUR	BLKA BLACK ANODIZED	BLKA
ACCESSORY ACCESSOIRE	3983 DEEP JUNCTION BOX (PROVIDED FOR STEM ≤ 12" AS PER ABOVE)	


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ANATOMY



POINT

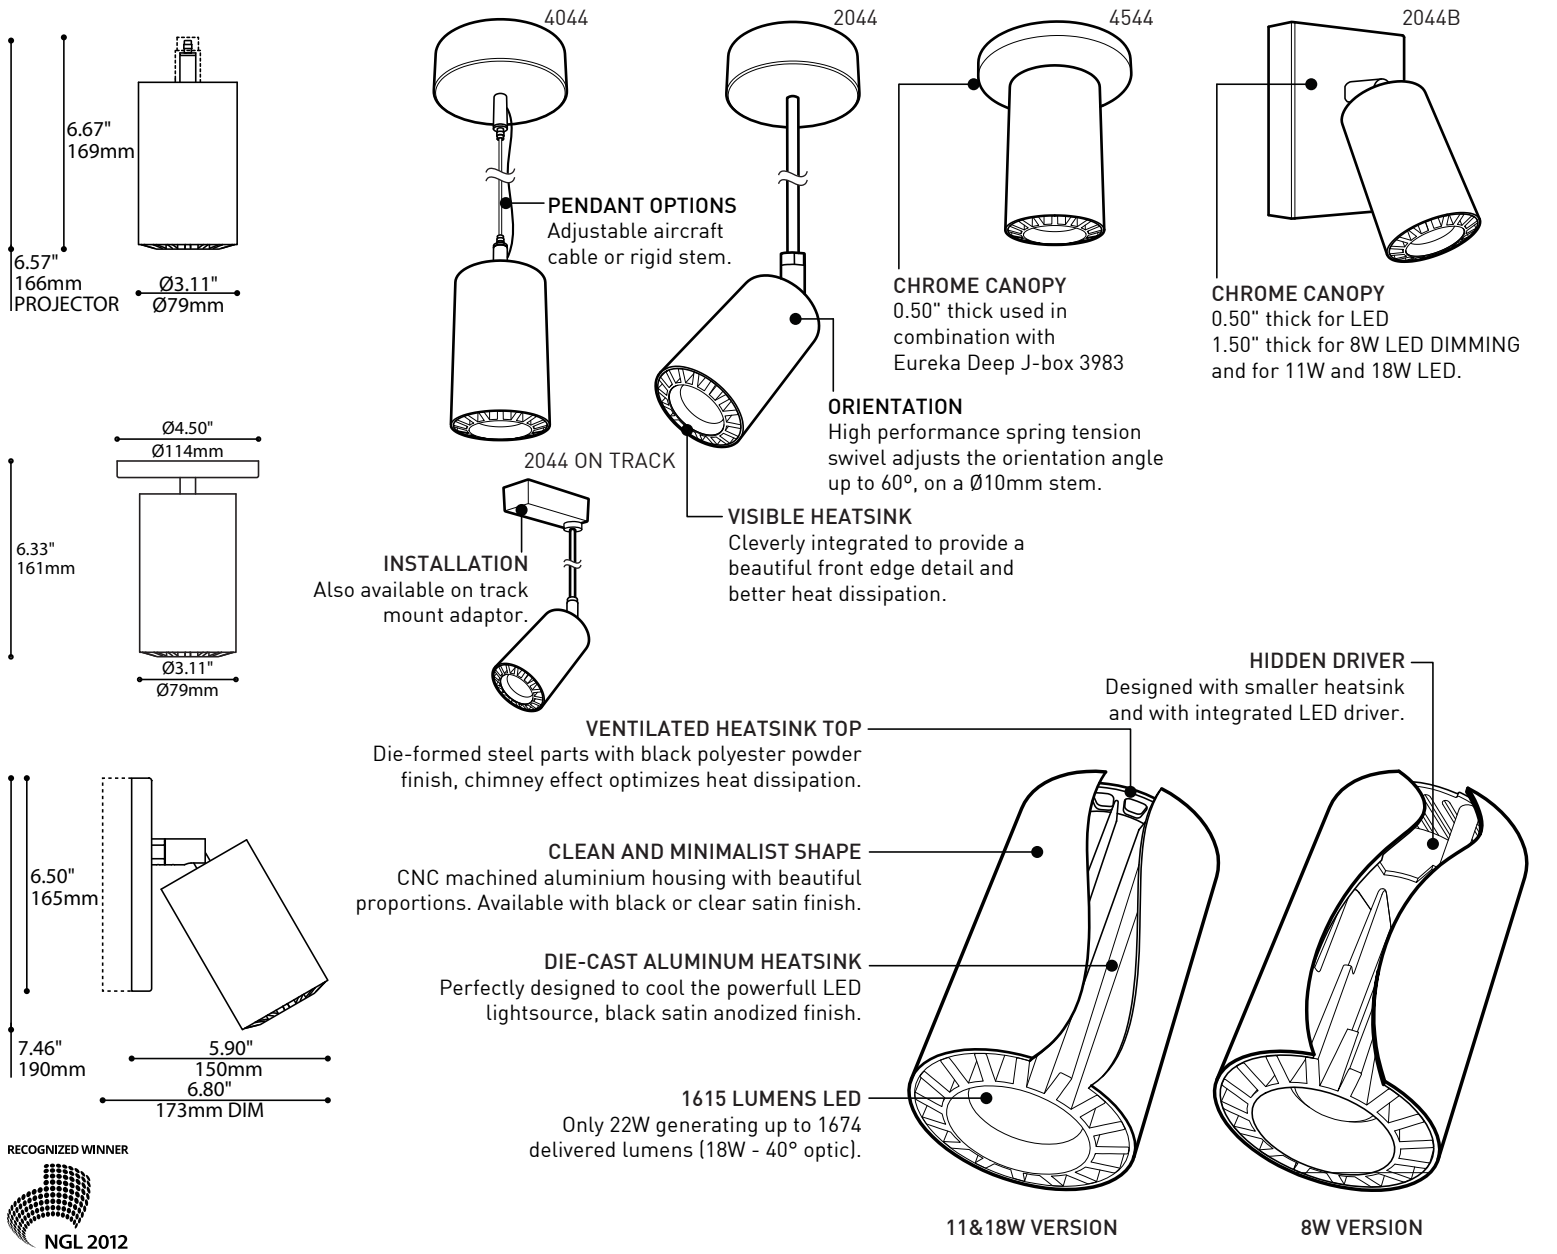


SPECIFICATIONS

	8W LED	11W LED	18W LED
LIGHT SOURCE	4 LED on MCPCB - System wattage 10W Total	1 x COB LED - System wattage 15W Total	1 x COB LED - System wattage 22W Total
DELIVERED LUMENS	964 lm	1438 lm [40° optic] or 1457 lm [20° optic]	1858 lm [40° optic] or 1882 lm [20° optic]
CRI	80 CRI (typical)		
CCT	3-step MacAdam Ellipse binning		
HOUSING	Machined aluminium tube		
HEATSINK	Black anodized aluminum		
LIGHT DISTRIBUTION	Directional (2044/2044B) or Direct (4044/4544)		
OPTICS	Total Internal Reflection (TIR) - 17° & 48°	TIR - 20° & 40°	TIR - 20° & 40°
VOLTAGE	120V or 277V	120V (DP) and 120-277V (DV)	120V (DP) and 120-277V (DV)
DRIVER	Constant Current 700mA, UL Recognized	Constant Current 350mA, UL Recognized	Constant Current 500mA, UL Recognized
DIMMING	Phase Dimming (DP) and 0-10V Dimming (DV)		
LM-79	On request	On request	On request
WARRANTY	5 years		

225 de Liège Ouest, Suite #200
 Montréal (QC), Canada H2P 1H4
 Tel : 514.385.3515 Fax : 514.385.4169
 www.eurekalighting.com

2044 4044
2044B 4544

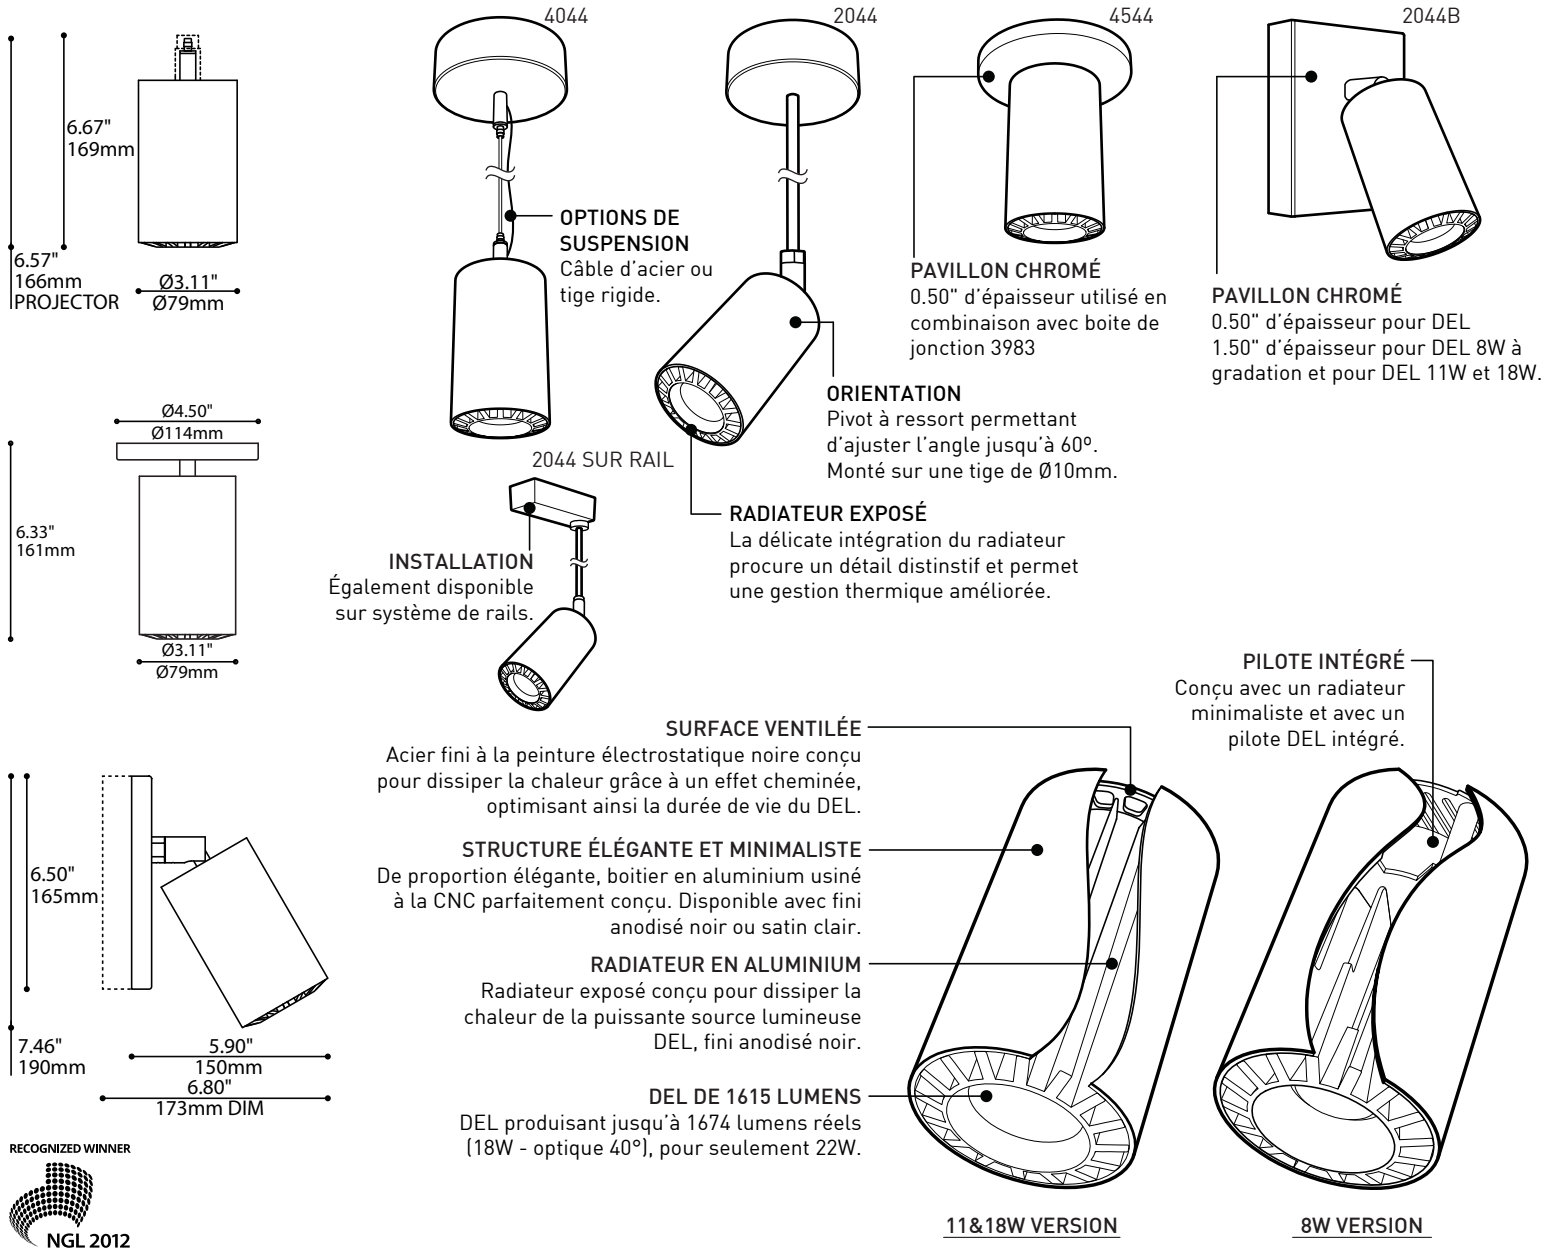

RECOGNIZED WINNER



SPECIFICATIONS

SOURCE LUMINEUSE
LUMENS RÉELS

IRC

CCT

BOÎTIER

RADIATEUR

DISTRIBUTION LUMINEUSE

OPTIQUES

VOLTAGE

PILOTE

GRADATION

LM-79

GARANTIE

DEL 8W

4 LED sur MCPCB - Puissance totale de 10W
964lm

80 CRI (typique)

3-step MacAdam Ellipse binning

Tube d'aluminium usiné

Aluminium anodisé noir

Directionnel (2044/2044B) ou direct (4044/4544)

17° & 48° Reflection Totale Interne (TIR)

120V ou 277V

Courant Constant 700mA, Reconnu UL

DP "phase dimming" et DV "0-10V dimming"

Sur demande

5 ans

DEL 11W

1 DEL "COB" - Puissance totale de 15W
1438lm (optique 40°) ou 1457 lm (20°)

Faisceaux de 20° & 40° "TIR"

120V (DP) et 120-277V (DV)

Courant Constant 350mA, Reconnu UL

Sur demande

Sur demande

DEL 18W

1 DEL "COB" - Puissance totale 22W
1858 lm (optique 40°) ou 1882 lm (20°)

Faisceaux de 20° & 40° "TIR"

120V (DP) et 120-277V (DV)

Courant Constant 500mA, Reconnu UL

Sur demande

Sur demande