

SCOUT ORB PENDANT 4048/4049-ORB

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH



MOUNTING OPTIONS OPTIONS DE MONTAGE

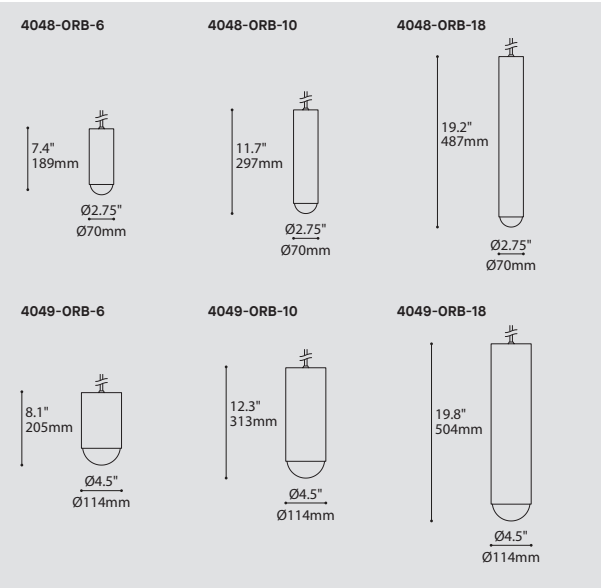

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL	MODÈLE				
4048-ORB-6	SCOUT ORB 02.75 - 6"				
4048-ORB-10	SCOUT ORB 02.75 - 10"				
4048-ORB-18	SCOUT ORB 02.75 - 18"				
4049-ORB-6	SCOUT ORB 04.5 - 6"				
4049-ORB-10	SCOUT ORB 04.5 - 10"				
4049-ORB-18	SCOUT ORB 04.5 - 18"				
LIGHT SOURCE	SOURCE LUMINEUSE				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
COLOR TEMPERATURE	TEMPÉRATURE DE COULEUR				
27	2700K				
30	3000K				
35	3500K				
40*	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI)	INDICE DE RENDU DE COULEUR (IRC)			90	
90	90+ CRI				
VOLTAGE	VOLTAGE				
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION	OPTION DE CONTRÔLE				
DP*	PHASE DIMMING (120V ONLY)				
DV	0-10V DIMMING (120V-277V)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
* REQUIRES RC2 CANOPY					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS,PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
EMERGENCY BATTERY	BATTERIE D'URGENCE				
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION					
STEM OR CABLE	TIGE OU CÂBLE				
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE				
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE				
C2**	AIRCRAFT SUSPENSION WITH BLACK OR WHITE CABLE, FIELD ADJUSTABLE				
* FOR 4048-ORB CONFIGURATIONS ONLY					
** FOR 4049-ORB CONFIGURATIONS ONLY					
STEM OR CABLE LENGTH	LONGUEUR DE TIGE OU CÂBLE				
36	36" CABLE (STD LENGTH)				
60	60" CABLE (STD LENGTH)				
**	CUSTOM CABLE OR STEM LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING	MONTAGE				
	ROUND CANOPY / PAVILLON ROND				
RC1*	SCREWLESS 0.5" CANOPY (2471C)				
RC2	NLIGHT SCREWLESS CANOPY Y 07.75" X 1.30" (2474H)				
* 3983 ACCESSORY PROVIDED FOR 4048-ORB-6 AND 4049-ORB-6 WITH 2471C CANOPY					
CANOPY FINISH	FINI PAVILLON				
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
MATCH*	COLOR MATCH WITH TUBE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
POWER CORD OR STEM FINISH	FINI CÂBLE D'ALIMENTATION OU TIGE				
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
BLKE	BLACK STEM				
WHE	WHITE STEM				
MATCH*	COLOR MATCH WITH TUBE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
TUBE FINISH	FINI TUBE				
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
ACCESSORY	ACCESSOIRE				
3983	DEEP JUNCTION BOX (PROVIDED FOR 4048-ORB-6 AND 4049-ORB-6 WITH CANOPY)				
ACCESSORY EMERGENCY BATTERY	ACCESSOIRE BATTERIE D'URGENCE				
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				

SCOUT - FINISH OPTIONS / OPTIONS DE FINIS Standard



BLKE
Black Textured



WHE
White Textured

Metallic



CHM
Champagne



SIM
Silver


Premium



AYE
Apricot
Yellow
Textured



BRE
Brick Red
Textured




CBE
Chocolate
Brown
Textured



CPE
Clay Pink
Textured



DBE
Dynamic Blue
Textured



GGE
Grass Green
Textured



HGE
Hunter Green
Textured



LNE
Lunar Gray
Textured



NBE
Navy Blue
Textured



SBE
Sand Beige
Textured



SGE
Sage Gray
Textured



STE
Summer Teal
Textured

SCOUT ORB 404X-ORB

3 MOUNTING OPTIONS
Pendant version designed with a single black or white cable, easy to install and adjust on site. Thin and discreet magnetic canopy. Also available as ceiling and wall mount.

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV). Integrated LED driver (404x-10 et 404x-18). Deep junction box (3983) included (404x-6).

6 FORMATS & 16 FINISHES
Machined aluminium cylindrical structure, offered in textured black, white, light gray, navy blue or pale green finish.

SOLID DOME DIFFUSER
Acrylic translucent diffuser adds a touch of roundness to catch the eye.

4048-6 4049-6 4048-10 4049-10 4048-18 4049-18

6,25" 159mm 10,5" 267mm 18" 457mm

Ø2,75" Ø70mm Ø4,5" Ø114mm Ø2,75" Ø70mm Ø4,5" Ø114mm Ø2,75" Ø70mm Ø4,5" Ø114mm

— 4048-ORB-10

SCOUT EXTRA - ACCESSORY FAMILY


ORB 404X-ORB, PEBBLE 404X-PEB, BELL 404X-BEL, FLARE 404X-FLA

PRODUCT SPECIFICATIONX	X48-XX		XX48-XXX		X49-XX		XX49-XXX		X49-XX	
PERFORMANCE	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.44KG / 1.63KG / 1.96KG		1.44KG / 1.63KG / 1.96KG		1.87KG / 2.24KG / 2.75KG		1.87KG / 2.24KG / 2.75KG		1.87KG / 2.24KG / 2.75KG	
	3.16LBS/ 3.58LBS/ 4.32LBS		3.16LBS/ 3.58LBS/ 4.32LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS	
L70 (LUMEN MAINTENANCE)	> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION



404X-ORB

5 years warranty

Visit our website for warranty terms and conditions.

TECHNICAL DATA