

SCOUT PEBBLE PENDANT 4048/4049-PEB

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH



MOUNTING OPTIONS OPTIONS DE MONTAGE

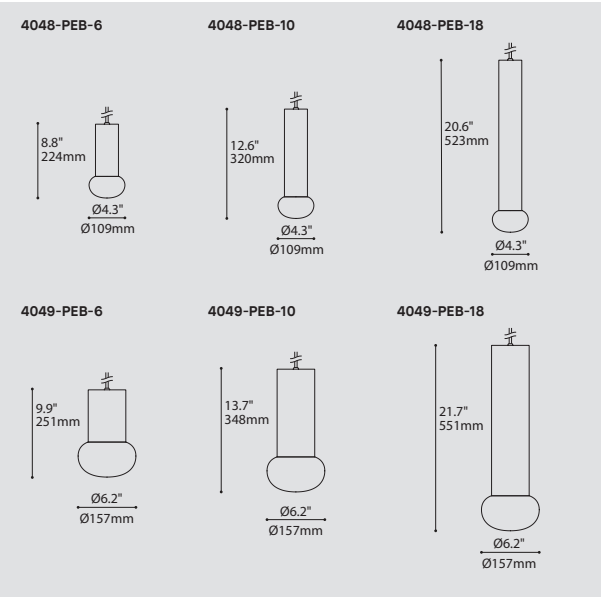

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		
4048-PEB-6	SCOUT 02.75 - 6"	
4048-PEB-10	SCOUT 02.75 - 10"	
4048-PEB-18	SCOUT 02.75 - 18"	
4049-PEB-6	SCOUT 04.5 - 6"	
4049-PEB-10	SCOUT 04.5 - 10"	
4049-PEB-18	SCOUT 04.5 - 18"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DP*	PHASE DIMMING (120V ONLY)	
DV	0-10V DIMMING (120V-277V)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* REQUIRES RC2 CANOPY		
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY BATTERIE D'URGENCE		
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION		
STEM OR CABLE TIGE OU CABLE		
S10	3/8" (10MM) STEM, NOT FIELD ADJUSTABLE	
C*	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
C2**	AIRCRAFT SUSPENSION WITH BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
*FOR 4048-FLA CONFIGURATIONS ONLY		
**FOR 4049-FLA CONFIGURATIONS ONLY		
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE		
36	36" CABLE (STD LENGTH)	
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE OR STEM LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1*	SCREWLESS 0.5" CANOPY (2471C)	
RC2	NLIGHT SCREWLESS CANOPY Y 07.75" X 1.30" (2474H)	
* 3983 ACCESSORY PROVIDED FOR 4048-PEB-6 AND 4049-PEB-6 WITH 2471C CANOPY		
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
MATCH*	COLOR MATCH WITH TUBE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
POWER CORD OR STEM FINISH FINI CABLE ALIMENTATION OU TIGE		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
BLKE	BLACK STM	
WHE	WHITE STEM	
MATCH*	COLOR MATCH WITH TUBE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
TUBE FINISH FINI TUBE		
BLKE	BLACK	CBE* CHOCOLATE BROWN NBE* NAVY BLUE
WHE	WHITE	CPE* CLAY PINK SBE* SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE* DYNAMIC BLUE SGE* SAGE GREY
SIM*	SILVER METALLIC	GGE* GRASS GREEN STE* SUMMER TEAL
AYE*	APRICOT YELLOW	HGE* HUNTER GREEN
BRE*	BRICK RED	LNE* LUNAR GREY
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR 4048-PEB-6 AND 4049-PEB-6 WITH CANOPY)	
ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

SCOUT - FINISH OPTIONS / OPTIONS DE FINIS Standard



BLKE
Black Textured



WHE
White Textured

Metallic



CHM
Champagne



SIM
Silver


Premium



AYE
Apricot
Yellow
Textured



BRE
Brick Red
Textured




CBE
Chocolate
Brown
Textured



CPE
Clay Pink
Textured



DBE
Dynamic Blue
Textured



GGE
Grass Green
Textured



HGE
Hunter Green
Textured



LNE
Lunar Gray
Textured



NBE
Navy Blue
Textured



SBE
Sand Beige
Textured




SGE
Sage Gray
Textured




STE
Summer Teal
Textured

SCOUT PEBBLE 404X-PEB

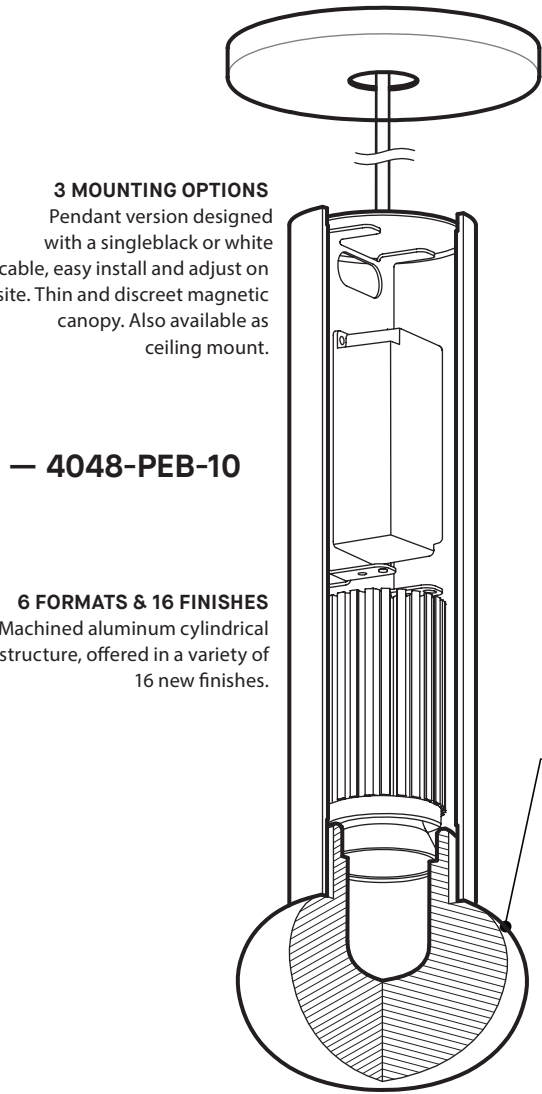


— 4048-PEB-10

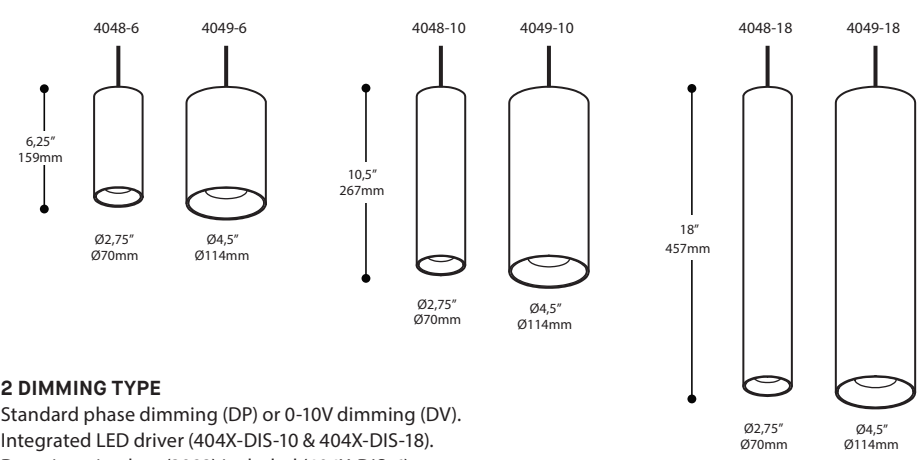

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV).
Integrated LED driver (404X-DIS-10 & 404X-DIS-18).
Deep junction box (3983) included (404X-DIS-6).

2 OUTPUTS & 4 CCTs
Extruded aluminum heatsink designed to efficiently offer regular and high output.

SCOUT EXTRA - ACCESSORY FAMILY

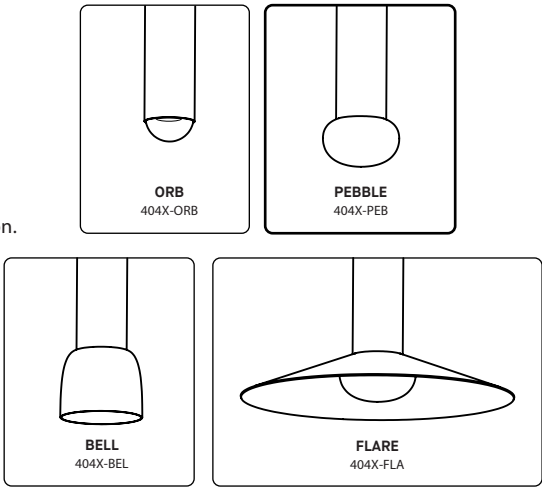


PRODUCT SPECIFICATIONX	X48-XX		XX48-XXX		X49-XX		XX49-XXX		X49-XX	
PERFORMANCE	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.44KG / 1.63KG / 1.96KG 3.16LBS/ 3.58LBS/ 4.32LBS		1.44KG / 1.63KG / 1.96KG 3.16LBS/ 3.58LBS/ 4.32LBS		1.87KG / 2.24KG / 2.75KG 4.12LBS/ 4.92LBS/ 6.05LBS		1.87KG / 2.24KG / 2.75KG 4.12LBS/ 4.92LBS/ 6.05LBS		1.87KG / 2.24KG / 2.75KG 4.12LBS/ 4.92LBS/ 6.05LBS	
L70 (LUMEN MAINTENANCE)	> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION



404X-PEB

