

SILENE CLASSIC 4156B-JMJ

PROJECTPROJET

SPEC TYPE

NOTES



OVERALL HEIGHTHAUTEUR HORS TOUT


LIGHT SOURCE	LED	LED DIM
MOUNTING	2401E	2403G
CABLE	73.20"	73.95"
STEM	47.60"	48.35"

MOUNTING OPTIONSOPTIONS DE MONTAGE

2401E Ø4.50" x 1.00" Ø114 x 25mm	2403G Ø4.50" x 1.75" Ø114 x 44mm

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm		CABLE STD 60" 1523mm	
--------------------------	--	----------------------------	--

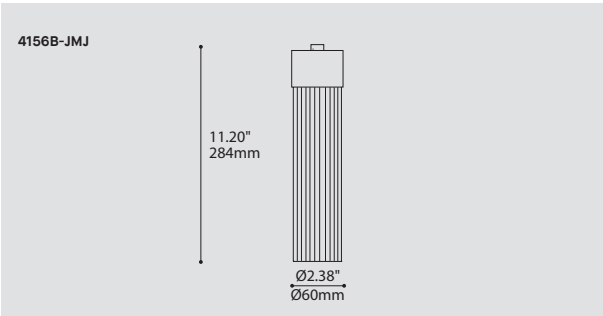

ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODELMODÈLE		4156B-JMJ
4156B-JMJ	SILENE CLASSIC	
LIGHT SOURCESOURCE LUMINEUSE		LED.4
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
LED.4	4W, LED	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTIONOPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
STEM OR CABLETIGE OU CABLE		
S6	1/4" (6MM) STEM, FIELD ADJUSTABLE	
C	CLEAR CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTHLONGUEUR DE TIGE OU CABLE		
36	36" STEM (STD LENGTH)	
60	60" CABLE (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTINGMONTAGE		
RC	ROUND CANOPY / PAVILLON ROND FOR LED: 1.00" CANOPY (2401E) FOR DIMMING LED: 1.75" CANOPY (2403G)	
MOUNTING OPTIONOPTION DE MONTAGE		
SCA*	SLOPE CEILING ADAPTOR / ADAPTATEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM	
STRUCTURE FINISHFINI STRUCTURE		
CHR	CHROME	
S C	SATIN CHROME	
CANOPY FINISHFINI PAVILLON ^(B)		
WH	WHITE	
^(B) IF NO FINISH IS SELECTED, CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH		
DIFFUSER FINISHFINI DIFFUSEUR		CLR
CLR	CLEAR	

