

KIZIS 4164-NFM

PROJECTPROJET

SPEC TYPE

NOTES



OPTIONS



LED



CLR

FAMILYFAMILLE



4424-NFM

OVERALL HEIGHTHAUTEUR HORS TOUT


LIGHT SOURCE	LED	LED DIM -8W 277V
MOUNTING	2401E	2403G
CABLE	74.15"	74.65"

MOUNTING OPTIONSOPTIONS DE MONTAGE

2401E Ø4.50" x 1.00" Ø114 x 25mm	2403G Ø4.50" x 1.50" Ø114 x 38mm
--	--

STEM OR CABLE OPTIONSOPTIONS DE TIGE OU CABLE

3 x AC CABLE (ANGLED) STD 60" 1523mm	
---	--

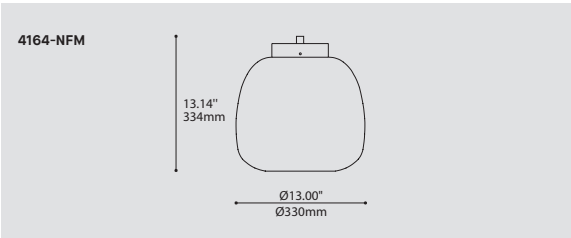


ORDERING SPECIFICATIONSPÉCIFICATION DE COMMANDE		CODE
MODELMODÈLE		4164-NFM
4164-NFM	KIZIS	
LIGHT SOURCESOURCE LUMINEUSE		LED.8
(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)		
LED.8	8W, LED	
COLOR TEMPERATURETEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI)INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGEVOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTIONOPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
CABLECABLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTHLONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTINGMONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND FOR LED : 1.00" CANOPY (2401E) FOR DIMMING LED & 8W 277V: 1.75" CANOPY (2403G)	
STRUCTURE FINISHFINI STRUCTURE		
CHR	CHROME	
S C	SATIN CHROME	
CANOPY FINISHFINI PAVILLON		
WHE*	WHITE FINE TEXTURE *IF NO FINISH IS SELECTED, CANOPY FINISH WILL BE THE SAME AS STRUCTURE FINISH	
DIFFUSER FINISHFINI DIFFUSEUR		
TCHR	TRANSLUCENT CHROME	
CLR	CLEAR	


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM
- DIM
- IES
- LED

DESIGN:	Pendant with soft and contemporary shaped hand blown glass.
INSTALLATION:	Easy to install and adjust, aircraft cable mounting.
LIGHT SOURCE:	LED light source.
STRUCTURE:	Die-formed steel canopy with machined fittings. Available in chrome or satin chrome finishes.
DIFFUSER:	Translucent chrome or clear blown glass.
CERTIFIED:	c-CSA-us
CONCEPTION:	Suspension en verre aux courbes douces et contemporaines.
INSTALLATION:	Facile à installer et à ajuster sur câbles d'acier.
SOURCE LUMINEUSE:	Source lumineuse DEL..
STRUCTURE:	Pavillon d'acier embouti et usiné. Offert en fini chromé ou chrome satiné.
DIFFUSEUR:	Verre soufflé chrome translucide ou clair.
CERTIFIÉ:	c-CSA-us

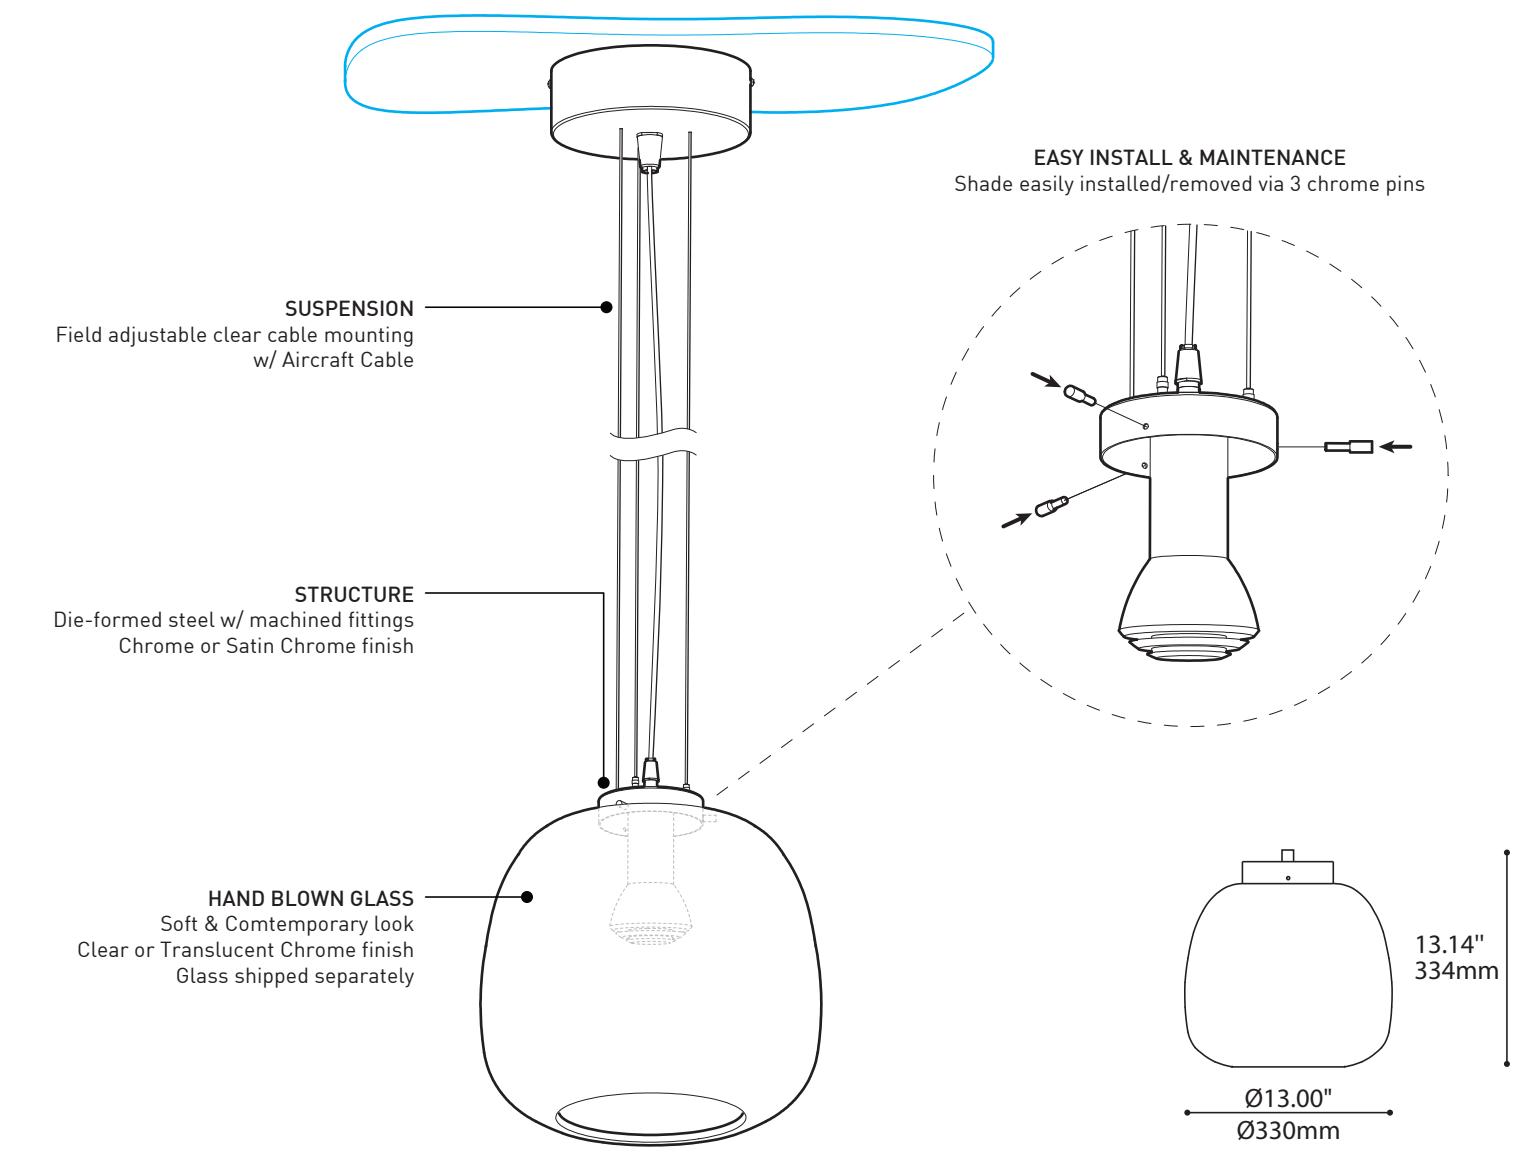

SPECIFICATIONS	
LIGHT SOURCE	4 x Nichia - 8.4w total
MODULE	UL recognized - made in USA
LUMENS (ESTIMATED)	500 lm (4000K)
CRI	85 CRI (typical)
STRUCTURE	Die-formed steel w/ machined fittings and 3 chrome pins
SHADE	Mouth blown clear crystal glass w/ translucent chrome plating
HEATSINK	Custom designed clear anodized CNC machined aluminium - L70 estimated 50 000hrs
OPTICS	LEDIL TIR - 48° total beam angle
VOLTAGE	120V or 120-277V
DRIVER / BALLAST	700 mA (120-277V)
DIMMING DV	700 mA 0-10V Dimming (120-277V)
DIMMING DP	700 mA Phase Dimming (120V)
LM-79	On request
WARRANTY	5 years

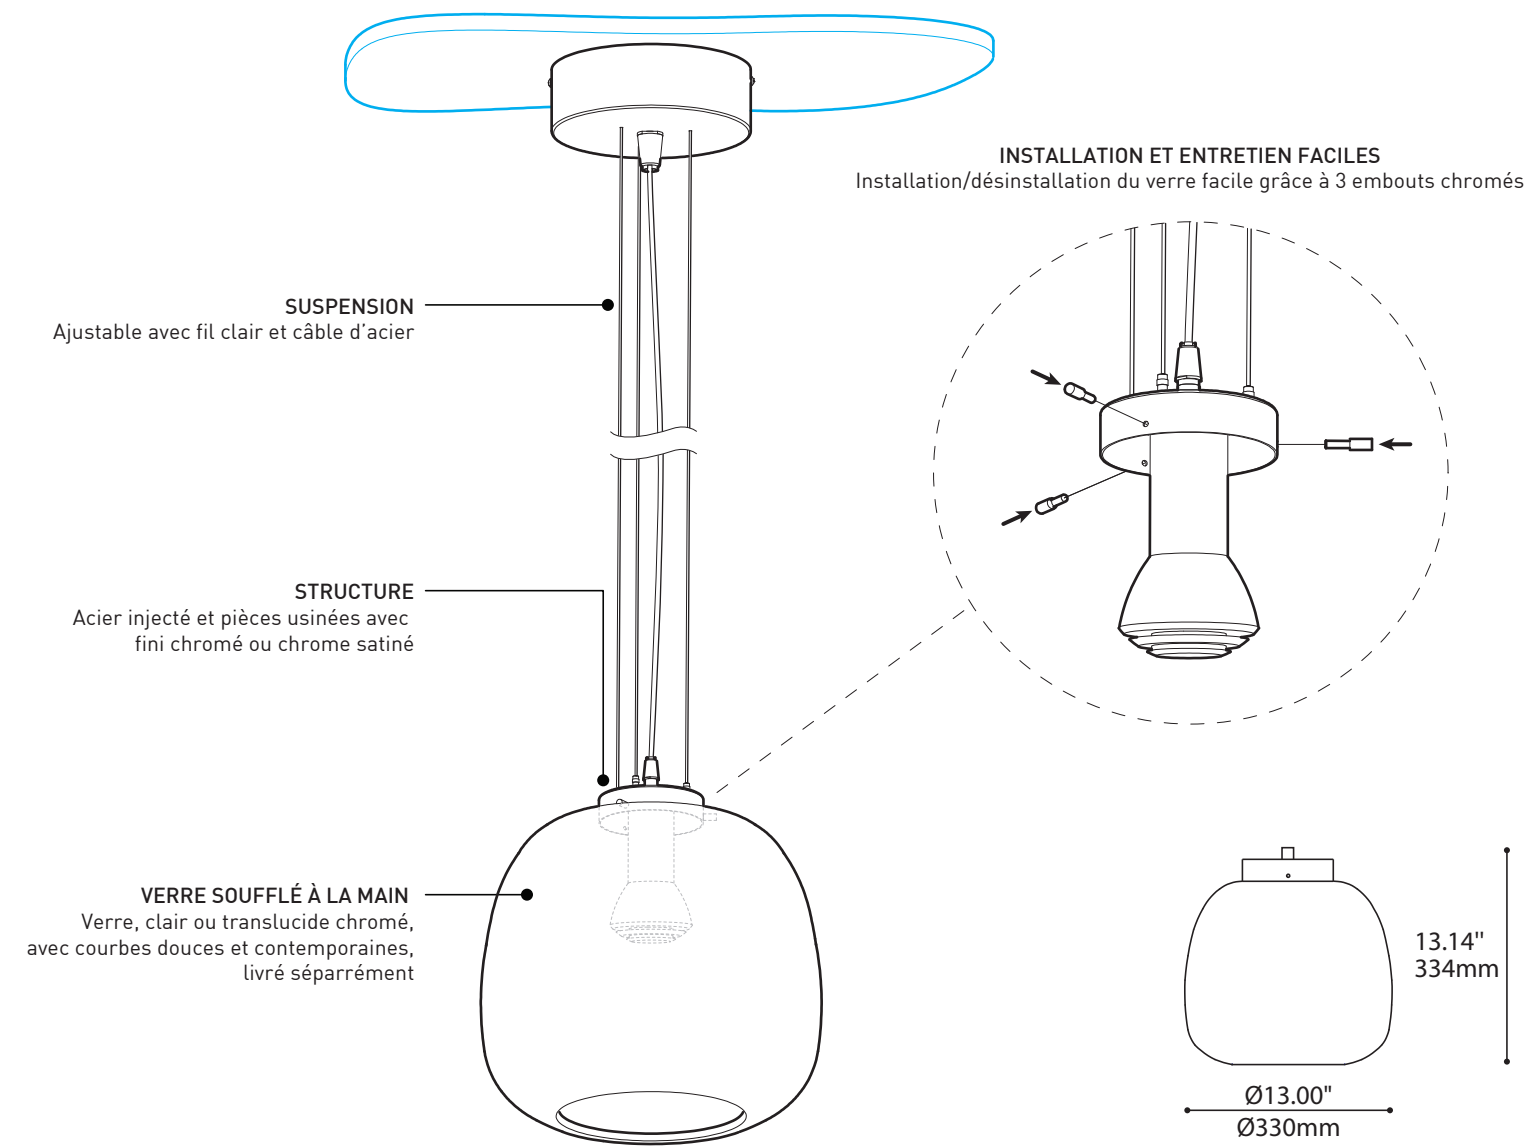

SPECIFICATIONS	
SOURCE LUMINEUSE	LED
MODULE	4 x Nichia - total 8.4w
LUMENS (ESTIMÉ)	Reconnu par UL - Fabriqué aux USA
IRC	500 lm (4000K)
STRUCTURE	85 IRC (typique)
ABAT-JOUR	Acier injecté avec pièces usinées et embouts chromés
RADIATEUR	Verre crystal, clair ou translucide chromé, soufflé à la main
OPTIQUES	Forme personnalisée en aluminium anodisé et usiné par contrôle numérique - L70 estimé 50 000hrs
VOLTAGE	LEDIL TIR - 48° d'angle de faisceau
PILOTE/ BALLAST	120V ou 120-277V
GRADATION DV	700 mA (120-277V)
GRADATION DP	700mA 0-10V Dimming (120-277V)
LM-79	700mA Phase Dimming (120V)
GARANTIE	Sur demande
	5 ans