

MONK 4175


PROJECT PROJÉT

SPEC TYPE

NOTES




FAMILY FAMILLE

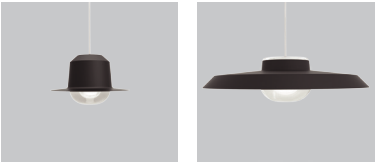

4176

4177

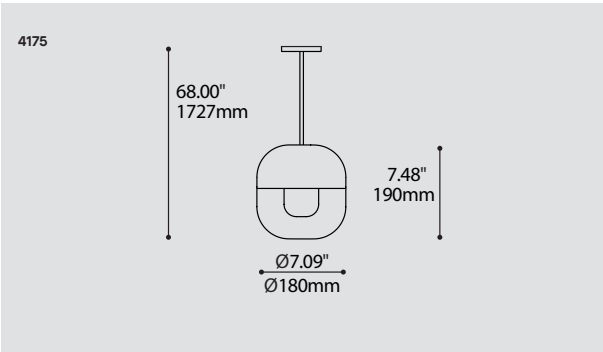


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4175
4175	MONK	
LIGHT SOURCE SOURCE LUMINEUSE		LED.13
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.13	13W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
CABLE CABLE		C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CANOPY FINISH FINI PAVILLON		
ANTE	ANTHRACITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR		
ANTE	ANTHRACITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		CLR
CLR	CLEAR	

DESIGN: High luxury in a modest package. The handmade crystal core is balanced with a flush fitting shade in a variety of insightful finishes. Humbly luminous on its own, or arranged in numbers.

INSTALLATION: Single 5-wire power cable with integrated aircraft cable and dual strain relief. Easy on-site height adjustment and magnetic easy-installation canopy.

LIGHT SOURCE: A 13W custom LED light engine supplied with an on board 0-10V or phase dimming driver.

DIFFUSER: A spherical polycarbonate diffuser smoothly distributes the light source, which is then refracted through the high clarity crystal structure.

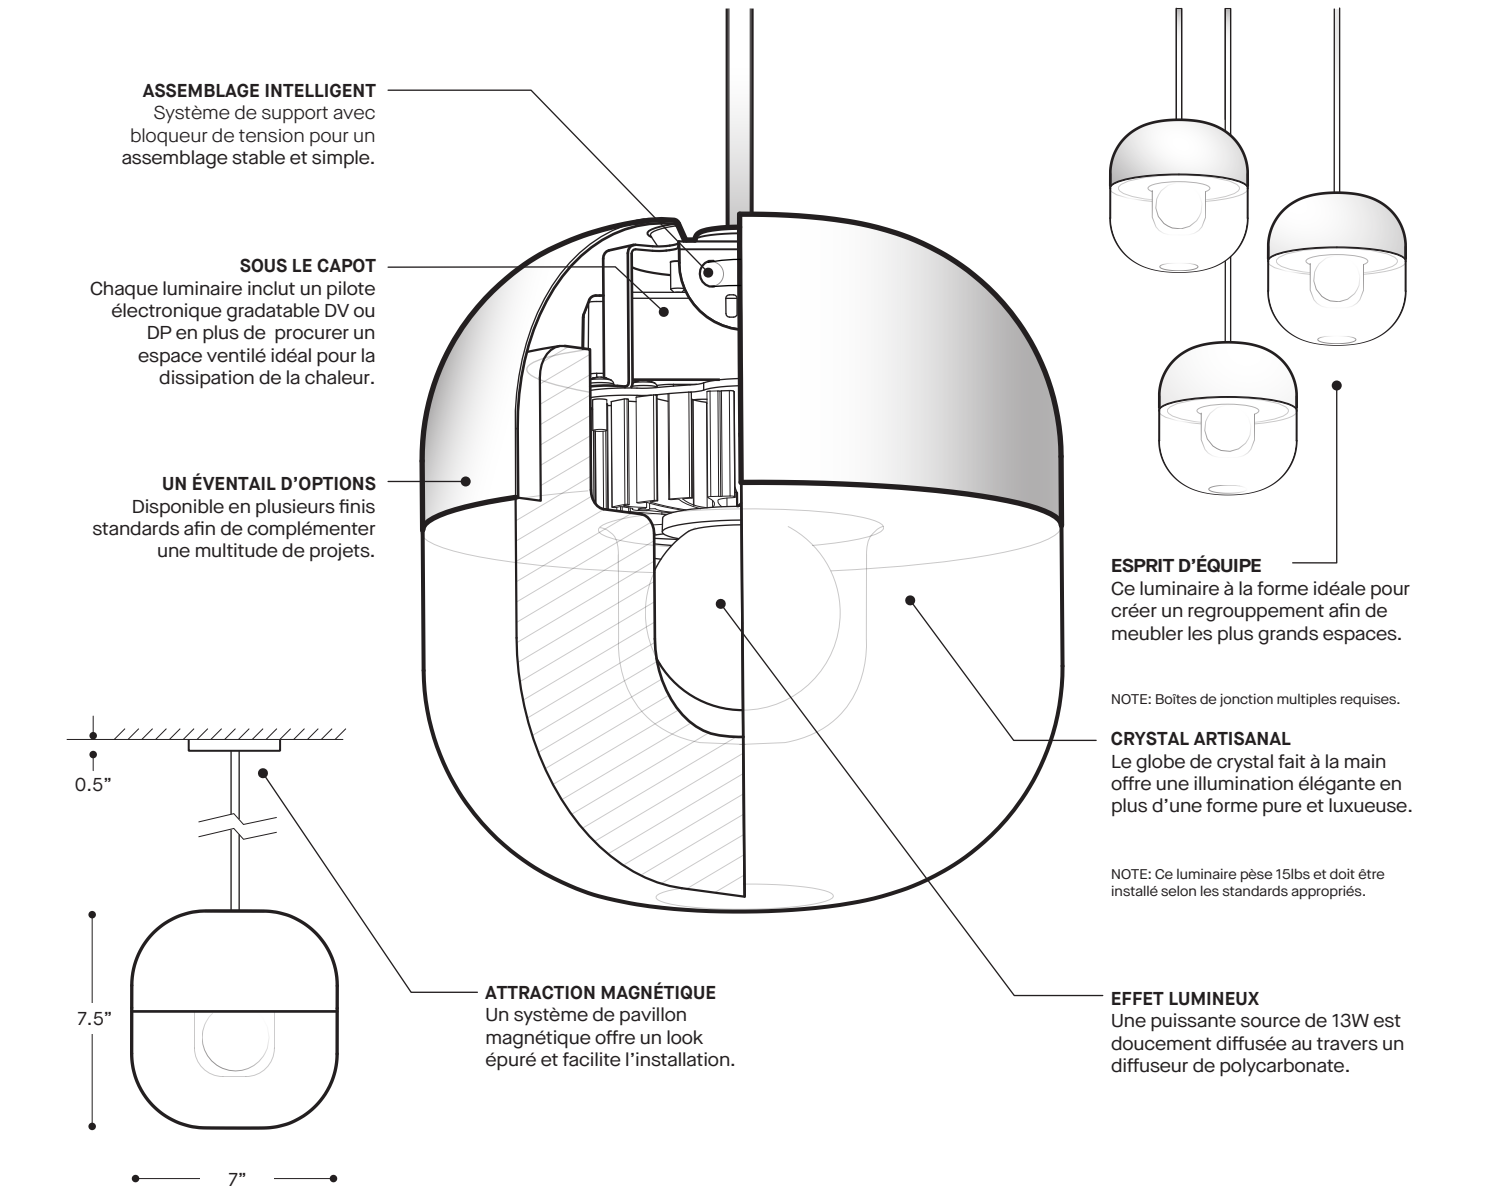


SPÉCIFICATION PRODUIT 4175-ANTE

PERFORMANCE	
PUISSANCE TOTALE	13 W
LUMENS RÉELS (4000K)	968 LM
EFFICACITÉ	74 LM/W
AUTRES INFORMATION	
POIDS DU LUMINAIRE	15 LBS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80


DISTRIBUTION LUMINEUSE



4175-ANTE



Visitez notre site Web pour les termes et conditions.

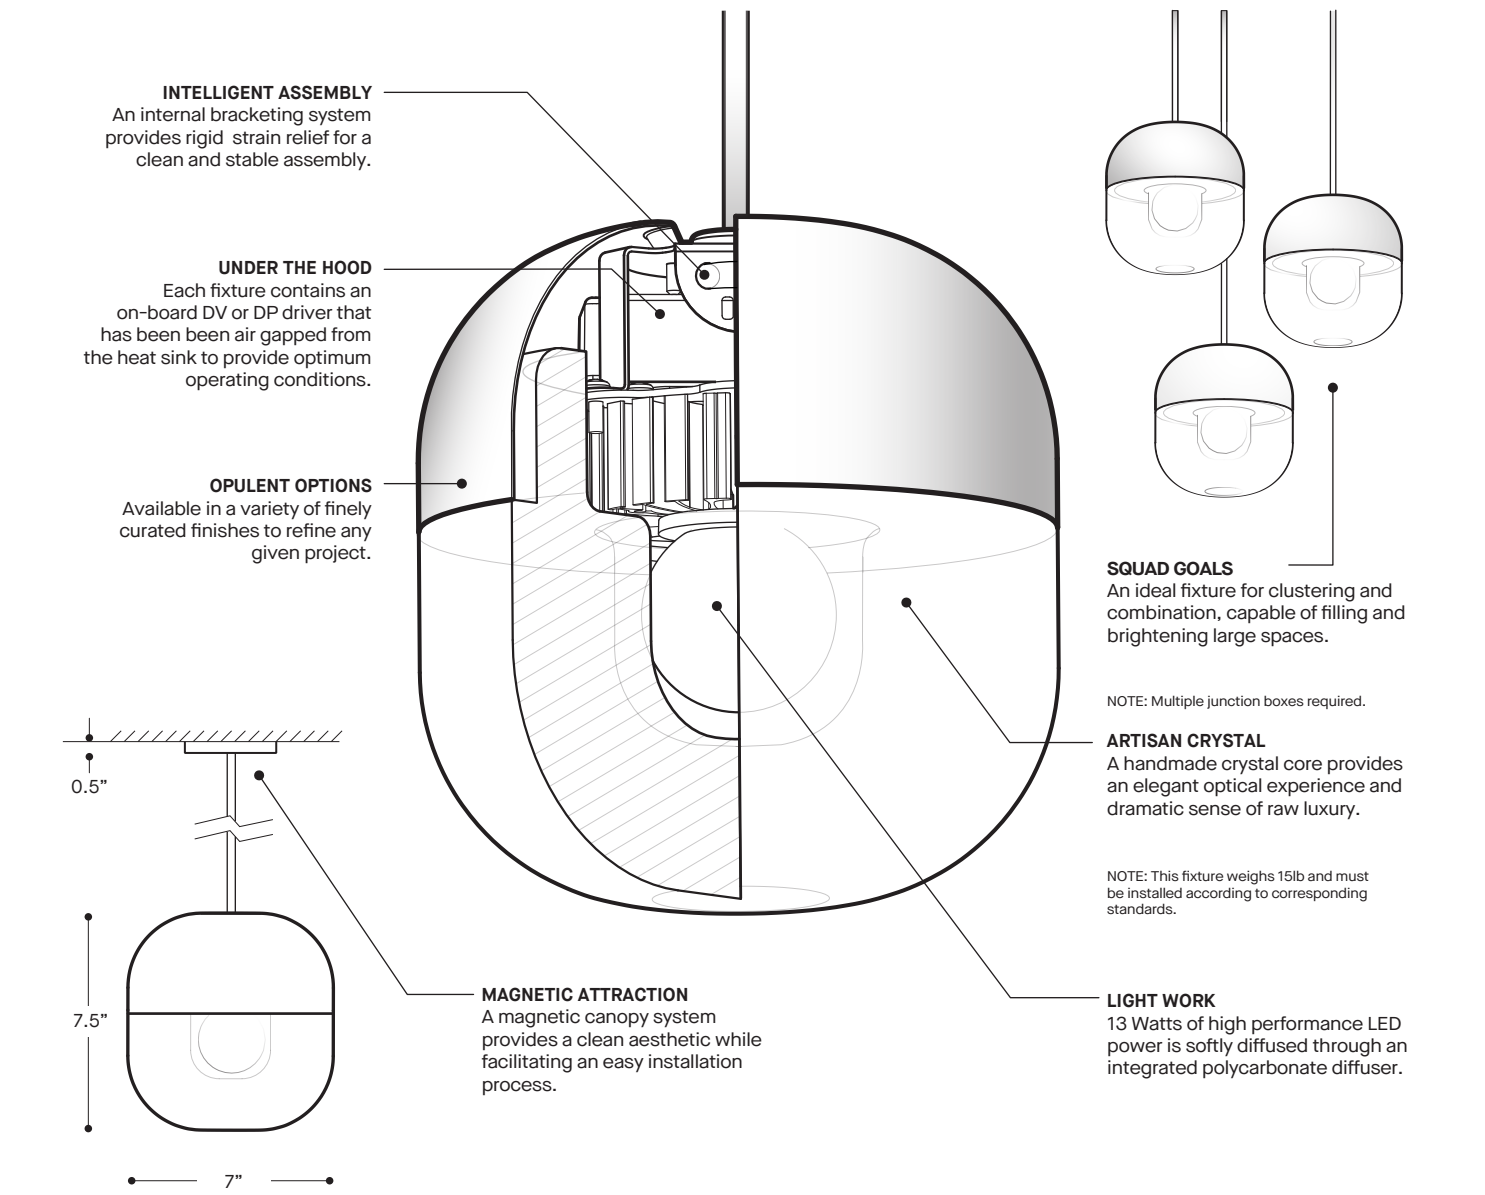


PRODUCT SPECIFICATION 4175-ANTE

PERFORMANCE	
SYSTEM WATTAGE	13 W
DELIVERED LUMENS (4000K)	968 LM
EFFICACY	74 LM/W
OTHER INFORMATION	
LUMINAIRE'S WEIGHT	15 LBS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

LIGHT DISTRIBUTION





Visit our website for warranty terms and conditions.