

DUKE 4176


PROJECT PROJÉT

SPEC TYPE

NOTES




FAMILY FAMILLE

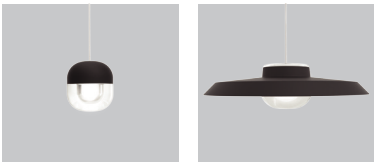


4175

4177

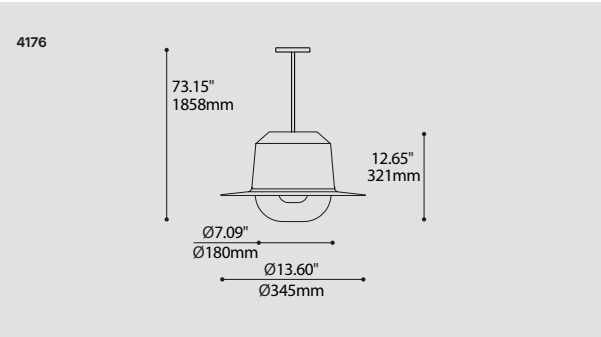

| ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE                                  |                                      | CODE   |
|-----------------------------------------------------------------------------------|--------------------------------------|--------|
| MODEL MODÈLE                                                                      |                                      | 4176   |
| 4176                                                                              | DUKE                                 |        |
| LIGHT SOURCE SOURCE LUMINEUSE                                                     |                                      | LED.13 |
| (WATTAGE, LAMP TYPE, OTHER INFO)                                                  |                                      |        |
| LED.13                                                                            | 13W, LED                             |        |
| COLOR TEMPERATURE TEMPÉRATURE DE COULEUR                                          |                                      |        |
| 30                                                                                | 3000K                                |        |
| 35                                                                                | 3500K                                |        |
| 40                                                                                | 4000K                                |        |
| VOLTAGE VOLTAGE                                                                   |                                      |        |
| 120V                                                                              | 120 VOLT                             |        |
| 277V                                                                              | 277 VOLT                             |        |
| DIMMING OPTION OPTION DE GRADATION                                                |                                      |        |
| DV                                                                                | 0-10V DIMMING (120-277V)             |        |
| DP                                                                                | PHASE DIMMING (120V ONLY)            |        |
| LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE. |                                      |        |
| CABLE CABLE                                                                       |                                      | C      |
| C                                                                                 | CLEAR CABLE, FIELD ADJUSTABLE        |        |
| CABLE LENGTH LONGUEUR DE CABLE                                                    |                                      |        |
| 60                                                                                | 60" CABLE (STD LENGTH)               |        |
| **                                                                                | CUSTOM CABLE LENGTH (PLEASE SPECIFY) |        |
| FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.                     |                                      |        |
| CANOPY FINISH FINI PAVILLON                                                       |                                      |        |
| ANTE                                                                              | ANTHRACITE FINE TEXTURE              |        |
| BLKE                                                                              | BLACK FINE TEXTURE                   |        |
| WHE                                                                               | WHITE FINE TEXTURE                   |        |
| SHADE FINISH FINI ABAT-JOUR                                                       |                                      |        |
| ANTE                                                                              | ANTHRACITE FINE TEXTURE              |        |
| BLKE                                                                              | BLACK FINE TEXTURE                   |        |
| WHE                                                                               | WHITE FINE TEXTURE                   |        |
| DIFFUSER FINISH FINI DIFFUSEUR                                                    |                                      | CLR    |
| CLR                                                                               | CLEAR                                |        |

|                   |                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DESIGN:           | Subtle luxury with a touch of the cool. The handmade crystal core is fitted with an angular shade available in several opulent finishes. Stylish as a solo artist or grouped for an even more dramatic performance.                                                           |
| INSTALLATION:     | Single 5-wire power cable with integrated air craft cable and dual strain relief. Easy on-site height adjustment and magnetic easy-installation canopy.                                                                                                                       |
| LIGHT SOURCE:     | A 13W custom LED light engine is supplied with an on-board 0-10V or phase dimming driver.                                                                                                                                                                                     |
| DIFFUSER:         | A spherical polycarbonate diffuser smoothly distributes the light source, which is then refracted through the high clarity crystal structure.                                                                                                                                 |
| CONCEPTION:       | Le luxe, au goût du jour. Le globe de cristal fait à la main est ornementé par un abat-jour angulaire offert dans une variété de finis attrayants. Le Duke est aussi éblouissant par lui-même que dans un ensemble, lui donnant ainsi une allure d'autant plus spectaculaire. |
| INSTALLATION:     | Un seul câble d'alimentation à 5 brins incorporant un câble d'acier relié à deux serres câbles. Ajustement simple de la hauteur lors de l'installation et pavillon magnétique facile à installer.                                                                             |
| SOURCE LUMINEUSE: | Le luminaire Duke offre une source lumineuse DEL de 13W reliée à une unité d'alimentation permettant la gradation de types 0-10V ou phase.                                                                                                                                    |
| DIFFUSEUR:        | Une sphère de polycarbonate diffuse uniformément la projection lumineuse qui est par la suite réfractée à travers la structure extrêmement claire du cristal.                                                                                                                 |

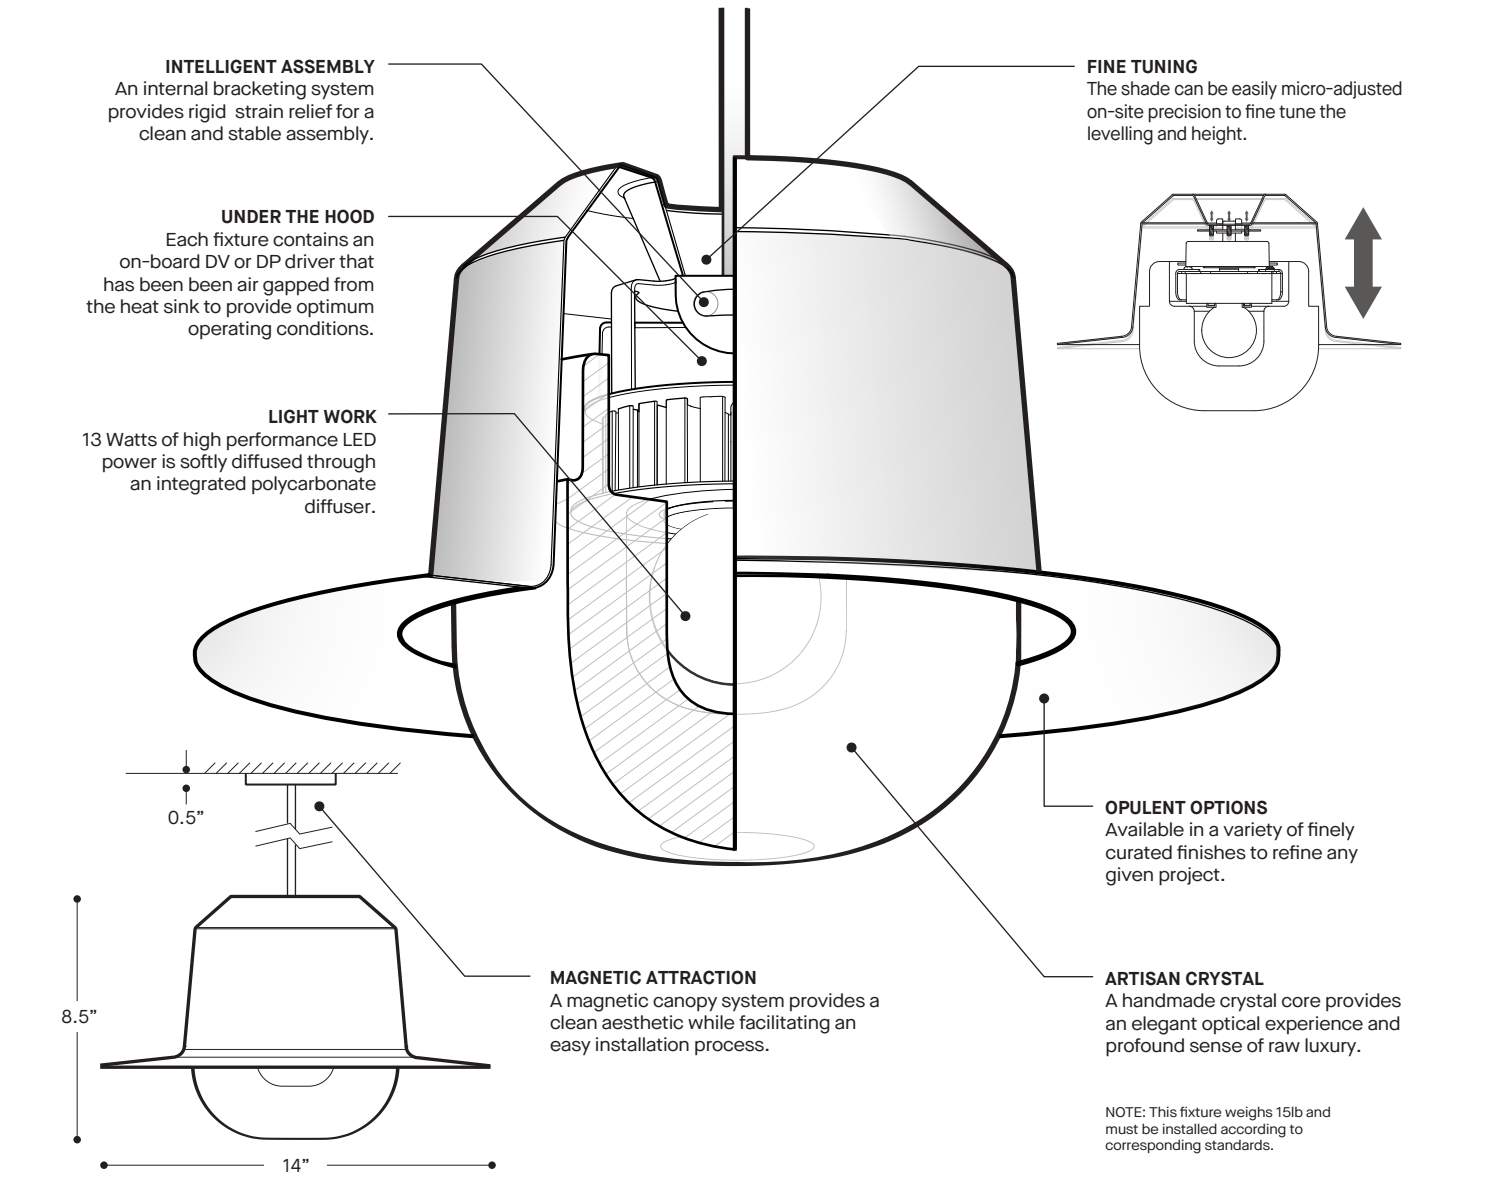


PRODUCT SPECIFICATION 4176-ANTE

| PERFORMANCE              |         |
|--------------------------|---------|
| SYSTEM WATTAGE           | 13 W    |
| DELIVERED LUMENS (4000K) | 712 LM  |
| EFFICACY                 | 55 LM/W |
| OTHER INFORMATION        |         |
| LUMINAIRE'S WEIGHT       | 15 LBS  |

EFFICACY MULTIPLIERS


| CRI | CCT   | FACTOR |
|-----|-------|--------|
| 80+ | 4000K | 1.00   |
| 80+ | 3500K | 0.99   |
| 80+ | 3000K | 0.97   |
| 80+ | 2700K | 0.94   |
| 90+ | 4000K | 0.89   |
| 90+ | 3500K | 0.86   |
| 90+ | 3000K | 0.84   |
| 90+ | 2700K | 0.80   |

LIGHT DISTRIBUTION



4176-ANTE

Visit our website for warranty terms and conditions.

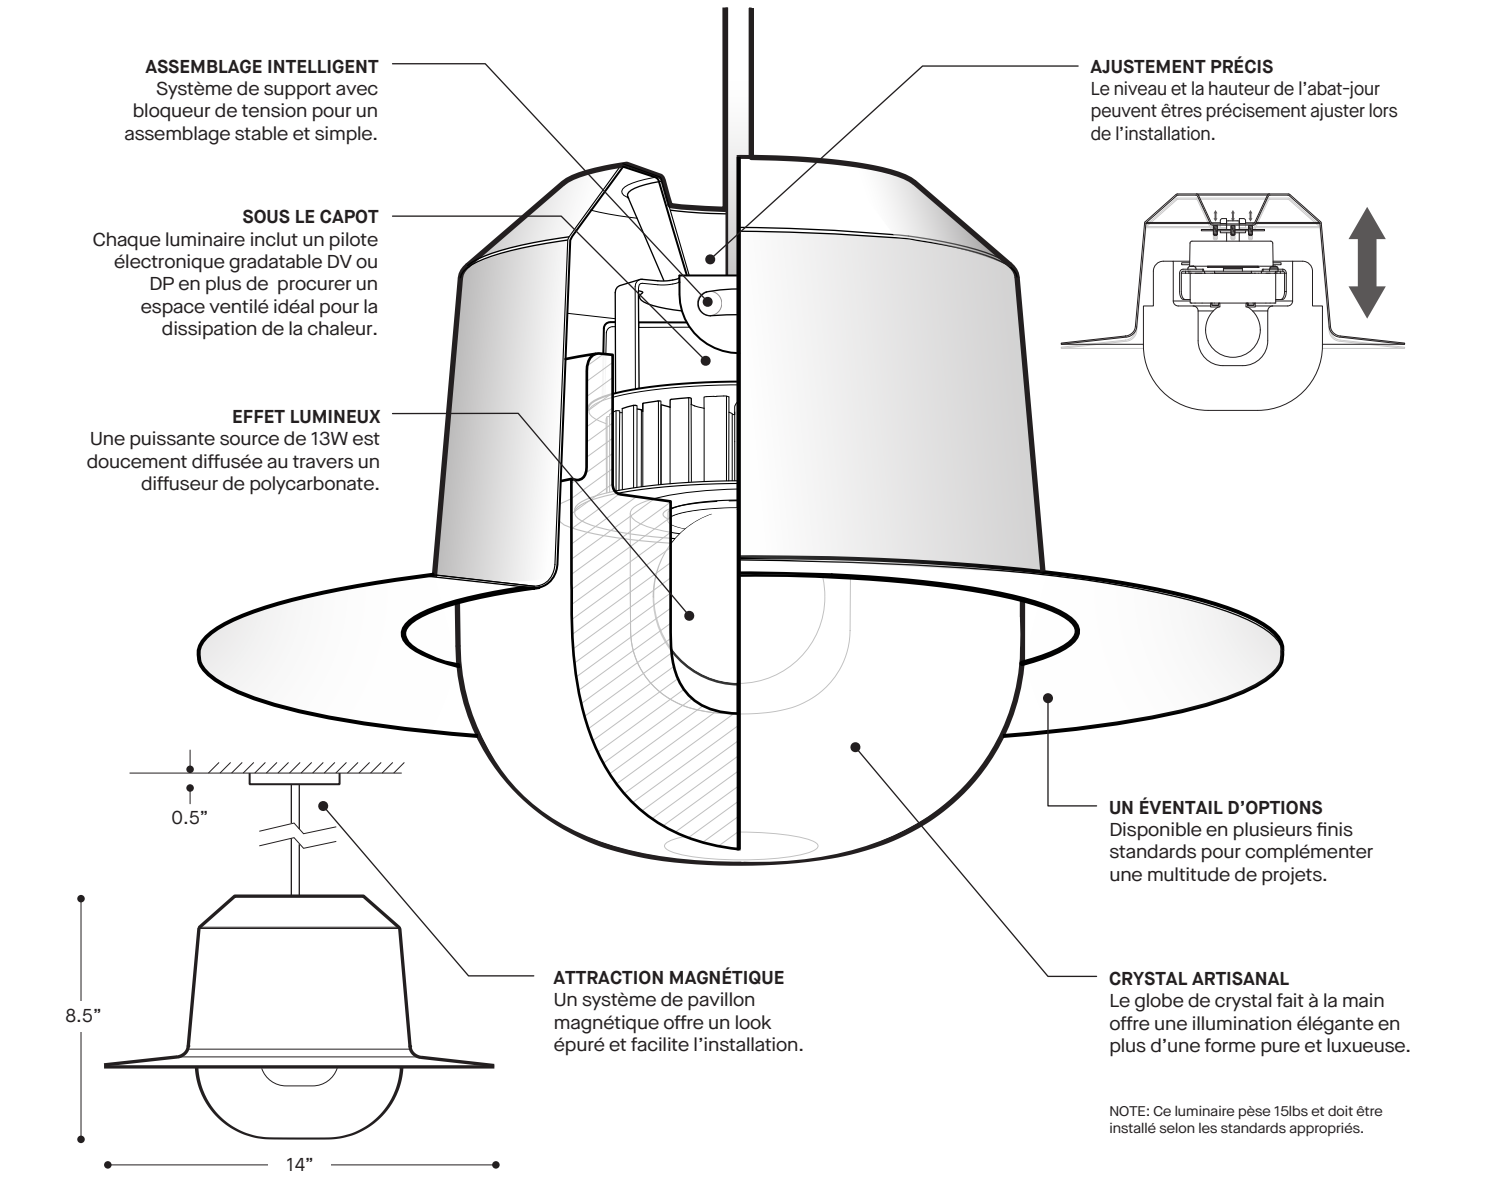


SPÉCIFICATION PRODUIT 4176-ANTE

| PERFORMANCE          |         |
|----------------------|---------|
| PUISSANCE TOTALE     | 13 W    |
| LUMENS RÉELS (4000K) | 712 LM  |
| EFFICACITÉ           | 55 LM/W |
| AUTRES INFORMATION   |         |
| POIDS DU LUMINAIRE   | 15 LBS  |

FACTEUR D'EFFICACITÉ

| IRC | CCT   | FACTEUR |
|-----|-------|---------|
| 80+ | 4000K | 1.00    |
| 80+ | 3500K | 0.99    |
| 80+ | 3000K | 0.97    |
| 80+ | 2700K | 0.94    |
| 90+ | 4000K | 0.89    |
| 90+ | 3500K | 0.86    |
| 90+ | 3000K | 0.84    |
| 90+ | 2700K | 0.80    |

DISTRIBUTION LUMINEUSE



4176-ANTE



5 ans de garantie

Visitez notre site Web pour les termes et conditions.