

COUNT 4177

PROJECT PROJÉT

SPEC TYPE

NOTES




FAMILY FAMILLE




4175

4176

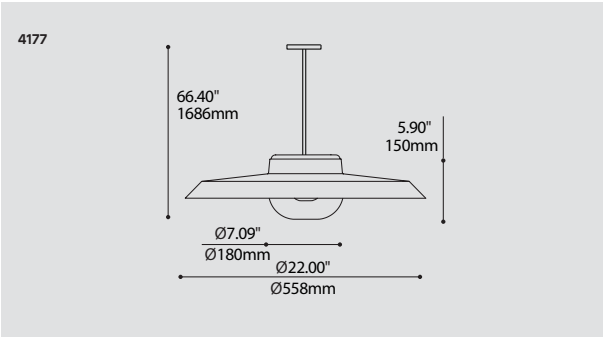

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4177
4177	COUNT	
LIGHT SOURCE SOURCE LUMINEUSE		LED.13
(WATTAGE, LAMP TYPE, OTHER INFO)		
LED.13	13W, LED	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.		
CABLE CABLE		C
C	CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
CANOPY FINISH FINI PAVILLON		
ANTE	ANTHRACITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR		
ANTE	ANTHRACITE FINE TEXTURE	
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		CLR
CLR	CLEAR	
ACCESSORY ACCESSOIRE		3983
3983	DEEP JUNCTION BOX (PROVIDED)	

DESIGN:	A regal marriage of luxury and functionality. The handmade crystal core is surrounded by a wide brimmed shade available in a variety of sophisticated finishes. The shades open top exposes the softly glowing crystal core for an understated sense of elegance.
INSTALLATION:	Single 3-wire power cable with integrated aircraft cable and dual strain relief. Magnetic easy-installation canopy.
LIGHT SOURCE:	A 13W custom LED light engine supplied with an on board 0-10V or phase dimming driver.
DIFFUSER:	A spherical polycarbonate diffuser smoothly distributes the light source, which is then refracted through the high clarity crystal structure.
CONCEPTION:	L'union parfaite entre le luxe et la fonctionnalité. Le globe de cristal fait à la main est surplombé par un vaste abat-jour offert dans une variété de finis sophistiqués. Le dessus ouvert de l'abat-jour expose le globe de cristal illuminé lui donnant ainsi un effet grandiose.
INSTALLATION:	Un seul câble d'alimentation à 3 brins incorporant un câble d'acier relié à deux serres câbles. Pavillon magnétique facile à installer.
SOURCE LUMINEUSE:	Module DEL de 13W conçu sur mesure relié à une unité d'alimentation permettant la gradation de types 0-10V ou phase.
DIFFUSEUR:	Une sphère de polycarbonate diffuse uniformément la projection lumineuse qui est par la suite réfractée à travers la structure extrêmement claire du cristal.

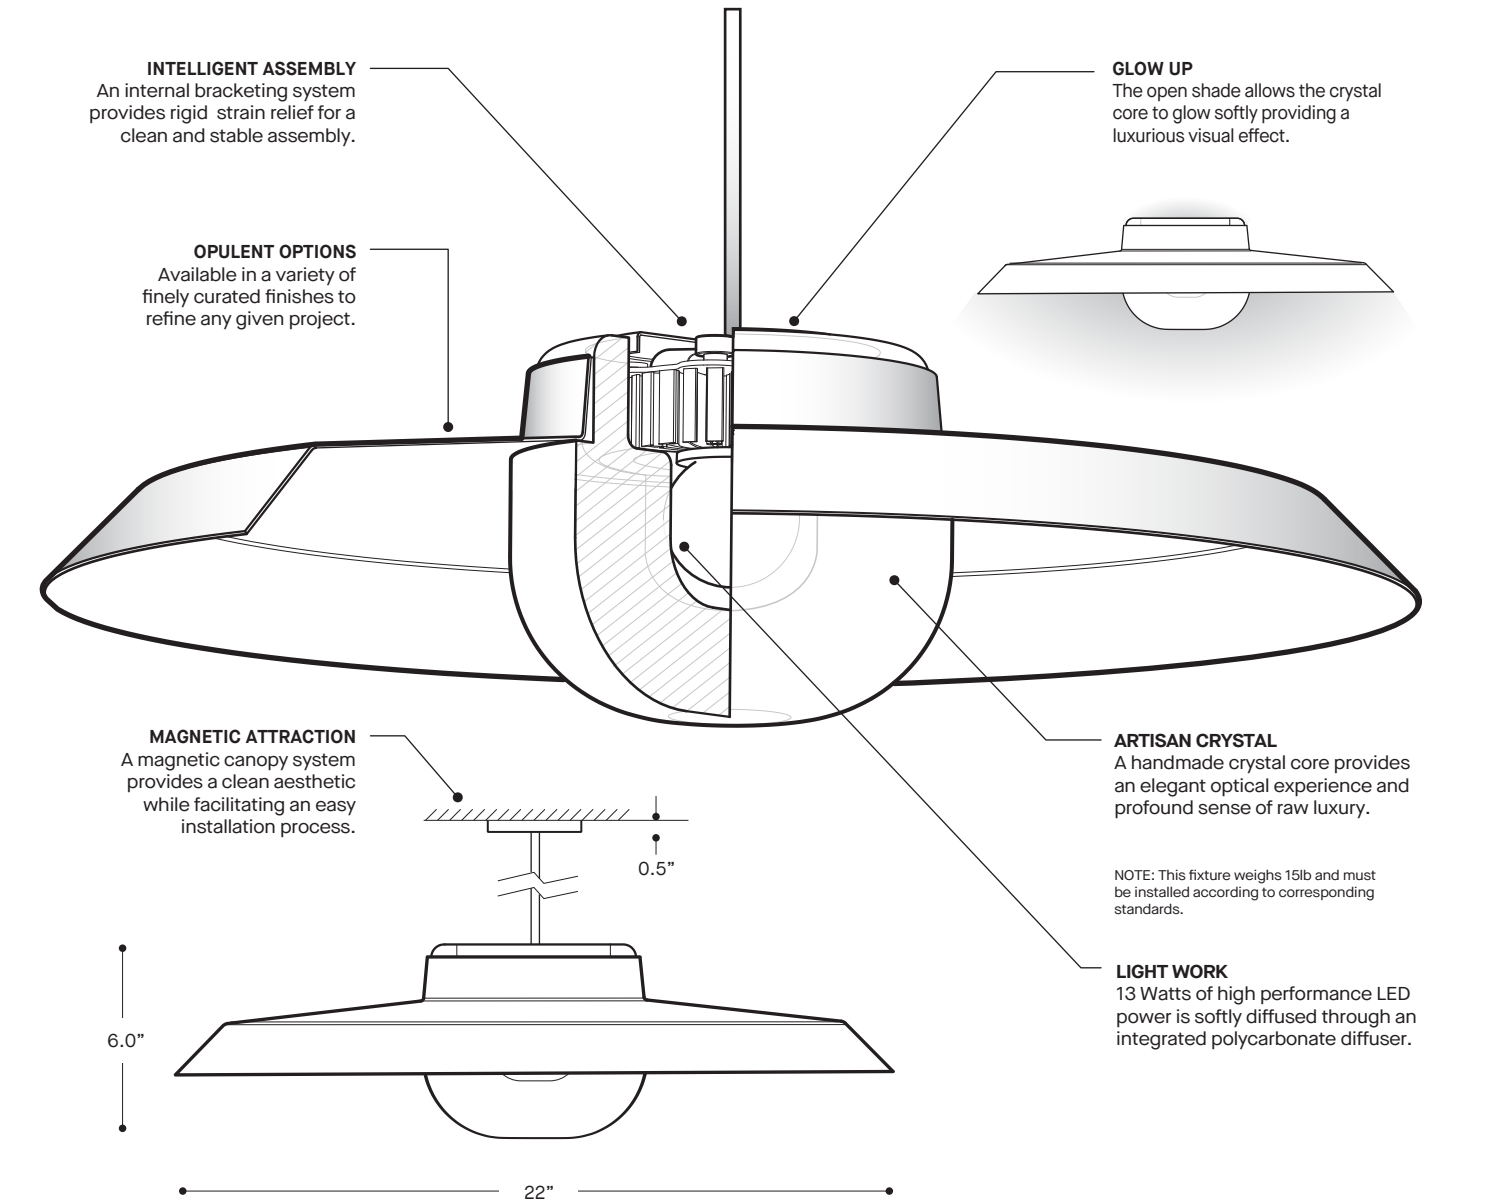


PRODUCT SPECIFICATION 4177-ANTE

PERFORMANCE	
SYSTEM WATTAGE	13 W
DELIVERED LUMENS (4000K)	793 LM
EFFICACY	61 LM/W
OTHER INFORMATION	
LUMINAIRE'S WEIGHT	15 LBS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80


LIGHT DISTRIBUTION





Visit our website for warranty terms and conditions.

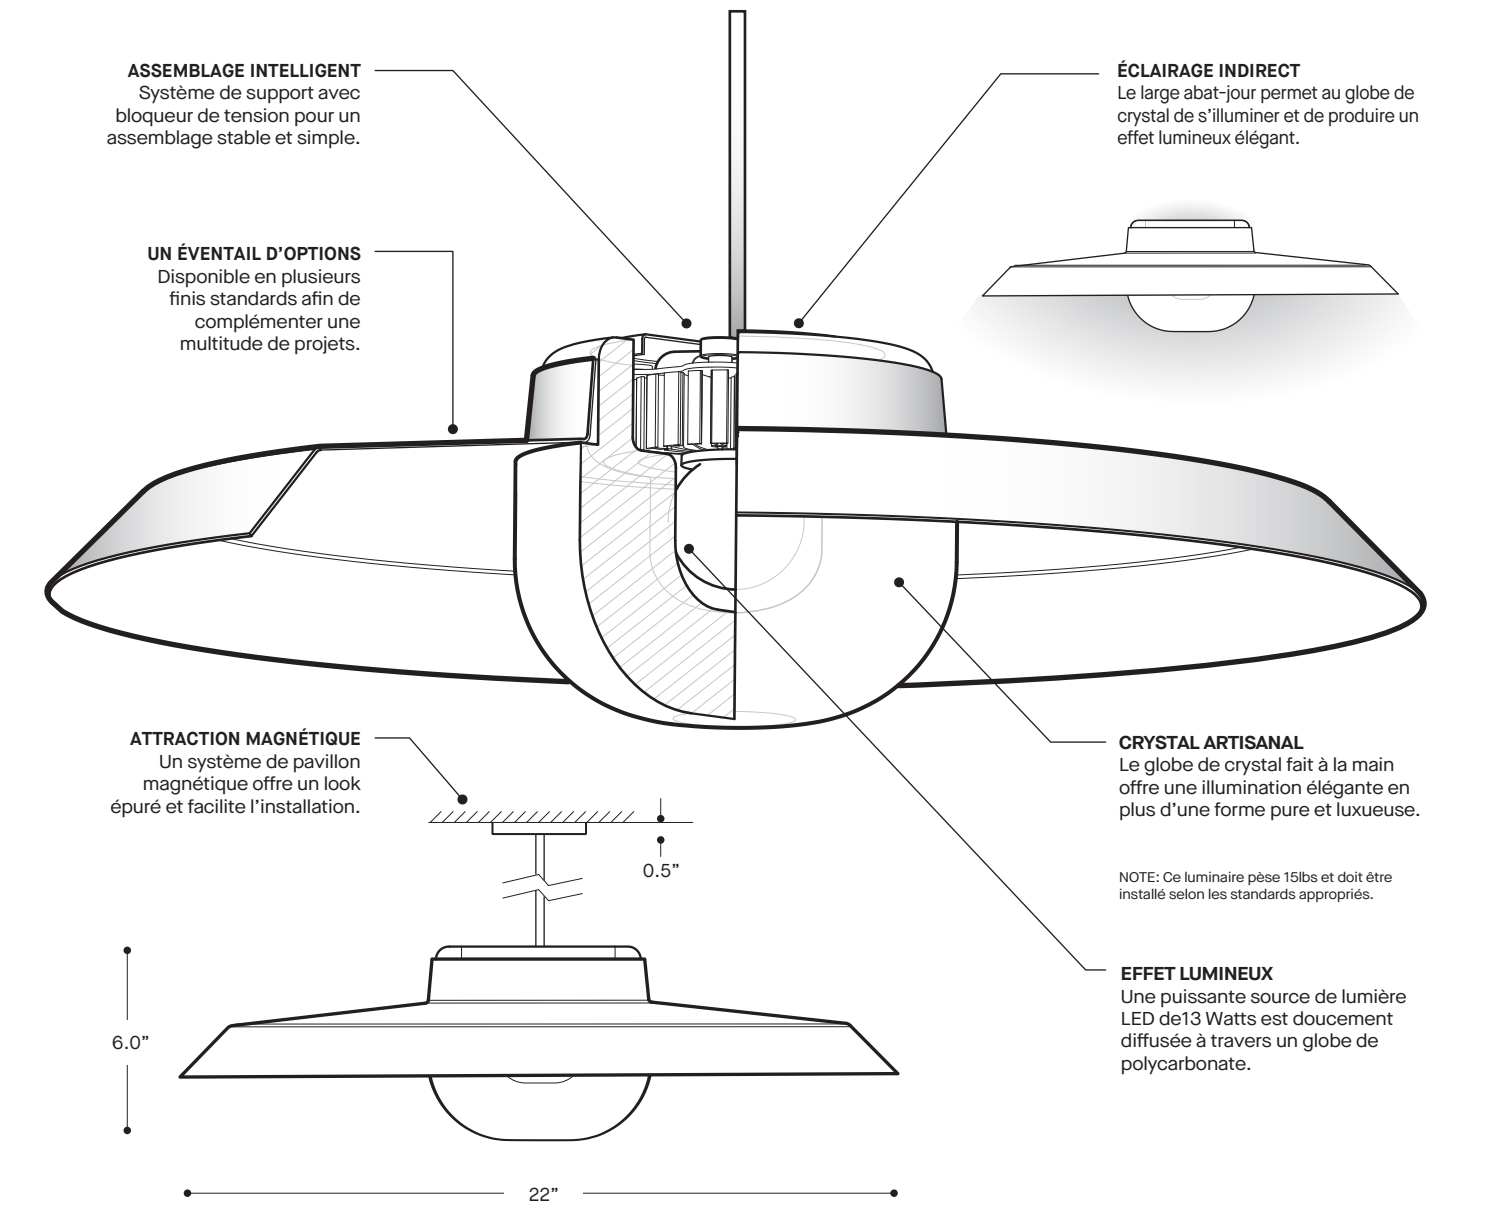


SPÉCIFICATION PRODUIT 4177-ANTE

PERFORMANCE	
PUISSANCE TOTALE	13 W
LUMENS RÉELS (4000K)	793 LM
EFFICACITÉ	61 LM/W
AUTRES INFORMATION	
POIDS DU LUMINAIRE	15 LBS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.99
80+	3000K	0.97
80+	2700K	0.94
90+	4000K	0.89
90+	3500K	0.86
90+	3000K	0.84
90+	2700K	0.80

DISTRIBUTION LUMINEUSE



4177-ANTE

Visitez notre site Web pour les termes et conditions.