

SONIC 4209-AGQ

PROJECT PROJÉT
SPEC TYPE
NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT

LIGHT SOURCE	HAL TRACK 1 CIRCUIT	INC TRACK 1 CIRCUIT	INC TRACK 2 CIRCUIT	INC HAL	CFL	CFL DIM
MOUNTING	2734	2734B	2764B	2401E	2402G	2402J
CABLE	80.80"	80.15"	80.85"	79.80"	80.55"	57.05"
STEM	56.20"	55.55"	56.15"	55.20"	56.35"	56.85"


MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734B	2764B	2401E	2402G	2402J
3.85" x 2.03"	1.46" x 1.36"	3.29" x 1.96"	04.5" x 1"	05.25" x 1.75"	05.25" x 2.25"
98 x 52mm	37 x 35mm	84 x 48mm	Ø114 x 25mm	Ø133 x 44mm	Ø133 x 57mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

STEM STD 36" 914mm	CABLE STD 60" 1523mm
--------------------------	----------------------------

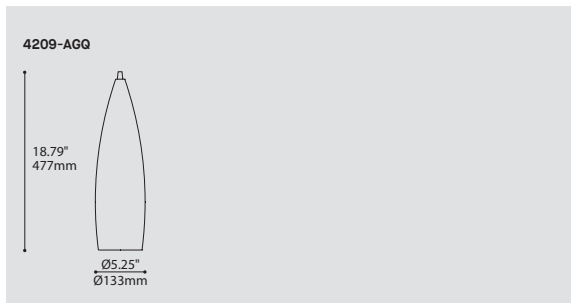

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4209-AGQ SONIC	4209-AGQ
LIGHT SOURCE SOURCE LUMINEUSE	(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO) CF.D.26* 26W, CFL, DOUBLE / TRIPLE TWIN TUBE, G24Q3 BASE BIPIN.50 50W, HAL, BIPIN, GY6.35 BASE G9.60 60W, HAL, T4, G9 BASE (120V ONLY) INC.60 60W, INC, B10 / HAL T10, MEDIUM BASE (120V ONLY) *NOT AVAILABLE WITH A TRACK ADAPTOR	
VOLTAGE VOLTAGE	120V 120 VOLT 277V* 277 VOLT 347V** 347 VOLT **NOT AVAILABLE WITH A TRACK ADAPTOR **ONLY AVAILABLE WITH CF.D.26 ONLY (NON-DIMMING BALLAST)	
DIMMING OPTION OPTION DE GRADATION	AVAILABLE WITH CF.D.26 ONLY ONLY, MAXIMUM 36" STEM / CABLE LENGTH DED LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING) DE3 LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
STEM OR CABLE TIGE OU CABLE	S6 1/4" (6MM) STEM, FIELD ADJUSTABLE (NOT AVAILABLE WITH CFL LAMPS) S10 3/8" (10MM) STEM, NOT FIELD ADJUSTABLE (FOR CFL LAMPS ONLY) C CLEAR CABLE, FIELD ADJUSTABLE	
STEM OR CABLE LENGTH LONGUEUR DE TIGE OU CABLE	36 36" STEM (STD LENGTH) 60 60" CABLE (STD LENGTH) ** CUSTOM STEM LENGTH (PLEASE SPECIFY) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE	RC ROUND CANOPY / PAVILLON ROND FOR INC, G9 & HAL: 1" CANOPY (2401E) FOR CFL: 1.75" CANOPY (2402G) FOR DIMMING CFL: 2.25" CANOPY (2402J) TA1 TRACK ADAPTOR / ADAPTEUR DE RAIL 1 CIRCUIT HAL 120/12V ADAPTOR (2734) INC & G9 120V ADAPTOR (2734B) TA2 2 CIRCUITS INC & G9 120V ADAPTOR (2764B)	
MOUNTING OPTION OPTION DE MONTAGE	SCA* SLOPE CEILING ADAPTOR / ADAPTEUR DE PLAFOND EN PENTE (ROTATION: 350°, PIVOT: 90°) *ONLY AVAILABLE WITH A STEM	
TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL ^(A)	WH WHITE BLK BLACK MG METALLIC GRAY (1 CIRCUIT ONLY) ^(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY	
STRUCTURE FINISH FINI STRUCTURE ^(B)	CHR CHROME SC SATIN CHROME ^(B) INCLUDE CANOPY FINISH IF A CANOPY IS SELECTED	
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

DESIGN:	Hand-crafted glass pendant may be mounted on track, canopy or sloped ceiling adaptor.
LIGHT SOURCE:	Compact fluorescent as well as dimmable incandescent and halogen light sources available.
STRUCTURE:	Die-formed steel canopy with machined fittings.
DIFFUSER:	White hand blown and cut triplex glass diffuser.
CERTIFIED:	c-CSA-us
CONCEPTION:	Suspension en verre de forme organique fabriquée à la main s'installant sur pavillon, système de rails ou adaptateur pour plafond en pente.
SOURCE LUMINEUSE:	Fluorescent compact ainsi qu'halogène et incandescent à intensité variable.
STRUCTURE:	Pavillon d'acier embouti et usiné.
DIFFUSEUR:	Diffuseur en verre triplex blanc soufflé et taillé à la main.
CERTIFIÉ:	c-CSA-us