


# MUTE 4258-32

PROJECT PROJÉT
SPEC TYPE
NOTES




## OPTIONS

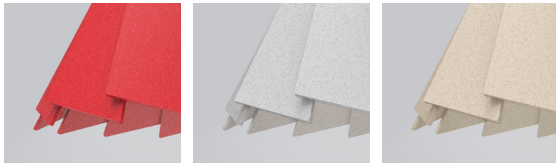

REF

SGF

BGF

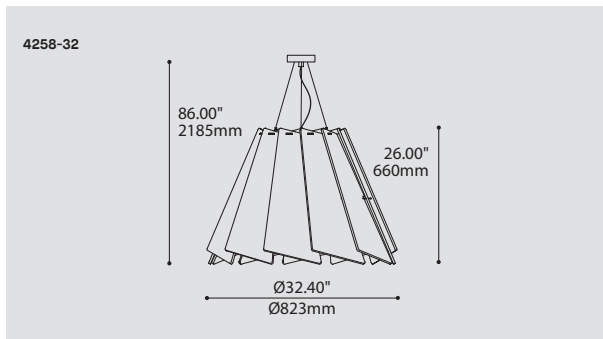


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL MODÈLE</b>	4258-32 MUTE	4258-32
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>	LED	LED
(WATTAGE, LAMP TYPE, OTHER INFO)		
<b>LED</b>	REGULAR OUTPUT	
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>		
30	3000K	
35	3500K	
40	4000K	
<b>VOLTAGE VOLTAGE</b>		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION OPTION DE GRADATION</b>		
DV	0-10V DIMMING (120-277V)*	
DP	PHASE DIMMING (120V ONLY)*	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
<b>CABLE CABLE</b>		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH LONGUEUR DE CABLE</b>		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)*	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>STRUCTURE FINISH FINI STRUCTURE</b>		WHE
WHE	WHITE FINE TEXTURE	
<b>SHADE FINISH FINI ABAT-JOUR</b>		
CHF	CHARCOAL FELT	
SGF	SILVER GRAY FELT	
REF	RED FELT	
BGF	BEIGE FELT	
<b>ACRYLIC FINISH FINI ACRYLIQUE</b>		WH
WH	WHITE	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Now offered in two formats, this soft, colorful and sound absorbing large format downlight pendant is composed of twelve felt-like acoustic panels surrounding a custom LED light source distributing a uniform and direct light.
<b>INSTALLATION:</b>	Easy to install, adjust and level triple aircraft cable mounting with clip-on acoustic panels.
<b>LIGHT SOURCE:</b>	Mute features a custom LED light engine supplied with a standard dimming driver (0-10V or phase).
<b>STRUCTURE:</b>	Precision cut chrome top cover plate and chrome or white canopy.
<b>SHADE:</b>	The custom CNC cut panels are made from recycled PET bottles and are recyclable. Available in silver grey, charcoal, beige or red.
<b>CERTIFIED:</b>	c-CSA-us
<b>CONCEPTION:</b>	Maintenant offert en deux formats, ce luminaire chaleureux, coloré et de grand format est composé de douze panneaux acoustiques feutrés encerclant une source DEL distribuant un éclairage uniforme directe.
<b>INSTALLATION:</b>	Câbles en acier facilitant l'installation, l'ajustement et la mise à niveau. Panneaux acoustiques se fixant rapidement et sans outils autour du noyau central.
<b>SOURCE LUMINEUSE:</b>	Mute est composée d'un module lumineux DEL fait sur mesure et d'une unité d'alimentation à gradation standard (0-10V ou phase).
<b>STRUCTURE:</b>	Plaque chromée découpée avec précision et pavillon blanc ou chrome.
<b>ABAT-JOUR:</b>	Les panneaux acoustiques découpés sur mesure, un feutre synthétique rigide, sont faits de bouteilles de polyéthylène recyclées (PET) et sont recyclables. Offert en gris pâle, gris charbon, beige et rouge.
<b>CERTIFIÉ:</b>	c-CSA-us

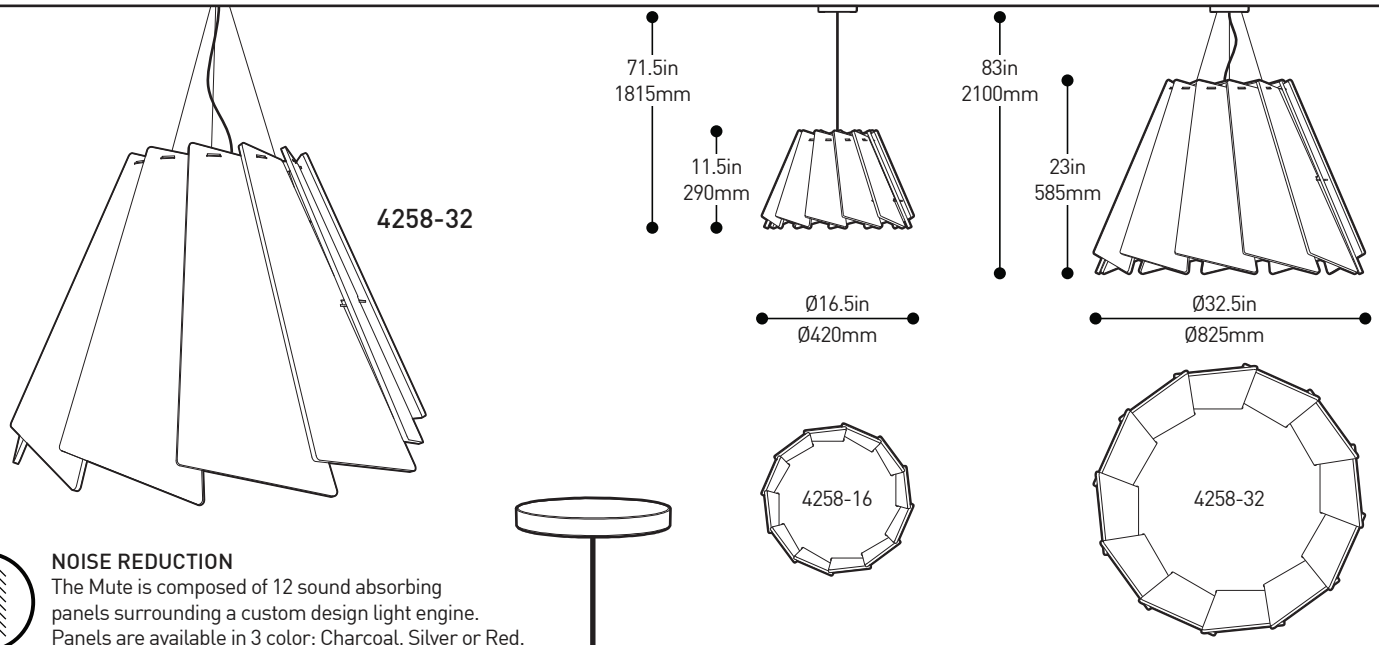

### NOISE REDUCTION

The Mute is composed of 12 sound absorbing panels surrounding a custom design light engine. Panels are available in 3 color: Charcoal, Silver or Red.

**HIGH PERFORMANCE LED BOARD**  
Custom made LED module

**RECYCLED PANELS**  
Custom CNC cut polyester panels made from recycled bottles (PET)  
Panels are recyclable



### SUSPENSION

1 single suspension cable on the smaller version, 3 easy-to-adjust aircraft cables on the larger version for extra support and stability

### INTEGRATED ELECTRONIC DRIVER

For fast access and maintenance

### REFLECTOR

For increased light uniformity and output

### BOTTOM LENS

Frosted acrylic lens for superior light transmission  
Easy installation & locks with acoustic panels

4258-16



## SPECIFICATIONS


	4258-16	4258-32
LIGHT SOURCE	44 x Mid power LED on MCPCB	96 x 0.25W Mid power LED on MCPCB
DELIVERED LUMENS	1379 lm (4000K)	1799 lm (4000K)
CRI	85 CRI Typical	
LIGHT DISTRIBUTION	Direct	
MODULE	UL Recognized - Proprietary design - Made in USA	
STRUCTURE	Acoustic panel composed of recycled polyester bottles (PET). Available in Charcoal, Silver or Red.	
ACOUSTICS	Acoustic material rated at 0.75 NRC	
VOLTAGE	120V or 277V	
DRIVER	Constant current 500mA, UL recognized	Constant current 700mA, UL recognized
DIMMING	Phase dimming (DP) and 0-10V dimming (DV)	
LM-79	Available on request	
WARRANTY	5 years	
FIRE RATING	Equivalent to C423 ASTM E-84/CAN ULC S102 Class A	



225 de Liège Ouest, Suite #200  
Montréal (QC), Canada H2P 1H4  
Tel : 514.385.3515 Fax : 514.385.4169  
www.eurekalighting.com



4258-XX

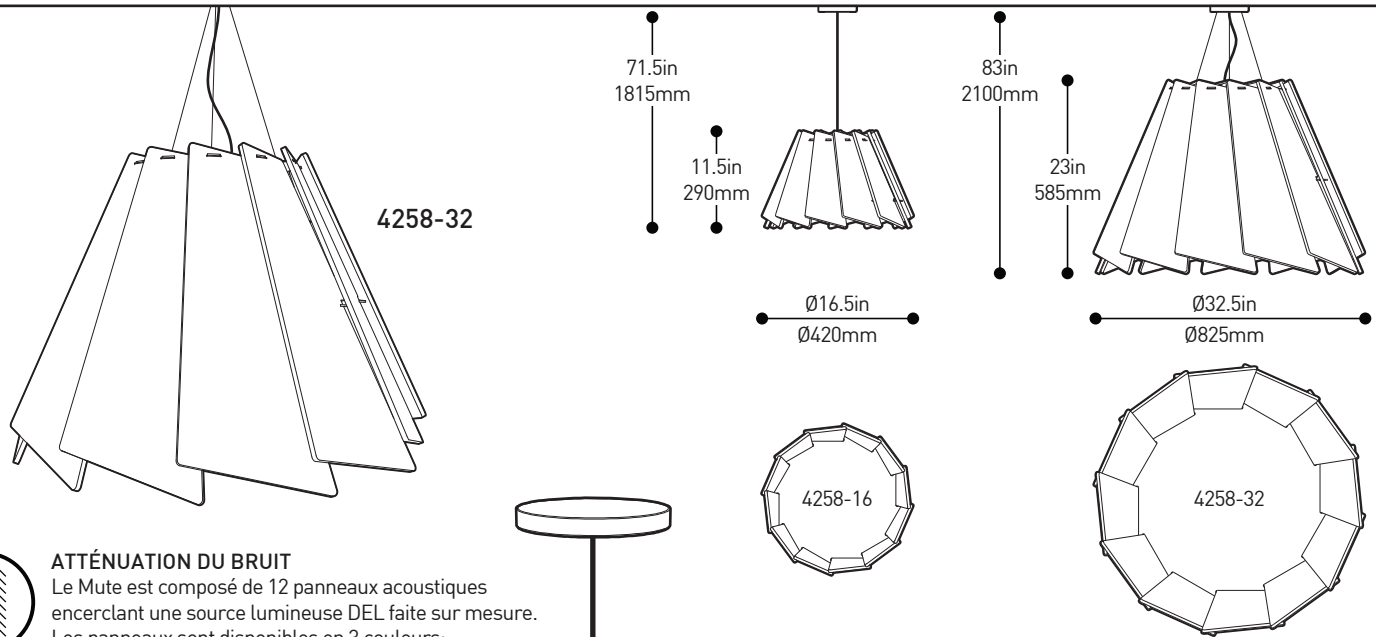

### ATTÉNUATION DU BRUIT

Le Mute est composé de 12 panneaux acoustiques encerclant une source lumineuse DEL faite sur mesure. Les panneaux sont disponibles en 3 couleurs: gris, argent ou rouge.

**MODULE DEL HAUTE PERFORMANCE**  
Disque DEL de 24W conçu sur mesure

**PANNEAUX RECYCLÉS**  
Panneaux de polyester faits de bouteilles de plastique recyclées (PET)  
Les panneaux sont recyclables



### SUSPENSION

1 seul câble de suspension sur la petite version, 3 câbles d'acier facile à ajuster pour un support et une stabilité additionnelle sur la grande version

### PILOTE ÉLECTRONIQUE INTÉGRÉ

Pour faciliter l'accès et la maintenance

### RÉFLECTEUR

Augmente l'uniformité et le flux lumineux

### LENTILLE

Lentille d'acrylique givrée, transmission optique supérieure  
Installation facile en bloquant les panneaux acoustiques

4258-16



## SPÉCIFICATIONS

	4258-16	4258-32
SOURCE LUMINEUSE	44 x LED de 0.25W puissance moyenne sur MCPCB	96 x LED de 0.25W puissance moyenne sur MCPCB
LUMENS RÉELS	1379 lm (4000K)	1799 lm (4000K)
IRC	85 CRI typique	
DISTRIBUTION LUMINEUSE	Directe	
MODULE	Reconnu UL - Design propriétaire - Fait aux É-U	
STRUCTURE	Panneaux acoustique fait de bouteilles de polyester recyclées (PET). Disponibles en gris, argent ou rouge.	
ACOUSTIQUE	Matériel acoustique gradé à 0.75 NRC	
VOLTAGE	120V or 277V	
UNITÉ D'ALIMENTATION	Courrant constant 500mA, reconnu UL	Courrant constant 700mA, reconnu UL
GRADATION	Gradation phase (DP) ou gradation 0-10V (DV)	
LM-79	Disponible sur demande	
GARANTIE	5 ans	
RÉSISTANCE AU FEU	Équivalent à C423 ASTM E-84/CAN ULC S102 Classe A	