

COSMOS 4270 / 4270+2989HG-15

PROJECT PROJET

SPEC TYPE


NOTES






4270



4270+2989HG-15

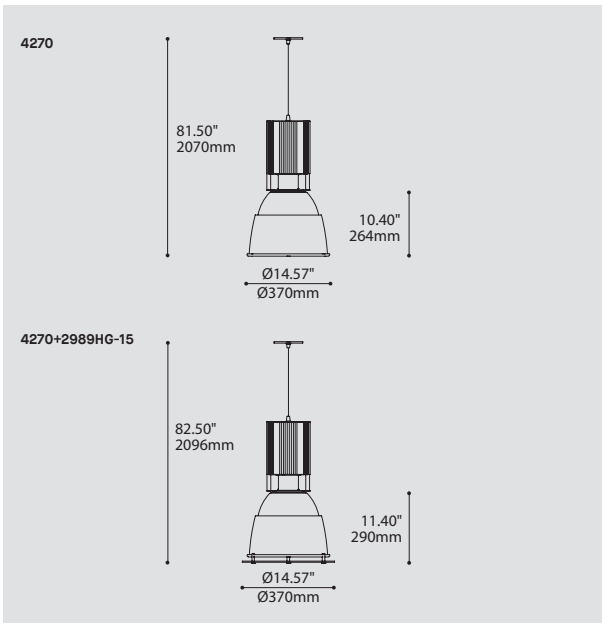

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4270
4270	COSMOS	
LIGHT SOURCE SOURCE LUMINEUSE		
<small>(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)</small>		
CF.T.42	 42W, CFL, TRIPLE TWIN TUBE, G24Q4 BASE	
CF.T.57	 57W, CFL, TRIPLE TWIN TUBE, G24Q5 BASE	
INC.200	 200W, INC, A21 / HAL T10, MEDIUM BASE (120V ONLY)	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
347V*	347 VOLT	
<small>*ONLY AVAILABLE WITH CF.T.42 AND CF.T.57 ONLY (NON-DIMMING BALLAST)</small>		
DIMMING OPTION OPTION DE GRADATION		
<small>AVAILABLE WITH CF.T.42 AND CF.T.57 ONLY</small>		
DM1	ADVANCE MARK 10 ELECTRONIC DIMMING BALLAST	
DM7	ADVANCE MARK 7 ELECTRONIC DIMMING BALLAST	
<small>AVAILABLE WITH CF.T.42 ONLY</small>		
DED	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (ECOSYSTEM DIGITAL LINK WIRING)	
DE3	LUTRON ECOSYSTEM ELECTRONIC DIMMING BALLAST (3-WIRE WIRING)	
CABLE CABLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) <small>FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.</small>	
STRUCTURE FINISH FINI STRUCTURE		
BLK	BLACK	
M G	METALLIC GRAY	
DIFFUSER FINISH FINI DIFFUSEUR		FCHR
FCHR	FROSTED / CHROME	
ACCESSORY ACCESSOIRE		
2989HG-15	PROTECTIVE GLASS	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES**

DESIGN:	Architectural design with layered parabolic shade of reflective for efficient, controlled down light and a small amount of ambient up light.
INSTALLATION:	Field adjustable cable mounting system that allows for sloped ceiling installation.
LIGHT SOURCE:	Wide range of efficient fluorescent and incandescent light sources.
STRUCTURE:	Powder coated extruded aluminum housing with steel mounting hardware and perforated chrome ventilation cage.
DIFFUSER:	Reflective aluminum cowl over a white glass interior diffuser. Decorative protective glass when required.
CERTIFIED:	c-CSA-us
CONCEPTION:	Conception architecturale parabolique combinant un verre blanc et un réflecteur en aluminium réfléchissant pour offrir un éclairage direct efficace et indirect diffus.
INSTALLATION:	Système d'installation sur câble ajustable, permettant une installation sur un plafond en pente.
SOURCE LUMINEUSE:	Plusieurs fluorescents et incandescent à intensité variable.
STRUCTURE:	Boîtier fait d'aluminium extrudé peint avec peinture en poudre résistante, avec quincaillerie de montage en acier et cylindre d'aération perforé chromé.
DIFFUSEUR:	Réflecteur en aluminium réfléchissant sur un diffuseur de verre blanc.
CERTIFIÉ:	Protecteur de verre décoratif. c-CSA-us