

SCOUT ORB CEILING 4548/4549-ORB

PROJECT PROJÉT

SPEC TYPE


NOTES



FINISH



MOUNTING OPTIONS OPTIONS DE MONTAGE

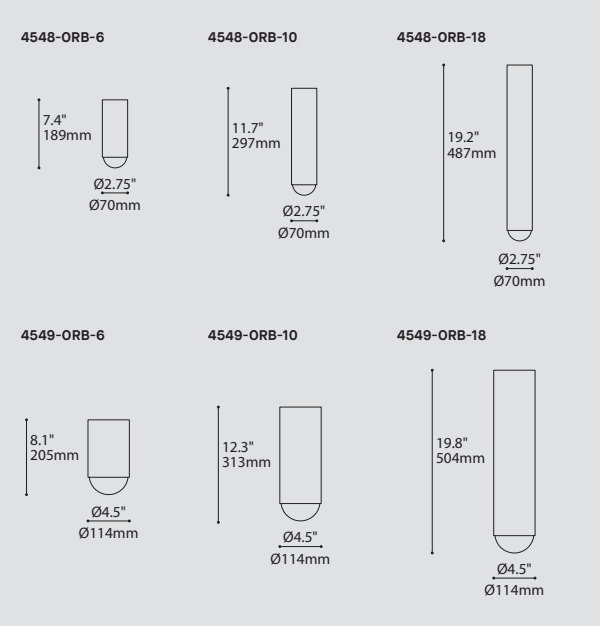

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL		MODÈLE			
4548-ORB-6	SCOUT Ø2.75 - 6"				
4548-ORB-10	SCOUT Ø2.75 - 10"				
4548-ORB-18	SCOUT Ø2.75 - 18"				
4549-ORB-6	SCOUT Ø4.5 - 6"				
4549-ORB-10	SCOUT Ø4.5 - 10"				
4549-ORB-18	SCOUT Ø4.5 - 18"				
LIGHT SOURCE		SOURCE LUMINEUSE			
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR			
27	2700K				
30	3000K				
35	3500K				
40*	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)		90	
90	90+ CRI				
VOLTAGE		VOLTAGE			
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION		OPTION DE CONTRÔLE			
DP*	PHASE DIMMING (120V ONLY)				
DV	0-10V DIMMING (120V-277V)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
* REQUIRES RC2 CANOPY					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
EMERGENCY BATTERY		BATTERIE D'URGENCE			
FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION					
DRIVER AND CANOPY OPTIONS		OPTIONS DE PILOTES ET PAVILLON ^(A)			
INT*	INTERNAL DRIVER, WITH FLAT CANOPY				
RDP**	RECESSED DRIVER, NO CANOPY				
^(A) ONLY FILL IN FOR 4548-ORB. LEAVE EMPTY FOR 4549-ORB					
* FOR 4548-ORB-6, DRIVER WILL BE IN DEEP JUNCTION BOX					
** RDP OPTION NOT OFFERED WITH NLIGHT CONTROL OPTION					
CANOPY FINISH		FINI PAVILLON ^(B)			
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
MATCH*	COLOR MATCH WITH TUBE				
^(B) ONLY FILL IN FOR 4548-ORB, LEAVE EMPTY FOR 4549-ORB					
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
TUBE FINISH		FINI TUBE			
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
ACCESSORY		ACCESSOIRE			
3983	DEEP JUNCTION BOX (PROVIDED FOR 4548-ORB-6 AND 4549-ORB-6 WITH CANOPY)				
ACCESSORY EMERGENCY BATTERY		ACCESSOIRE BATTERIE D'URGENCE			
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				

SCOUT - FINISH OPTIONS / OPTIONS DE FINIS Standard



BLKE
Black Textured



WHE
White Textured

Metallic



CHM
Champagne



SIM
Silver


Premium



AYE
Apricot
Yellow
Textured



BRE
Brick Red
Textured




CBE
Chocolate
Brown
Textured



CPE
Clay Pink
Textured



DBE
Dynamic Blue
Textured



GGE
Grass Green
Textured



HGE
Hunter Green
Textured



LNE
Lunar Gray
Textured



NBE
Navy Blue
Textured



SBE
Sand Beige
Textured




SGE
Sage Gray
Textured



STE
Summer Teal
Textured

SCOUT ORB 454X-ORB

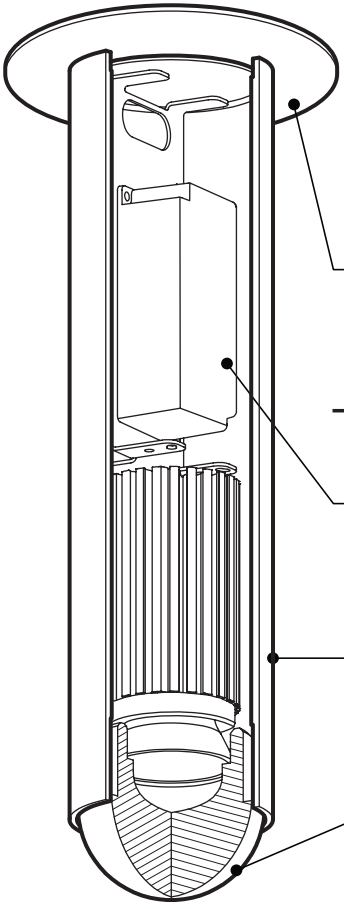


3 MOUNTING OPTIONS
Pendant version designed with a single black or white cable, easy to install and adjust on site. Thin and discreet magnetic canopy. Also available as ceiling and wall mount.


— 4548-ORB-10

2 DIMMING TYPE
Standard phase dimming (DP) or 0-10V dimming (DV). Integrated LED driver (404x-10 et 404x-18). Deep junction box (3983) included (404x-6).

6 FORMATS & 16 FINISHES
Machined aluminium cylindrical structure, offered in textured black, white, light gray, navy blue or pale green finish.


SOLID DOME DIFFUSER
Acrylic translucent diffuser adds a touch of roundness to catch the eye.










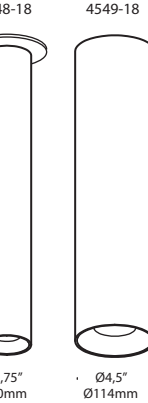





SCOUT EXTRA - ACCESSORY FAMILY




ORB
404X-ORB




PEBBLE
404X-PEB




BELL
404X-BEL




FLARE
404X-FLA




4548-6-GLO
Deep junction box (3983)




4548-10-GLO & 4548-18-GLO
Standard junction box (not)



4548-6-RDP & 4548-10-RDP
& 4548-18-RDP



4549-6-GLO
Deep junction box (3983)




4549-10-GLO & 4549-18-GLO
Standard junction box

PRODUCT SPECIFICATIONX	X48-XX		XX48-XXX		X49-XX		XX49-XXX		X49-XX	
	REG	HO	REG	HO	REG	HO	REG	HO	REG	HO
PERFORMANCE										
SYSTEM WATTAGE	9.5W	13.6W	9.5W	13.6W	13.7W	20W	13.7W	20W	13.7W	20W
DELIVERED LUMENS (4000K)	1051 LM	1425 LM	1051 LM	1425 LM	1394 LM	1907 LM	1509 LM	2070 LM	1472 LM	2021LM
EFFICACY	110.6LM/W	104.7LM/W	110.6LM/W	104.7LM/W	101.7LM/W	95.4LM/W	110.1M/W	103.5LM/W	107.4M/W	101LM/W
OTHER INFORMATIONS										
BEAM ANGLE	24°		45°		28°		48°		64°	
LUMINAIRE'S WEIGHT	1.44KG / 163KG / 196KG		1.44KG / 163KG / 196KG		1.87KG / 2.24KG / 275KG		1.87KG / 2.24KG / 275KG		1.87KG / 2.24KG / 275KG	
	3.16LBS/ 3.58LBS/ 4.32LBS		3.16LBS/ 3.58LBS/ 4.32LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS		4.12LBS/ 4.92LBS/ 6.05LBS	
L70 (LUMEN MAINTENANCE)	> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS		> 63 600 HRS	

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION



454X-ORB



Visit our website for warranty terms and conditions.



TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification. V1.0 — 2025.05