

DIAL 4561

PROJECT PROJET
SPEC TYPE
NOTES



OPTIONS



BLKE

WHE

CHR

FAMILY FAMILLE



4560

2061


46561



47560

46661

47660

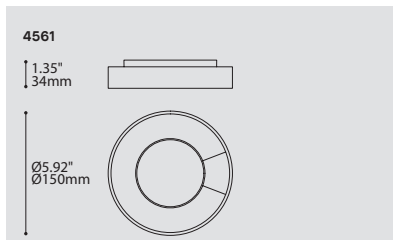

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE	4561 DIAL	4561
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION*		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE. * 3983 ACCESSORY IS PROVIDED FOR DIMMING OPTION		
STRUCTURE FINISH FINI STRUCTURE		BLKE
BLKE	BLACK FINE TEXTURE	
RING FINISH FINI ANNEAU^(A)		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
CHR	CHROME	
^(A) DIFFUSER IS ALWAYS WHITE		
ACCESSORY ACCESSOIRE		3983
3983	DEEP JUNCTION BOX	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

A different take on the Dial, including a new LED module softened by a diffuser to create an ambient ring of light. The thin structure features a hidden rotational mechanism and a clever magnetic-locking friction hinge system.

INSTALLATION:

Effortless installation by means of two screws fastened to a deep junction box (3983) included with product. Designed with a rotating canopy (350°) and high-quality friction hinge (angle up to 60°), Dial can stay into the flat position via an invisible magnetic system. No visible fasteners.

LIGHT SOURCE:

LED module composed of 48 mid-power LEDs. Offered with standard dimming options 0-10V (DV) or phase (DP).

STRUCTURE:

Aluminum structure and custom die-cast heatsink with black fine textured finish. CNC machined aluminum exterior ring available in white or black fine textured finishes, or polished chrome.

CERTIFIED:

c-CSA-us

CONCEPTION:

Une approche différente au Dial, incluant un nouveau module DEL adouci par un diffuseur pour créer un anneau lumineux ambiant. La structure mince intègre un mécanisme de rotation invisible et un système de pivot à friction à fermeture magnétique.

INSTALLATION:

Installation sans tracas grâce à 2 vis assemblées sur une boîte de jonction profonde (3983) incluse. Conçu avec un pavillon rotatif (350°) et un système de pivot à friction (angle jusqu'à 60°), Dial peut demeurer à plat grâce au système magnétique innovateur. Aucune vis apparente.

SOURCE LUMINEUSE:

Module DEL composé de 48 diodes de puissance moyenne. Offert avec gradation standard de type 0-10V (DV) ou phase (DP).

STRUCTURE:

Structure et radiateur conçus sur mesure en aluminium moulé avec finition noire texturée. Anneau extérieur cylindrique en aluminium usiné offert en peinture noire ou blanche finement texturée ou en chrome poli.

CERTIFIÉ:

c-CSA-us