

FLOAT 47640


PROJECT PROJÉT
SPEC TYPE
NOTES



OPTIONS



BLK

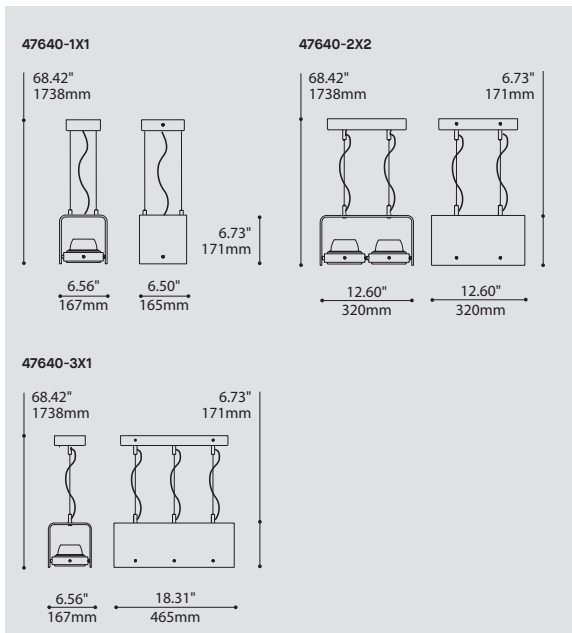

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

47640-1X1 FLOAT 1X1
 47640-2X2 FLOAT 2X2
 47640-3X1 FLOAT 3X1

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

MR16.50 50W, HAL, MR16, GU5.3 BASE
 GZ10.50 50W, HAL, MR16, GZ10 BASE (120V ONLY)
 PAR20.50 50W, INC, PAR20, MEDIUM BASE (120V ONLY)
 PAR30.75 75W, INC, PAR30, MEDIUM BASE (120V ONLY)
 LED.4 4W, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K
 35 3500K
 40 4000K

ANGLE BEAM ANGLE DE FAISCEAU

FOR LED ONLY

17 17°
 48 48°

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

AVAILABLE WITH LED ONLY

DV 0-10V DIMMING (120-277V)
 DP PHASE DIMMING (120V ONLY)

LED DIMMING DRIVER IS OPTIONAL FOR 46740-1X1 AND STANDARD FOR THE 47640-2X2 AND 47640-3X1. PLEASE SPECIFY YOUR DIMMING TYPE.

CABLE CABLE

AC

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
 ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

STRUCTURE FINISH FINI STRUCTURE

CHR CHROME

CHR

ACRYLIC FINISH FINI ACRYLIQUE

CLR CLEAR

BLK GLOSSY BLACK

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

Clean and modern styling. The minimalist frame suspends up to four chrome spotlight rings.

INSTALLATION:

Suspended cable mount.

LIGHT SOURCE:

Wide range of projector lamps light sources available.

STRUCTURE:

Acrylic frame with two axis, aiming die-cast and plated gimble rings.

CERTIFIED:

c-CSA-us

CONCEPTION:

Forme légère et contemporaine. Structure minimaliste pouvant suspendre jusqu'à quatre projecteurs chromés.

INSTALLATION:

Suspension sur câble.

SOURCE LUMINEUSE:

Plusieurs lampes à projecteurs offertes.

STRUCTURE:

Cadre en acrylique avec deux anneaux injectés et plaqués, pivotant sur deux axes.

CERTIFIÉ:

c-CSA-us

FAMILY FAMILLE



46640