



COMPASS 4802-36 / 4802DI-36

PROJECT PROJÉT
SPEC TYPE
NOTES

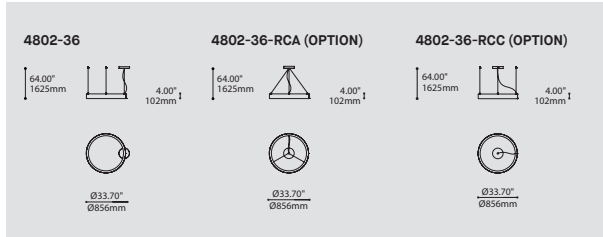

MOUNTING OPTIONS OPTIONS DE MONTAGE

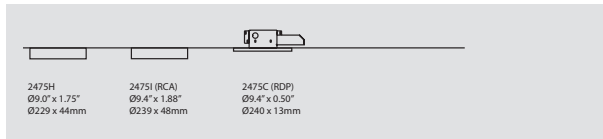

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4802-36	COMPASS 36"	
4802DI-36	COMPASS UPLIGHT 36"	
LIGHT SOURCE SOURCE LUMINEUSE		0)(
(WATTAGE, LAMP TYPE, OTHER INFO)		
4802-36		
LED	REGULAR OUTPUT	
4802DI-36		
LED	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
DIMMING OPTION OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
DRIVER POSITION POSITION DU PILOT		
RDP	RECESSED DRIVER*	
*3981C OR 3981D ACCESSORY IS REQUIRED		
CABLE CABLE		AC
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING OPTION OPTION DE MONTAGE		RC
RC	ROUND CANOPY / PAVILLON ROND	
FOR RCA: 1.88" CANOPY (2475I)		
FOR RECESSED DRIVER OPTION: 0.50" CANOPY (2475C)		
FOR STANDARD: 1.75" CANOPY (2475H)		
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE		
IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES WILL BE PROVIDED		
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER*	
RCC	CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
*NOT AVAILABLE WITH RECESSED DRIVER (RDP)		
CANOPY FINISH FINI PAVILLON		WHE
WHE	WHITE FINE TEXTURE	
RING FINISH FINI ANNEAUX		WHE
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (4802D-36)	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (4802DI-36)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

- BIM**
- DIM**
- IES**
- LED**

- DESIGN:** Marrying simplicity and fineness, the Compass enhances the space with its elegantly shaped luminous halos.
- INSTALLATION:** Easy to install, adjust and level using triple aircraft cables; available with straight or angled cables towards a central canopy.
- LIGHT SOURCE:** Double row of custom designed light engine featuring high performance LED.
- STRUCTURE:** Seamlessly finished, rolled aluminum extrusion with highly reflective matte white polyester powder coating enclosed with an extruded optical PMMA diffuser snapped in place and finished with an elegant chrome plated joiner.
- CERTIFIED:** c-CSA-us