



COMPASS 4802-54 / 4802DI-54

PROJECT PROJÉT
SPEC TYPE
NOTES

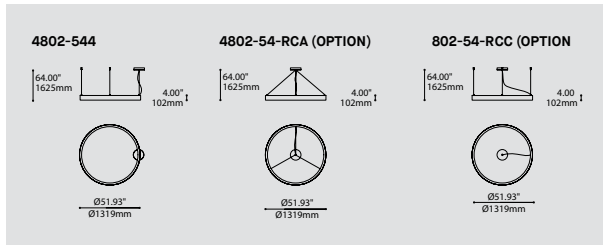

MOUNTING OPTIONS OPTIONS DE MONTAGE

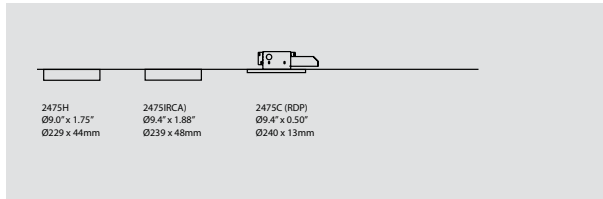

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	
4802-54 COMPASS 54"	
4802DI-54 COMPASS UPLIGHT 54"	
LIGHT SOURCE SOURCE LUMINEUSE	LED
4802-54 LED REGULAR OUTPUT	
4802DI-54 LED REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
27* 2700K	
30 3000K	
35 3500K	
40 4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	90
90 90+ CRI	
VOLTAGE VOLTAGE	
120V 120 VOLT	
277V 277 VOLT	
DIMMING OPTION OPTION DE GRADATION	
DV 0-10V DIMMING (120V-277V)	
DP PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE.	
DRIVER POSITION POSITION DU PILOT	
RDP RECESSED DRIVER*	
3981D ACCESSORY IS REQUIRED	
CABLE CÂBLE	AC
AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE	
60 60" AIRCRAFT CABLE (STD LENGTH)	
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING OPTION OPTION DE MONTAGE	
RC ROUND CANOPY / PAVILLON ROND	
FOR RCA: 1.88" CANOPY (2475I)	
FOR RECESSED DRIVER OPTION: 0.50" CANOPY (2475C)	
FOR STANDARD: 1.75" CANOPY (2475H)	
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE	
RCA CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER*	
RCC CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
*NOT AVAILABLE WITH RECESSED DRIVER (RDP)	
CANOPY FINISH FINI PAVILLON	WHE
WHE WHITE FINE TEXTURE	
RING FINISH FINI DIFFUSER	WHE
WHE WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR	WH
WH WHITE	
ACCESSORY ACCESSOIRE	
3981D JUNCTION BOX FOR RECESSED DRIVER OPTION	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** Marrying simplicity and fineness, the Compass enhances the space with its elegantly shaped luminous halos.
- INSTALLATION:** Easy to install, adjust and level using triple aircraft cables; available with straight or angled cables towards a central canopy.
- LIGHT SOURCE:** Double row of custom designed light engine featuring high performance LED.
- STRUCTURE:** Seamlessly finished, rolled aluminum extrusion with highly reflective matte white ployester powder coating enclosed with an extruded optical PMMA diffuser snapped in place and finished with an elegant chrome plated joiner.
- CERTIFIED:** c-CSA-us