



# COMPASS 4802-54 / 4802DI-54

PROJECT PROJÉT
SPEC TYPE
NOTES

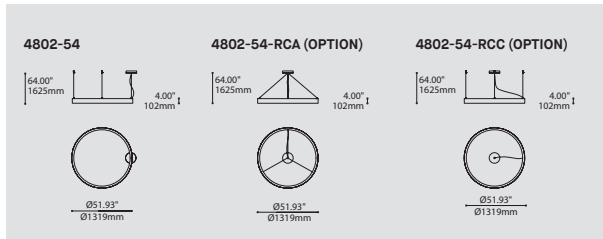

## MOUNTING OPTIONS OPTIONS DE MONTAGE

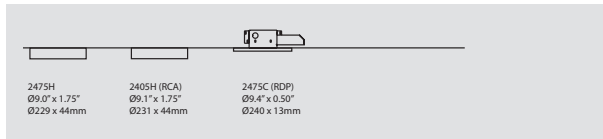

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
<b>MODEL</b> MODÈLE		
4802-54	COMPASS 54"	
4802DI-54	COMPASS UPLIGHT 54"	
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE		
(WATTAGE, LAMP TYPE, OTHER INFO)		
4802-54		
LED	REGULAR OUTPUT	
4802DI-54		
LED	REGULAR OUTPUT	
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
40	4000K	
<b>VOLTAGE</b> VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
<b>DIMMING OPTION</b> OPTION DE GRADATION		
DV	0-10V DIMMING (120-277V)	
DP	PHASE DIMMING (120V ONLY)	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT. PLEASE SPECIFY YOUR DIMMING TYPE.		
<b>DRIVER POSITION</b> POSITION DU PILOT		
RDP	RECESSED DRIVER*	
*3981C (80W) OR 3981D (128W & 174W) ACCESSORY IS REQUIRED		
<b>CABLE</b> CABLE		<b>AC</b>
AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE	
<b>CABLE LENGTH</b> LONGUEUR DE CABLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>MOUNTING OPTION</b> OPTION DE MONTAGE		<b>RC</b>
RC	ROUND CANOPY / PAVILLON ROND	
FOR RCA: 1.75" CANOPY (2405H)		
FOR RECESSED DRIVER OPTION: 0.50" CANOPY (2475C)		
FOR STANDARD: 1.75" CANOPY (2475H)		
<b>MOUNTING CABLE OPTION</b> OPTION DE MONTAGE DE CABLE		
IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES WILL BE PROVIDED		
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER*	
RCC	CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES	
*NOT AVAILABLE WITH RECESSED DRIVER (RDP)		
<b>CANOPY FINISH</b> FINI PAVILLON		<b>WHE</b>
WHE	WHITE FINE TEXTURE	
<b>RING FINISH</b> FINI ANNEAUX		<b>WHE</b>
WHE	WHITE FINE TEXTURE	
<b>DIFFUSER FINISH</b> FINI DIFFUSEUR		<b>WH</b>
WH	WHITE	
<b>ACCESSORY</b> ACCESSOIRE		
3981C	JUNCTION BOX FOR RECESSED DRIVER OPTION (4802-54 DV)	
3981D	JUNCTION BOX FOR RECESSED DRIVER OPTION (4802-54 DP, ALL 4802DI)	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Marrying simplicity and fineness, the Compass enhances the space with its elegantly shaped luminous halos.
<b>INSTALLATION:</b>	Easy to install, adjust and level using triple aircraft cables; available with straight or angled cables towards a central canopy.
<b>LIGHT SOURCE:</b>	Double row of custom designed light engine featuring high performance LED.
<b>STRUCTURE:</b>	Seamlessly finished, rolled aluminum extrusion with highly reflective matte white polyester powder coating enclosed with an extruded optical PMMA diffuser snapped in place and finished with an elegant chrome plated joiner.
<b>CERTIFIED:</b>	c-CSA-us