


# RIVER - 4803 ORGANIC PENDANT

PROJECT PROJCT
SPEC TYPE
NOTES




## FINISH FINI

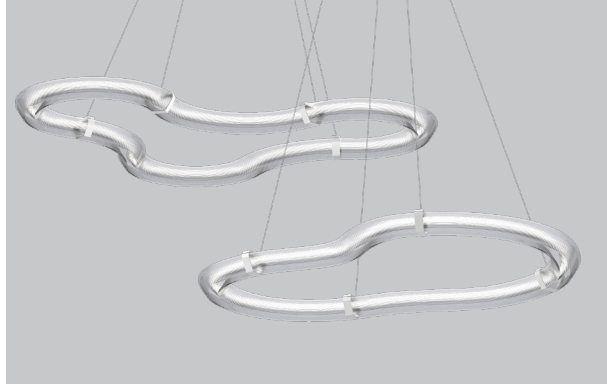

## FAMILY FAMILLE



## DRIVER OPTION OPTION DE PILOTE

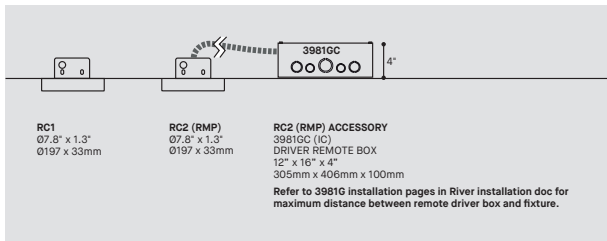

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE	
<b>MODEL MODÈLE</b>			
4803-FRE	RIVER FREEFORM PENDANT 65"		
4803-LAG	RIVER LAGOON PENDANT 58"		
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>		<b>LED</b>	
<b>LED</b>	REGULAR OUTPUT		
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>			
22	2200K		
27	2700K		
30	3000K		
35	3500K		
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>		<b>90</b>	
90	90+ CRI		
<b>VOLTAGE VOLTAGE</b>			
120V	120 VOLT		
277V	277 VOLT		
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>			
DV	0-10V DIMMING (120V-277V)		
NLTAIR2*	NLIGHT AIR CONTROL GEN 2		
NLIGHT*	NLIGHT WIRED CONTROL		
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
	* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>			
	EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX		
	* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION		
<b>CABLE CÂBLE</b>		<b>POA</b>	
POA	POWER OVER AIRCRAFT SUSPENSION (NO POWER CABLE)		
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>			
60	60" CABLE (STD LENGTH)		
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)		
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>MOUNTING MONTAGE</b>			
	CENTERED ROUND CANOPY / PAVILLON ROND CENTRE		
REC1*	SCREWLESS Ø7.75" X 1.35" CANOPY		
REC2	REMOTE DRIVER OPTION SCREWLESS Ø7.75" X 1.35" CANOPY		
	* NOT AVAILABLE FOR 4803-FRE		
<b>MOUNTING OPTIONS OPTIONS DE MONTAGE</b>		<b>RCA</b>	
RCA	CENTERED ROUND CANOPY - AIRCRAFT CABLES ANGLED TO CENTER		
<b>CANOPY AND ANCHORS FINISH FINI PAVILLON ET ANCRAGE(S)</b>			
BLKE	BLACK FINE TEXTURE		
WHE	WHITE FINE TEXTURE		
MATCH*	COLOR MATCH WITH BRACKET		
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
<b>BRACKET FINISH FINI BRACKET</b>			
BLKE	BLACK	GGE*	GRASS GREEN
WHE	WHITE	HGE*	HUNTER GREEN
CHM*	CHAMPAGNE METALLIC	LNE*	LUNAR GREY
SIM*	SILVER METALLIC	NBE*	NAVY BLUE
AYE*	APRICOT YELLOW	SBE*	SAND BEIGE
BRE*	BRICK RED	SGE*	SAGE GREY
CBE*	CHOCOLATE BROWN	STE*	SUMMER TEAL
CPE*	CLAY PINK	RAL**	PLEASE SPECIFY RAL CODE
DBE*	DYNAMIC BLUE		
	ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM.		
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
	** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
<b>ACCESSORY ACCESSOIRE</b>			
	ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK		
39NLWA*	NLIGHT WIRED REMOTE POWER PACK		
3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"		
<b>ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE</b>			
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY		

# RIVER 4803/3803

## 360 FLEXIBLE LED

Providing a soft 360 degree glow, the silicone molded light engine adapts seamlessly to any shape.

Available in 2200K, 2700K, 3000K and 3500K

## POWER OVER AIRCRAFT

The cordless fixture is entirely powered by the aircraft cables, allowing for a minimalist installation.

Also available in surface mount.

## BRACKET


A sleek aluminum bracket adds a pop of color to the fixture. Available in a variety of 16 finishes.

## LARGE SCALE 3D print


Rib textured plastic is entirely 3D printed in clear PETG, allowing for many shapes and sizes.




4803-STRAIGHT  
32" / 52"




4803-ROUND  
36" / 50" / 72"




4803-SQUARE  
36" / 56" / 72"



4803-OBLONG  
36" / 48" / 68"



4803-FREEFORM  
65"



4803-LAGOON  
58"

## PRODUCT SPECIFICATION

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
<b>PERFORMANCE</b>	REG	REG	REG	REG	REG	REG
<b>SYSTEM WATTAGE</b>	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
<b>DELIVERED LUMENS (4000K)</b>	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
<b>EFFICACY</b>	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
<b>OTHER INFORMATION</b>						
<b>LUMINAIRE'S WEIGHT</b>	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Refer to installation sheets for weight per configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
<b>L70 (LUMEN MAINTENANCE)</b>	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

## EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visit our website for warranty terms and conditions.



## TECHNICAL DATA

# RIVER 4803/3803

## SOURCE DEL FLEXIBLE 360°

Offrant une lumière douce et enveloppante sur 360°, la source DEL moulée en silicone s'adapte parfaitement à toutes les formes.

Offerte en 2200K, 2700K, 3000K et 3500K.

## ALIMENTATION INTÉGRÉE AUX CÂBLES

Entièrement alimenté par ses câbles de suspension conducteurs, le luminaire se dispense de toute alimentation apparente, permettant une installation d'une grande pureté visuelle.

Disponible également en version en surface.

## SUPPORT EN ALUMINIUM


Épuré et graphique, le support en aluminium apporte une touche de couleur au luminaire. Offert dans une palette de 16 finis.

## IMPRESSION 3D GRAND FORMAT


Le diffuseur nervuré en PETG transparent est entièrement imprimé en 3D, permettant une grande diversité de formes et de dimensions.




4803-STRAIGHT  
32" / 52"




4803-ROUND  
36" / 50" / 72"




4803-SQUARE  
36" / 56" / 72"



4803-OBLONG  
36" / 48" / 68"



4803-FREEFORM  
65"



4803-LAGOON  
58"

## SPECIFICATIONS PRODUIT

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
<b>PERFORMANCE</b>	REG	REG	REG	REG	REG	REG
<b>PUISSANCE TOTALE</b>	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
<b>LUMENS RÉELS (4000K)</b>	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
<b>EFFICACITÉ</b>	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
<b>OTHER INFORMATION</b>						
<b>POIDS DU LUMINAIRE</b>	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Se référer à la feuille d'installation pour connaître le poids spécifique à chaque configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
<b>L70 (MAINTENANCE DE LA LUMIÈRE)</b>	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

## FACTEUR D'EFFICACITÉ

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visitez notre site Web pour les termes et conditions.