


RIVER - 4803 LINEAR PENDANT


PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI

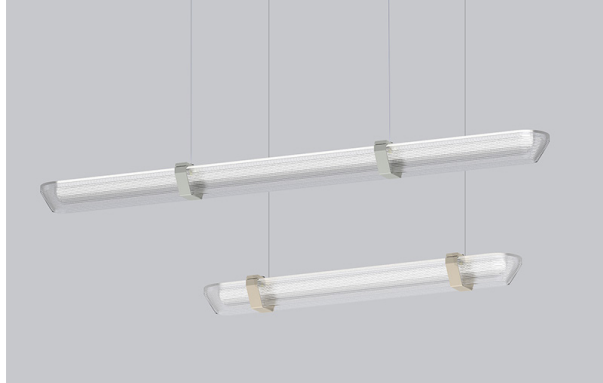


FAMILY FAMILLE

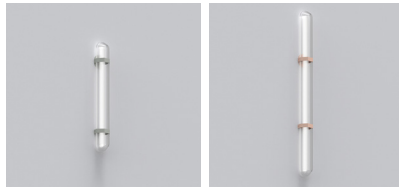

WALL 4803-S-32


WALL 4803-S-52

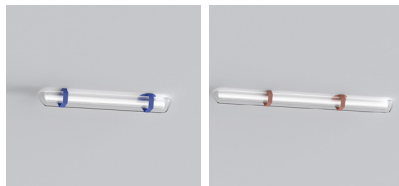

CEILING 4803-S-32

CEILING 4803-S-52

MOUNTING OPTIONS OPTION DE MONTAGE

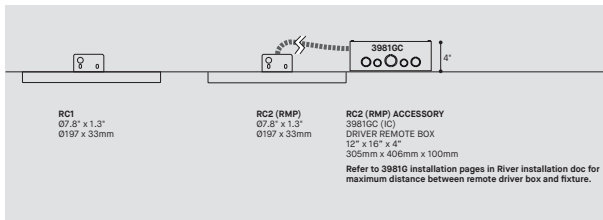

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

4803-L32 RIVER STRAIGHT PENDANT 32"
4803-L52 RIVER STRAIGHT PENDANT 52"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

22 2200K
27 2700K
30 3000K
35 3500K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
NLTAIR2* NLIGHT AIR CONTROL GEN 2
NLIGHT* NLIGHT WIRED CONTROL
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA FOR NLTAIR2 OR 39NLWA FOR NLIGHT)
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

EMERGENCY BATTERY BATTERIE D'URGENCE

EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS

EMB* EMERGENCY BATTERY FOR REMOTE BOX
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION

CABLE CÂBLE

POA POWER OVER AIRCRAFT SUSPENSION (NO POWER CABLE)

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" CABLE (STD LENGTH)
** CUSTOM CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

CENTERED RECTANGULAR CANOPY / PAVILLON RECTANGULAIRE CENTRÉ

REC1 SCREWLESS RECTANGLE CANOPY 22" X 1.25"
REC2 REMOTE DRIVER OPTION SCREWLESS RECTANGLE CANOPY 22" X 1.25"

MOUNTING OPTIONS OPTIONS DE MONTAGE

RC CANOPY CENTERED WITH LUMINAIRE
* STRAIGHT CABLES

CANOPY AND ANCHORS FINISH FINI PAVILLON ET ANCRAGE(S)

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
MATCH* COLOR MATCH WITH BRACKET
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

BRACKET FINISH FINI BRACKET

BLKE BLACK
WHE WHITE
CHM* CHAMPAGNE METALLIC
SIM* SILVER METALLIC
AYE* APRICOT YELLOW
BRE* BRICK RED
CBE* CHOCOLATE BROWN
CPE* CLAY PINK
DBE* DYNAMIC BLUE
GGE* GRASS GREEN
HGE* HUNTER GREEN
LNE* LUNAR GREY
NBE* NAVY BLUE
SBE* SAND BEIGE
SGE* SAGE GREY
STE* SUMMER TEAL
RAL** PLEASE SPECIFY RAL CODE

ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM.

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING

39NLAA* NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA* NLIGHT WIRED REMOTE POWER PACK
3981GC DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"

ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE

3981EA ELECTRICAL BOX FOR EMB EMERGENCY BATTERY

RIVER 4803/3803

360 FLEXIBLE LED

Providing a soft 360 degree glow, the silicone molded light engine adapts seamlessly to any shape.

Available in 2200K, 2700K, 3000K and 3500K

POWER OVER AIRCRAFT

The cordless fixture is entirely powered by the aircraft cables, allowing for a minimalist installation.

Also available in surface mount.

BRACKET


A sleek aluminum bracket adds a pop of color to the fixture. Available in a variety of 16 finishes.

LARGE SCALE 3D print


Rib textured plastic is entirely 3D printed in clear PETG, allowing for many shapes and sizes.




4803-STRAIGHT
32" / 52"




4803-ROUND
36" / 50" / 72"




4803-SQUARE
36" / 56" / 72"



4803-OBLONG
36" / 48" / 68"



4803-FREEFORM
65"

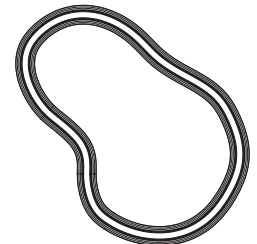

4803-LAGOON
58"

PRODUCT SPECIFICATION

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
PERFORMANCE	REG	REG	REG	REG	REG	REG
SYSTEM WATTAGE	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
DELIVERED LUMENS (4000K)	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
EFFICACY	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
OTHER INFORMATION						
LUMINAIRE'S WEIGHT	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Refer to installation sheets for weight per configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visit our website for warranty terms and conditions.



TECHNICAL DATA

RIVER 4803/3803

SOURCE DEL FLEXIBLE 360°

Offrant une lumière douce et enveloppante sur 360°, la source DEL moulée en silicone s'adapte parfaitement à toutes les formes.

Offerte en 2200K, 2700K, 3000K et 3500K.

ALIMENTATION INTÉGRÉE AUX CÂBLES

Entièrement alimenté par ses câbles de suspension conducteurs, le luminaire se dispense de toute alimentation apparente, permettant une installation d'une grande pureté visuelle.

Disponible également en version en surface.

SUPPORT EN ALUMINIUM

Épuré et graphique, le support en aluminium apporte une touche de couleur au luminaire. Offert dans une palette de 16 finis.

IMPRESSION 3D GRAND FORMAT


Le diffuseur nervuré en PETG transparent est entièrement imprimé en 3D, permettant une grande diversité de formes et de dimensions.




4803-STRAIGHT
32" / 52"




4803-ROUND
36" / 50" / 72"




4803-SQUARE
36" / 56" / 72"



4803-OBLONG
36" / 48" / 68"



4803-FREEFORM
65"



4803-LAGOON
58"

SPECIFICATIONS PRODUIT

	4803-STRAIGHT 32" / 52"	4803-ROUND 36" / 50" / 72"	4803-OBLONG 36" / 50" / 72"	4803-SQUARE 38" / 56" / 72"	4803-FREEFORM 65"	4803-LAGOON 58"
PERFORMANCE	REG	REG	REG	REG	REG	REG
PUISSANCE TOTALE	16.3W / 28.1W	59.8W / 84.2W / 126.3W	42.2W / 59.6W / 84.2W	73.7W / 112.2W / 168.7W	112.2W	73.7W
LUMENS RÉELS (4000K)	715 LM / 1546 LM	3060 LM / 4325 LM / 6494 LM	2165 LM / 3062 LM / 4329 LM	3783 LM / 5760 LM / 8665 LM	7575 LM	5760 LM
EFFICACITÉ	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W	54.8 LM/W
OTHER INFORMATION						
POIDS DU LUMINAIRE	4.3LBS / 7.8LBS	15.5LBS / 21.9LBS / 32.9LBS	10.9LBS / 15.5LBS / 22.0LBS	19.2LBS / 29.1LBS / 40.8LBS	29.2LBS	19.4LBS
<small>* Se référer à la feuille d'installation pour connaître le poids spécifique à chaque configuration.</small>	1.9KG / 3.5KG	7.0KG / 10.0KG / 15.0KG	5.0KG / 7.1KG / 10.0KG	8.7KG / 13.2KG / 18.5KG	13.3KG	8.8KG
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

FACTEUR D'EFFICACITÉ

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Visitez notre site Web pour les termes et conditions.