



ODEON 4805-80 / 118

PROJECT PROJET
SPEC TYPE
NOTES

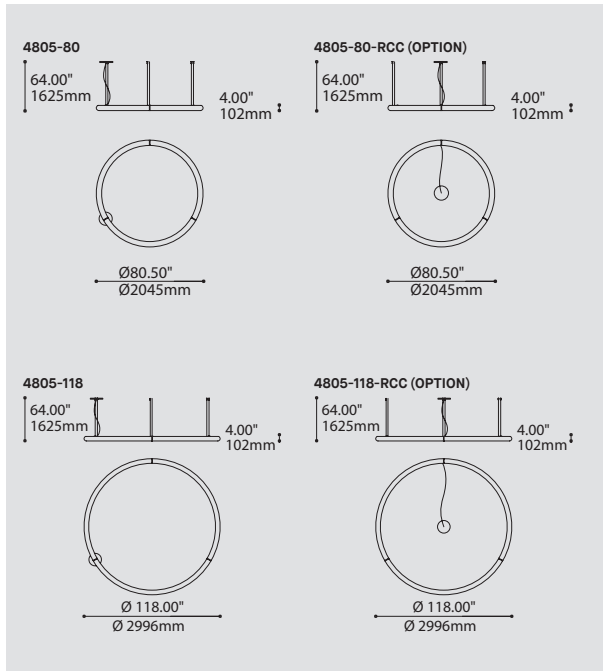

MOUNTING OPTIONS OPTIONS DE MONTAGE

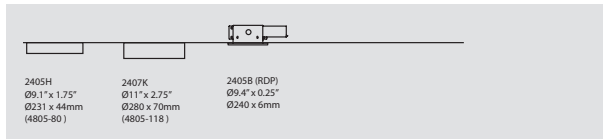

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE

4805-80 ODEON 80"
4805-118 ODEON 118"

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, OTHER INFO)

4805-80
LED REGULAR OUTPUT

4805-118
LED REGULAR OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120-277V)
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT.

DRIVER POSITION POSITION DU PILOT

RDP RECESSED DRIVER*
*3981D ACCESSORY IS REQUIRED

CABLE CABLE

AC AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" AIRCRAFT CABLE (STD LENGTH)
** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING OPTION OPTION DE MONTAGE

RC ROUND CANOPY / PAVILLON ROND
FOR RECESSED DRIVER OPTION: 0.25" (2405B)
FOR STANDARD: 1.75" CANOPY (2405H) (FOR 4805-80 ONLY)
FOR STANDARD: 2.75" CANOPY (2407K) (FOR 4805-118 ONLY)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CABLE

IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD

RCC CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES

STRUCTURE FINISH FINI STRUCTURE

WH WHITE

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

JOINER FINISH FINI JONCTION

CHR CHROME

ACCESSORY ACCESSOIRE

3981D JUNCTION BOX FOR RECESSED DRIVER OPTION

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN: Round everybody up for an impressive show. Available in both Ø80" and Ø118", Odeon will brighten up any large space and make a glowing statement of bold elegance.

LIGHT SOURCE: Custom designed curving LED light engine provides even illumination over the entire surface. Available in 3000K, 3500K and 4000K and 0-10V dimming is standard.

STRUCTURE: Circles are formed from three sections of extremely durable rotomolded MDPE and are connected on-site with chromed joiner caps.

CERTIFIED: c-CSA-us




CONCEPTION: Entrez dans le cercle, contemplez ce spectacle. Disponible en deux tailles de Ø80" et Ø118", Odeon saura illuminer tous les grands espaces et leur donnera un éclat d'élégance audacieuse.

SOURCE LUMINEUSE: Module DEL courbé conçu et fabriqué sur mesure, offrant une illumination uniforme sur la totalité de la surface. Disponible en 3000K, 3500K ou 4000K avec gradation de type 0-10V.

STRUCTURE: Les cercles sont faits de trois sections de MDPE rotomoulées très durables connectées lors de l'installation avec des embouts chromés.


CERTIFIÉ: c-CSA-us

ODEON 4805-80 / 118

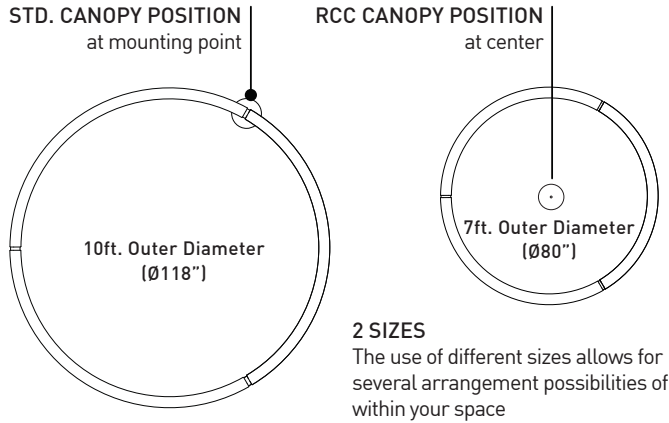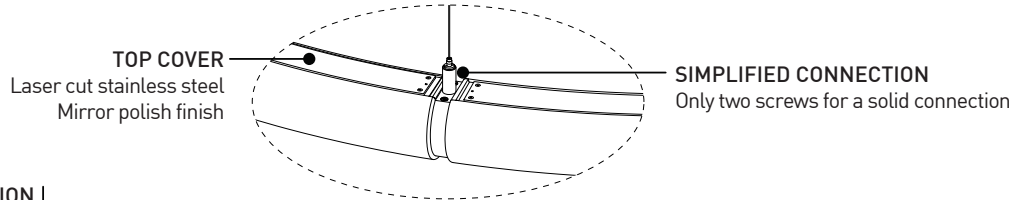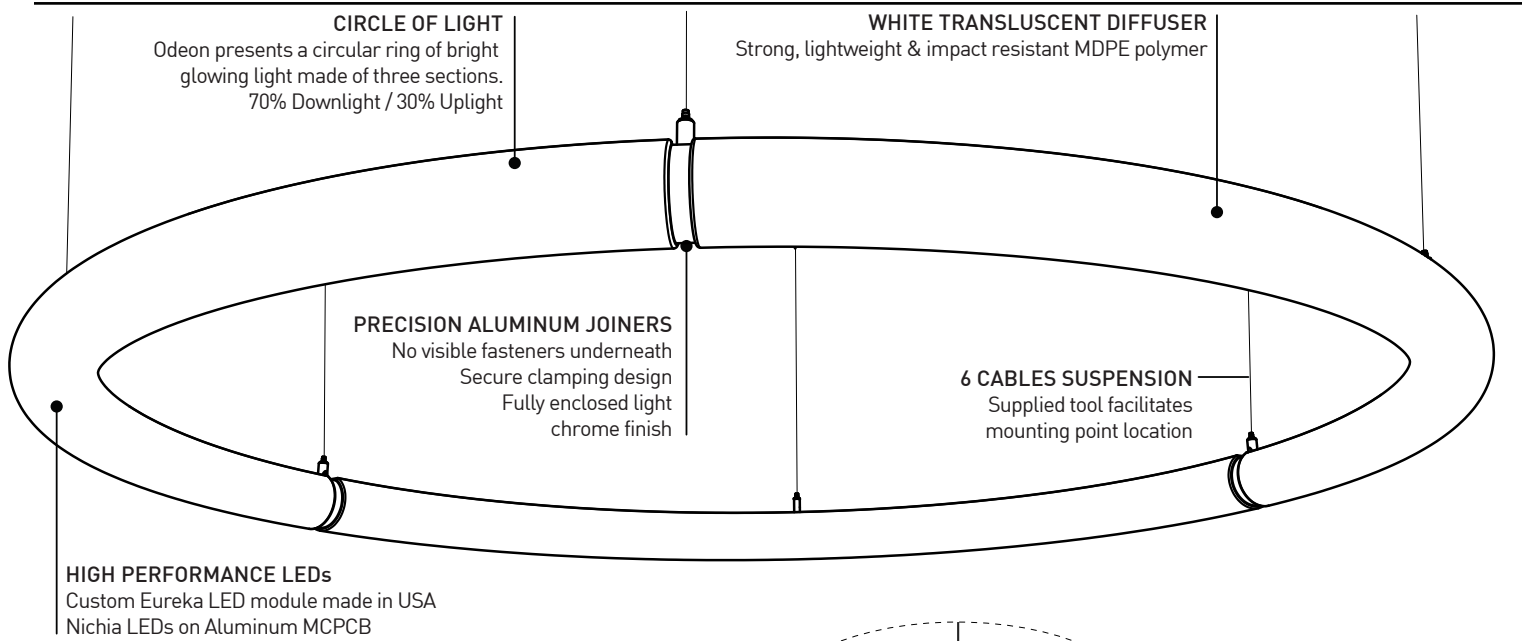


CANOPY OPTIONS:

STANDARD CANOPY
Odeon 80": Ø9.1" X 1.75" H
Odeon 118": Ø11" X 2.75" H
Mounting on a 4" standard j-box



LOW PROFILE CANOPY
Odeon 80/118: Ø9.4" X 0.25" H
Recessed drivers for discreet installation
Mounts on Eureka box 3981D 6" x 6"
sold and installed separately
Requires 6" clearance above ceiling

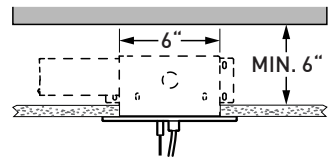


PRODUCT SPECIFICATION	4805 - 80	4805 - 118
PERFORMANCE		
SYSTEM WATTAGE	141 W	211.9 W
DELIVERED LUMENS (4000K)	18502 LM	27900 LM
EFFICACY	131.2 LM/W	131.6 LM/W
OTHER INFORMATIONS		
LUMINAIRE'S WEIGHT	23.72 LBS / 10.78 KG	37.07 LBS / 16.85 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94




LIGHT DISTRIBUTION

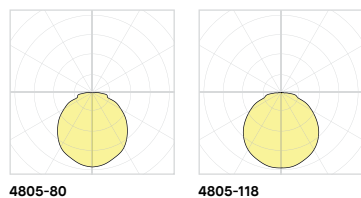

Visit our website for warranty terms and conditions.




TECHNICAL DATA

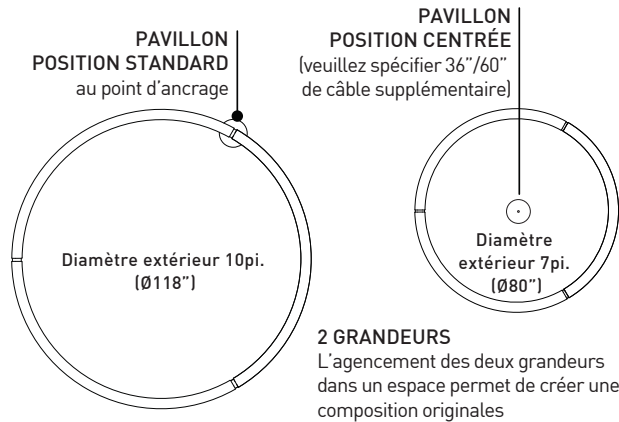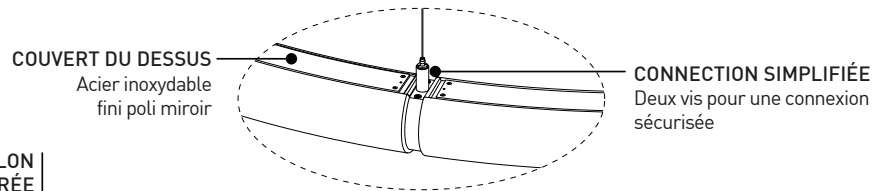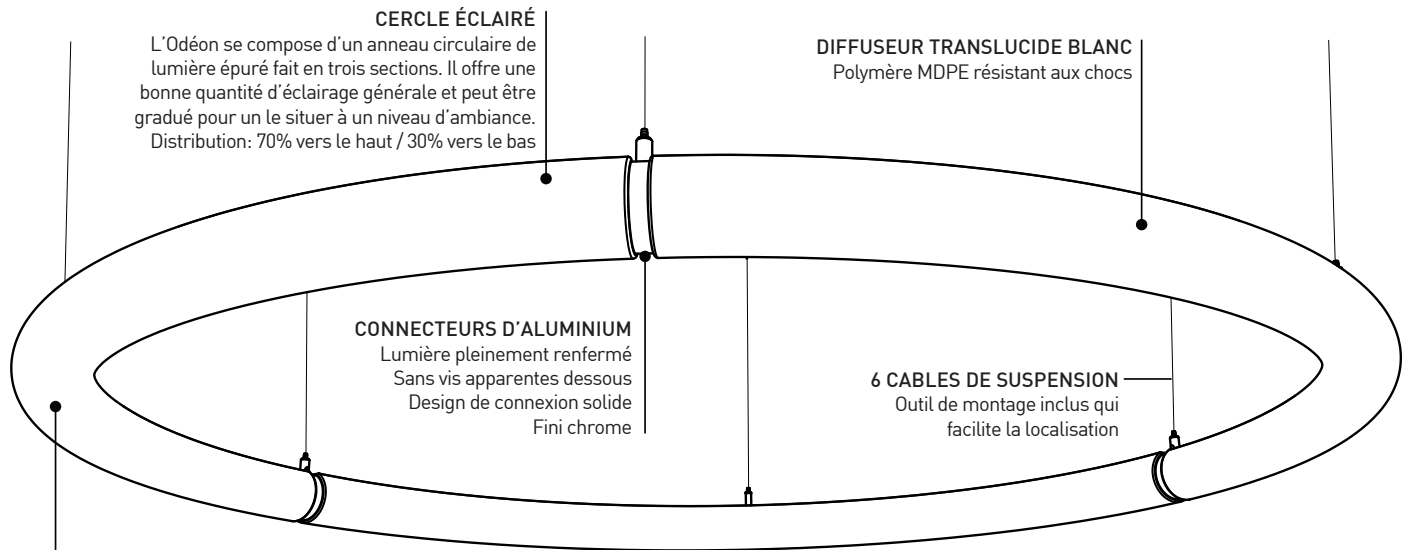


OPTIONS DE PAVILLON:

PAVILLON STANDARD
Odeon 80": Ø9.1" X 1.75" H
Odeon 118": Ø11" X 2.75" H
S'installe sur une boîte de connexion standard



PAVILLON MINCE (RDP)
Odeon 80/118: Ø9.4" X 0.25" H
Pilote encastré pour une installation discrète
S'installe sur: la boîte de jonction Eureka 3981D 6"x6"
Vendue & installé séparément avant le luminaire
Nécessite 6" de dégagement dans le plafond

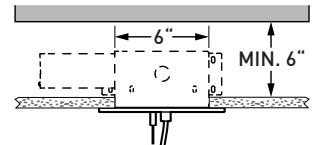


SPÉCIFICATION PRODUIT	4805 - 80	4805 - 118
PERFORMANCE		
PUISSANCE TOTALE	141 W	211.9 W
LUMENS RÉELS (4000K)	18502 LM	27900 LM
EFFICACITÉ	131.2 LM/W	131.6 LM/W
AUTRES INFORMATIONS		
POIDS PAR TÊTE	23.72 LBS / 10.78 KG	37.07 LBS / 16.85 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 H	> 60 000 H

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94

DISTRIBUTION LUMINEUSE

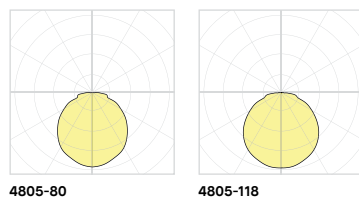

Visitez notre site Web pour les termes et conditions.