

SNOWLAB 2 DSNL4000-BFH-TCHR

PROJECT PROJET

SPEC TYPE

NOTES



OVERALL HEIGHT HAUTEUR HORS TOUT



LIGHT SOURCE	HAL TRACK 1 CIRCUIT	LED TRACK 1 CIRCUIT	HAL-LED	LED DIM
MOUNTING	2734	2734E	2401E	2403G
CABLE	70.20"	70.50"	69.20"	69.95"

MOUNTING OPTIONS OPTIONS DE MONTAGE

2734	2734E	2401E	2403G
3.85" x 2.03"	6.15" x 2.00"	Ø4.50" x 1.00"	Ø4.50" x 1.75"
98 x 52mm	156 x 51mm	Ø114 x 25mm	Ø114 x 44mm

* OVERALL HEIGHT DOES NOT INCLUDE TRACK THICKNESS

STEM OR CABLE OPTIONS OPTIONS DE TIGE OU CABLE

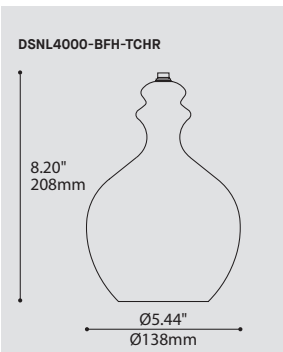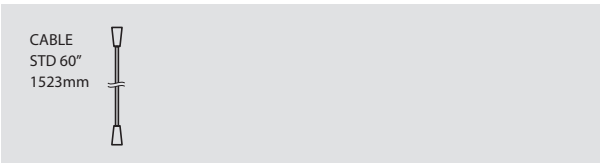

OPTIONS



UNLIT/ÉTEINT

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE **DSNL4000-BFH**

DSNL4000-BFH SNOWLAB 2

LIGHT SOURCE SOURCE LUMINEUSE

(WATTAGE, LAMP TYPE, LAMP FORM, BASE TYPE, OTHER INFO)

MR16C.50 50W, HAL, MR16C, GU5.3 BASE
LED.4 4W, LED

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

FOR LED ONLY

30 3000K
35 3500K
40 4000K

VOLTAGE VOLTAGE

120V 120 VOLT
277V* 277 VOLT
*NOT AVAILABLE WITH A TRACK ADAPTOR

DIMMING OPTION OPTION DE GRADATION

FOR LED ONLY

DV* 0-10V DIMMING (120-277V)
DP PHASE DIMMING (120V ONLY)
*NOT AVAILABLE WITH A TRACK ADAPTOR

CABLE CABLE

C CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CABLE

60 60" CABLE (STD LENGTH)
** CUSTOM CABLE LENGTH (PLEASE SPECIFY)
FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC ROUND CANOPY / PAVILLON ROND
FOR HAL & LED: 1" CANOPY (2401E)
FOR DIMMING LED: 1.50" CANOPY (2403G)

TA1 TRACK ADAPTOR / ADAPTEUR DE RAIL

1 CIRCUIT
HAL 120/12V ADAPTOR (2734)
LED DIMMING & NON-DIMMING 120V ADAPTOR (2734E)

TRACK ADAPTOR FINISH FINI ADAPTEUR DE RAIL(A)

WH WHITE
BLK BLACK
M G METALLIC GRAY (2734 ONLY)
(A) FILL IN IF A TRACK ADAPTOR IS SELECTED, OTHERWISE LEAVE EMPTY

STRUCTURE FINISH FINI STRUCTURE

WH WHITE*
*OTHER STRUCTURE FINISH THAN CANOPY IS ALWAYS CHROME

DIFFUSER FINISH FINI DIFFUSEUR

TCHR TRANSLUCENT CHROME

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM **DIM** **IES** **LED**

DESIGN: Designed by Snowlab, this modern interpretation of a traditional glass bell is a beautiful and subtle statement.

INSTALLATION: Easy to install and adjust custom clear silicone power cable.

LIGHT SOURCE: 4W LED in 3000K (Warm white) or 4000K (Neutral white) and MR16 halogen.

STRUCTURE: Die-cast steel structure with chrome plated finish.

DIFFUSER: Available in translucent chrome blown glass.

CERTIFIED: c-CSA-us

CONCEPTION: Interprétation moderne de Snowlab d'une cloche de verre traditionnelle apportant une belle touche de style subtile.

INSTALLATION: Facile à installer et à ajuster sur câble d'alimentation en silicone clair.

SOURCE LUMINEUSE: 4W DEL disponible en 3000K (blanc chaud) ou 4000K (blanc neutre), halogène MR16.

STRUCTURE: Acier embouti chromé.

DIFFUSEUR: Verre soufflé chrome translucide.

CERTIFIÉ: c-CSA-us