


ATOLL SQUARE & RECTANGLE - 3853 CEILING

PROJECT PROJCT
SPEC TYPE
NOTES



FINISH FINI

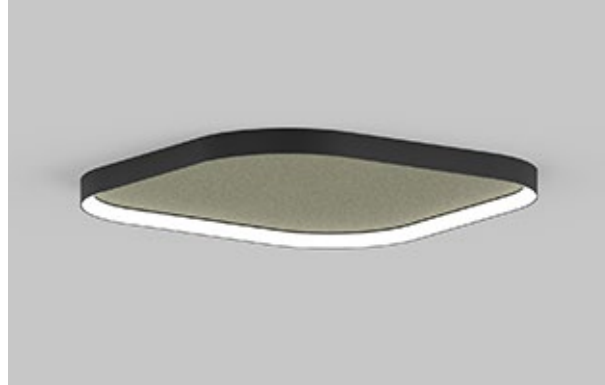

FAMILY FAMILLE



DRIVER OPTION OPTION DE PILOTE


RMP ACCESSORY
3981GC (IC), 3981GD (NON-IC)
DRIVER REMOTE BOX
12" x 16" x 4"
305mm x 406mm x 100mm

Refer to 3981G installation pages in installation guide for maximum distance between remote driver box and fixture.

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE	
MODEL MODÈLE			
3853-44X44	ATOLL ACOUSTIC 44" X 44"		
3853-44X62	ATOLL ACOUSTIC 44" X 62"		
3853-44X82	ATOLL ACOUSTIC 44" X 82"		
3853-44X100	ATOLL ACOUSTIC 44" X 100" (SECTIONAL PANELS)		
3853-44X120	ATOLL ACOUSTIC 44" X 120" (SECTIONAL PANELS)		
3853-62X62	ATOLL ACOUSTIC 62" X 62" (SECTIONAL PANELS)		
3853-62X82	ATOLL ACOUSTIC 62" X 82" (SECTIONAL PANELS)		
3853-62X100	ATOLL ACOUSTIC 62" X 100" (SECTIONAL PANELS)		
3853-62X120	ATOLL ACOUSTIC 62" X 120" (SECTIONAL PANELS)		
3853-82X82	ATOLL ACOUSTIC 82" X 82" (SECTIONAL PANELS)		
3853-82X100	ATOLL ACOUSTIC 82" X 100" (SECTIONAL PANELS)		
3853-82X120	ATOLL ACOUSTIC 82" X 120" (SECTIONAL PANELS)		
LIGHT SOURCE SOURCE LUMINEUSE			
LED	REGULAR OUTPUT		
LED.HO	HIGH OUTPUT		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR			
27	2700K		
30	3000K		
35	3500K		
40*	4000K		
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90	
90	90+ CRI		
VOLTAGE VOLTAGE			
120V	120 VOLT		
277V	277 VOLT		
CONTROL OPTION OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)		
DP*	PHASE DIMMING (120V ONLY)		
NLTAIR2**	NLIGHT AIR CONTROL GEN 2		
NLIGHT**	NLIGHT WIRED CONTROL		
*ONLY AVAILABLE REGULAR OUTPUT			
**CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY			
**NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE POWER PACK			
**NLIGHT AIR IS NOT AVAILABLE WITH RMP DRIVER POSITION			
**LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS			
EMERGENCY BATTERY BATTERIE D'URGENCE			
EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE 3981E FOR DETAILS			
EMB*	EMERGENCY BATTERY FOR REMOTE BOX		
* 3981EA ACCESSORY IS REQUIRED FOR THIS OPTION			
DRIVER POSITION POSITION DU PILOTE		RMP	
CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY			
RMP	REMOTE DRIVER (REQUIRES ACCESSORY 3981GX)		
CANOPY FINISH FINI PAVILLON			
BLKE	BLACK		
WHE	WHITE		
MATCH*	COLOR MATCH WITH RING FINISH		
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE			
FINISH FINI			
BLKE	BLACK	HGE*	HUNTER GREEN
WHE	WHITE	LNE*	LUNAR GREY
AYE*	APRICOT YELLOW	NBE*	NAVY BLUE
BRE*	BRICK RED	SBE*	SAND BEIGE
CBE*	CHOCOLATE BROWN	SGE*	SAGE GREY
CPE*	CLAY PINK	STE*	SUMMER TEAL
DBE*	DYNAMIC BLUE	RAL**	PLEASE SPECIFY RAL CODE
GGE*	GRASS GREEN		
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.			
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.			

ATOLL SQUARE & RECTANGLE - 3853 CEILING

FELT FINISH OPTIONS OPTIONS DE FINI FEUTRE

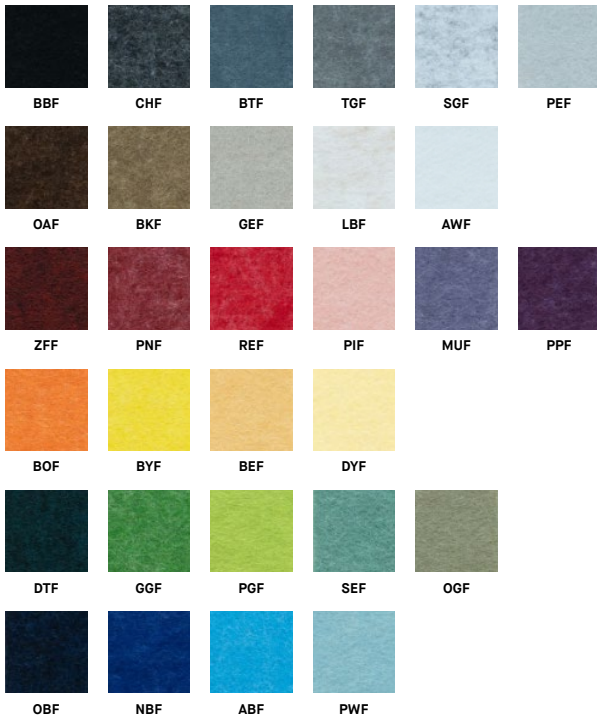

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

FELT FINISH FINI FEUTRE

BBF	BASIC BLACK	MUF	MYSTIC MULBERRY
CHF	CHARCOAL	PPF	PLUM PURPLE
BTF	BATTLESHIP	BOF	BLOOD ORANGE
TGF	TITANIUM GRAY	BYF	BANANA YELLOW
SGF	SILVER GRAY	BEF	BUTTERSCOTCH
PEF	PEBBLE GRAY	DYF	DAISY YELLOW
AWF	ARTIC WHITE	DTF	DEEP TEAL GREEN
OAF	OAK BROWN	GGF	GRASS GREEN
BKF	BARK BROWN	PGF	PEAR GREEN
GEF	GREIGE	SEF	SEAFOAM
LBF	LIGHT BEIGE	OGF	OLIVE GREEN
ZFF	ZINFANDEL	OBF	OCEAN BLUE
PNF	PINOT NOIR	NBF	NAVY BLUE
REF	RED	ABF	AZURE BLUE
PIF	PETAL PINK	PWF	POWDER BLUE

ACCESSORY ACCESSOIRE

CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY

3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 3.83" X 12" X 16"
3981GD1	1 NON-IC 120V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD2	1 NON-IC 277V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
39NLAA	NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA	NLIGHT WIRED REMOTE POWER PACK

ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE


3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
---------------	--

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ATOLL SQUARE & RECTANGLE - 3853 CEILING - TUNABLE WHITE


PROJECT PROJCT
SPEC TYPE
NOTES

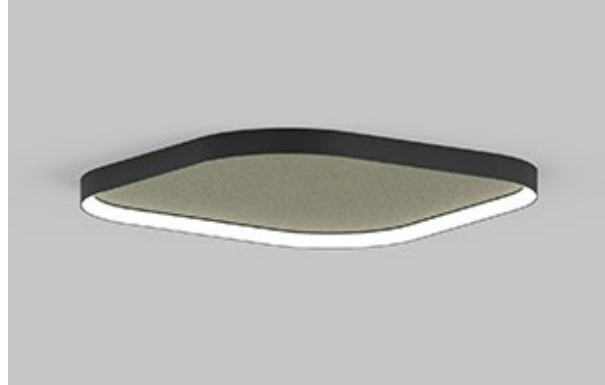


FINISH FINI



FAMILY FAMILLE

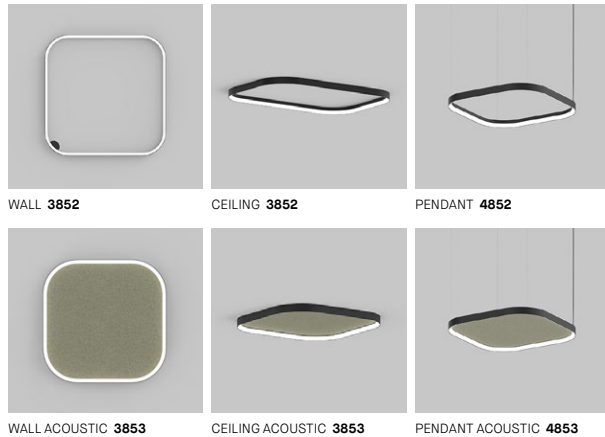

DRIVER OPTION OPTION DE PILOTE

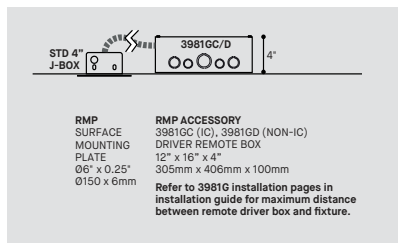

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

MODEL MODÈLE		CODE
3853-44X44	ATOLL ACOUSTIC 44" X 44"	
3853-44X62	ATOLL ACOUSTIC 44" X 62"	
3853-44X82	ATOLL ACOUSTIC 44" X 82"	
3853-44X100	ATOLL ACOUSTIC 44" X 100" (SECTIONAL PANELS)	
3853-44X120	ATOLL ACOUSTIC 44" X 120" (SECTIONAL PANELS)	
3853-62X62	ATOLL ACOUSTIC 62" X 62" (SECTIONAL PANELS)	
3853-62X82	ATOLL ACOUSTIC 62" X 82" (SECTIONAL PANELS)	
3853-62X100	ATOLL ACOUSTIC 62" X 100" (SECTIONAL PANELS)	
3853-62X120	ATOLL ACOUSTIC 62" X 120" (SECTIONAL PANELS)	
3853-82X82	ATOLL ACOUSTIC 82" X 82" (SECTIONAL PANELS)	
3853-82X100	ATOLL ACOUSTIC 82" X 100" (SECTIONAL PANELS)	
3853-82X120	ATOLL ACOUSTIC 82" X 120" (SECTIONAL PANELS)	

LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		TW
TW*	TUNABLE WHITE (2700K TO 5000K) *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80+ CRI	

VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	

CONTROL OPTION OPTION DE CONTRÔLE		
DDV	DUAL 0-10V DIMMING	
NLT*	NIGHT NTUNE CONTROL (NOT AVAILABLE FOR HO OUTPUT) *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE *REFER TO NIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS	

DRIVER POSITION POSITION DU PILOTE		RMP
RMP	REMOTE DRIVER (REQUIRES ACCESSORY 3981GX)	

CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY

CANOPY FINISH FINI PAVILLON		
BLKE	BLACK	
WHE	WHITE	
MATCH*	COLOR MATCH WITH RING FINISH * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

FINISH FINI			
BLKE	BLACK	HGE*	HUNTER GREEN
WHE	WHITE	LNE*	LUNAR GREY
AYE*	APRICOT YELLOW	NBE*	NAVY BLUE
BRE*	BRICK RED	SBE*	SAND BEIGE
CBE*	CHOCOLATE BROWN	SGE*	SAGE GREY
CPE*	CLAY PINK	STE*	SUMMER TEAL
DBE*	DYNAMIC BLUE	RAL**	PLEASE SPECIFY RAL CODE
GGE*	GRASS GREEN		

* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

FELT FINISH FINI FEUTRE			
BBF	BASIC BLACK	MUF	MYSTIC MULBERRY
CHF	CHARCOAL	PPF	PLUM PURPLE
BTF	BATTLESHIP	BOF	BLOOD ORANGE
TGF	TITANIUM GRAY	BYF	BANANA YELLOW
SGF	SILVER GRAY	BEF	BUTTERSOTCH
PEF	PEBBLE GRAY	DYF	DAISY YELLOW
AWF	ARTIC WHITE	DTF	DEEP TEAL GREEN
OAF	OAK BROWN	GGF	GRASS GREEN
BKF	BARK BROWN	PGF	PEAR GREEN
GEF	GREIGE	SEF	SEAFOAM
LBF	LIGHT BEIGE	OGF	OLIVE GREEN
ZFF	ZINFANDEL	OBF	OCEAN BLUE
PNF	PINOT NOIR	NBF	NAVY BLUE
REF	RED	ABF	AZURE BLUE
PIF	PETAL PINK	PWF	POWDER BLUE

ACCESSORY ACCESSOIRE		
3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 3.83" X 12" X 16"	
3981GD1	1 NON-IC 120V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"	
3981GD2	1 NON-IC 277V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"	




SPECIFICATION

ATOLL - 3853/4853 - DIMENSIONS

HEIGHT OF THE PROFILE : 3" / 74mm

WIDTH OF THE PROFILE : 1.4" / 35mm

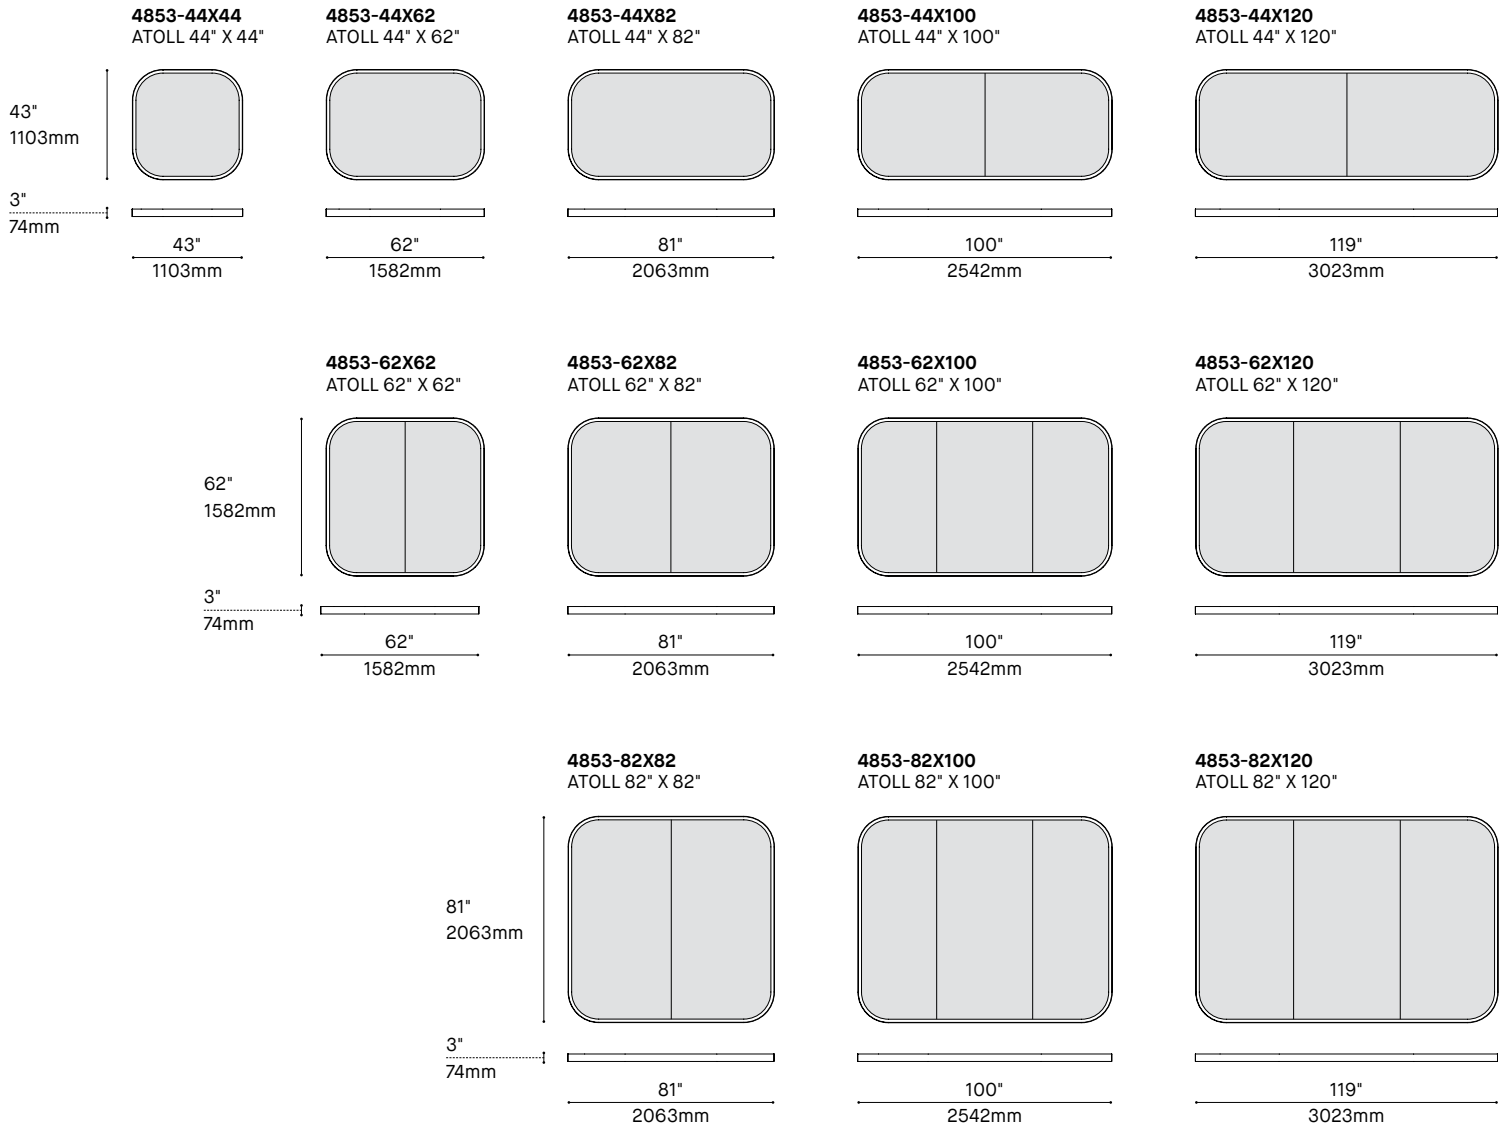

Acoustic Material Color Options



BBF
Basic Black



CHF
Charcoal



BTF
Battleship




TGF
Titanium Gray




SGF
Silver Gray



PEF
Pebble Gray



AWF
Artic White



OAF
Oak Brown



BKF
Bark Brown




GEF
Greige



LBF
Light Beige




ZFF
Zinfandel



PNF
Pinot Noir




REF
Red



PIF
Petal Pink




MUF
Mystic Mulberry




PPF
Plum Purple




BOF
Blood Orange




BYF
Banana Yellow




BEF
Butterscotch




DYF
Daisy Yellow



DTF
Deep Teal Green




GGF
Grass Green




PGF
Pear Green



SEF
Seafoam



OGF
Olive Green



OBF
Ocean Blue



NBF
Navy Blue



ABF
Azure Blue








PWF
Powder Blue

ATOLL - 4852 DIRECT, 3852/3853 SURFACE : CANOPY COMPATIBILITY CHART

DD : DUAL 0-10V DIMMING CONTROL FOR TUNABLE WHITE
 NT : NTUNE WIRELESS CONTROL FOR TUNABLE WHITE
 DP : PHASE DIMMING

BLANK SPACE = NOT AVAILABLE
 HO-REG OR REG-HO ARE EQUIVALENT IN THE CHART BELOW
 IC / NON-IC : NON-IC REMOTE BOXES CANNOT BE IN CONTACT WITHIN 3" OF INSULATION

 FIXTURE	PHASE DIMMING OPTION	CANOPY								
		RC1	RC2	RC3			RC5 (RMP)			
		 RC1 Ø5.50" x 1.35" Ø140 x 34.3mm*	 RC2 - WIRED / AIR Ø7.75" x 1.30" Ø196.9 x 33mm*	 RC3 - STD RC3 - WIRED / AIR Ø9.4" x 1.88" Ø238.8 x 47.8mm*			 RC5 (RMP) 247IC Ø4.5" x 0.5" Ø114 x 13mm		RC5 (RMP) ACCESSORY 3981GC (IC), 3981GD (NON-IC) DRIVER REMOTE BOX 12" x 16" x 4" 305mm x 406mm x 100mm	
COMPATIBILITY						FOR REMOTE LOCATION OR CAN BE REQUIRED TO FIT HIGHER POWER OR NLIGHT IF NOT AVAILABLE IN RC1,2,3,4		NLIGHT WIRED	TUNABLE WHITE	
DIMENSIONS D = DIRECT, I = INDIRECT ILLUMINANCE : REG OR HO		STANDARD COMPACT CANOPY	NLIGHT WIRED OR AIR COMPACT CANOPY	STD HIGHER POWER	TUNABLE WHITE	NLIGHT WIRED OR AIR				
44X44 D - REG	DP	✓	✓		DD+NT		3981GC	✓	DD/NT	
44X44 D - HO				✓	DD		3981GC	✓	DD	
44X62 D - REG	DP	✓	✓		DD+NT		3981GC	✓	DD/NT	
44X62 D - HO				✓	DD		3981GC	✓	DD	
44X81 D - REG	DP			✓	DD+NT	✓	3981GC	✓	DD/NT	
44X81 D - HO	DP			✓	DD	✓	3981GC	✓	DD	
44X100 D - REG				✓	DD+NT		3981GC	✓	DD/NT	
44X100 D - HO				✓	DD		3981GC	✓	DD	
44X120 D - REG				✓	DD+NT		3981GC	✓	DD/NT	
44X120 D - HO				✓	DD		3981GC	✓	DD	
62X62 D - REG	DP			✓	DD+NT	✓	3981GC	✓	DD/NT	
62X62 D - HO	DP			✓	DD	✓	3981GC	✓	DD	
62X81 D - REG				✓	DD+NT		3981GC	✓	DD/NT	
62X81 D - HO				✓	DD		3981GC	✓	DD	
62X100 D - REG				✓	DD+NT		3981GC	✓	DD/NT	
62X100 D - HO				✓	DD		3981GC	✓	DD	
62X120 D - REG				✓	DD		3981GC	✓	DD	
62X120 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		
81X81 D - REG				✓	DD+NT		3981GC	✓	DD/NT	
81X81 D - HO				✓	DDV		3981GC	✓	DD	
81X100 D - REG				✓	DD		3981GC	✓	DD	
81X100 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		
81X120 D - REG				✓	DD		3981GC	✓	DD	
81X120 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		
100X100 D - REG				✓	DD		3981GC	✓	DD	
100X100 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		
100X120 D - REG				✓	DD		3981GC	✓	DD	
100X120 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		
120X120 D - REG				✓	DD		3981GC	✓	DD	
120X120 D - HO				✓			NON-IC : 3981GD1 (120V) / 3981GD2 (277V)	✓		