


MIKA COLORS & GRADIENT- 4230C/D

PROJECT PROJCT

SPEC TYPE


NOTES

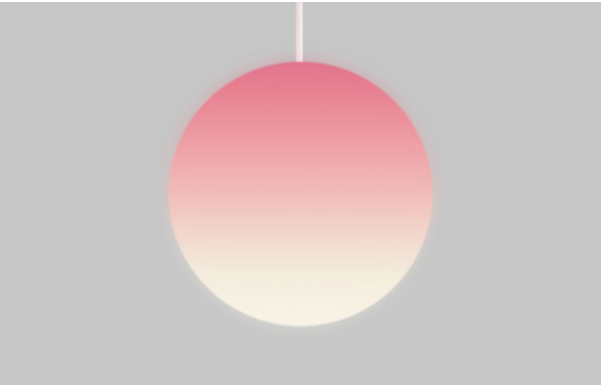

OPTIONS





4230D-12 4230D-16 4230D-20

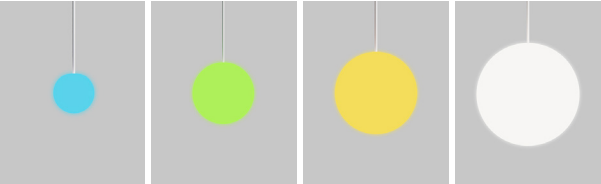

4230C-8 4230C-12 4230C-16 4230C-20

MOUNTING OPTION OPTION DE MONTAGE

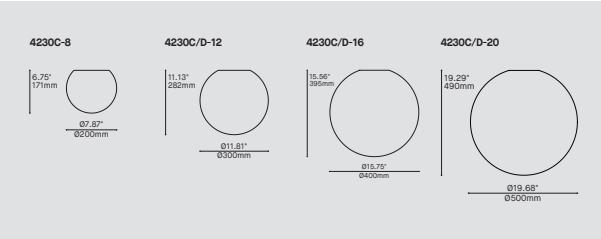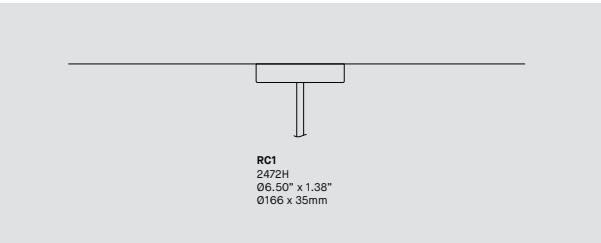




ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		
4230C-8	MIKA 8" RGBW	
4230C-12	MIKA 12" RGBW	
4230C-16	MIKA 16" RGBW	
4230C-20	MIKA 20" RGBW	
4230D-12	MIKA 12" GRADIANT	
4230D-16	MIKA 16" GRADIANT	
4230D-20	MIKA 20" GRADIANT	
LIGHT SOURCE SOURCE LUMINEUSE		LED.REG
LED.REG	REGULAR OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		RGBW
RGBW	RGBW (3500K)	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		DMX
DMX	DMX CONTROLLER	
STEM TIGE		S13
S13	WHITE 1/4" IPS (13MM) STEM, NOT FIELD ADJUSTABLE	
STEM LENGTH LONGUEUR DE TIGE		
36	36" STEM (STD LENGTH)	
**	CUSTOM STEM LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING OPTIONS OPTIONS DE MONTAGE		RC
RC	SCREWLESS CANOPY 06.5" X 1.35" (2472H)	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
STEM FINISH FINI TIGE		
WHE	WHITE STEM	
RAL*	PLEASE SPECIFY RAL CODE FOR STEM * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN: A classic round frosted globe with uniform illumination. Available with RGBW for 8", 12", 16" and 20" diameters and with Gradient effect for 12", 16" & 20" diameters.
- INSTALLATION: Mika is easily installed with minimal hardware.
- LIGHT SOURCE: A high-performance RGBW module mounted on a custom aluminum heatsink unlocks new color possibilities. The Gradient version incorporates two independently controlled RGBW light engines, allowing unique color compositions across the globe's upper and lower hemispheres.
- CONSTRUCTION: Translucent white diffuser made from impact-resistant rotomolded MDPE.

MIKA GRADIENT - 4230D

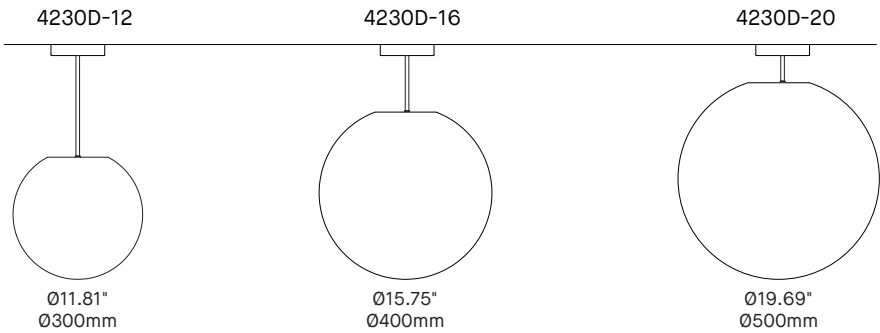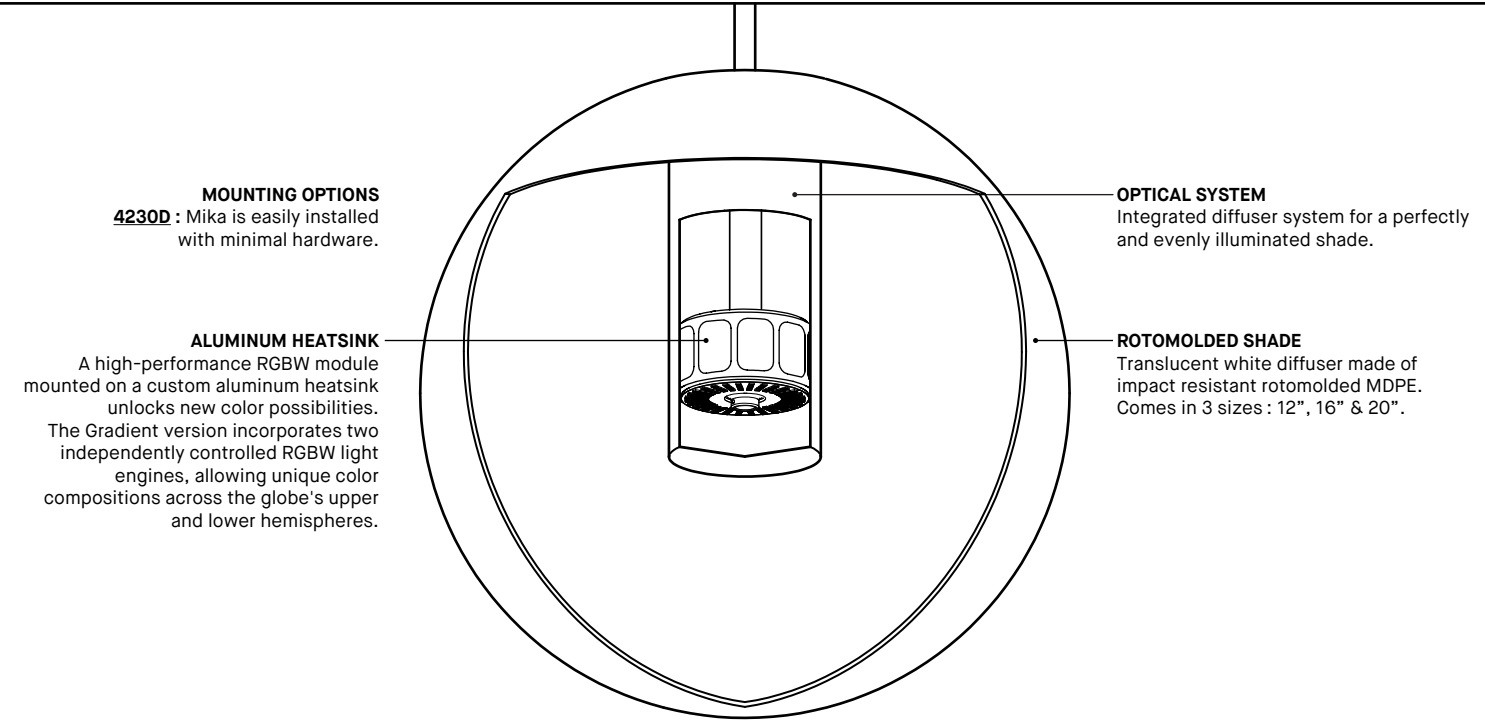


PRODUCT SPECIFICATION	4230D-12	4230D-16	4230D-20
PERFORMANCE	RED — GREEN — BLUE — WHITE — RGBW	RED — GREEN — BLUE — WHITE — RGBW	RED — GREEN — BLUE — WHITE — RGBW
SYSTEM WATTAGE	2.8 — 3.4 — 2.4 — 3.6 — 8.9 W	4.7 — 5.8 — 3.6 — 6.2 — 11.1 W	8.5 — 10.7 — 6.0 — 11.4 — 13.0 W
DELIVERED LUMENS (3500K)	183 — 415 — 85 — 714 — 1208 LM	305 — 707 — 127 — 1208 — 1510 LM	555 — 1298 — 212 — 2248 — 1775 LM
RADIANT WATT EFFICACY	1.01 — 0.82 — 0.93 — 2.12 — 4.03 W	1.68 — 1.40 — 1.40 — 3.58 — 5.04 W	3.07 — 2.56 — 2.33 — 6.67 — 5.92 W
	98 LM/W	98 LM/W	98 LM/W
OTHER INFORMATIONS			
WEIGHT	2.9LBS / 1.3KG	6.9LBS / 3.1KG	8.1LBS / 3.7KG
L70 (LUMEN MAINTENANCE)	> 55 000 HRS	> 55 000 HRS	> 55 000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.03
90+	3500K	1.00
90+	3000K	0.98
90+	2700K	0.93



LIGHT DISTRIBUTION



4230D



MIKA GRADIENT - 4230D

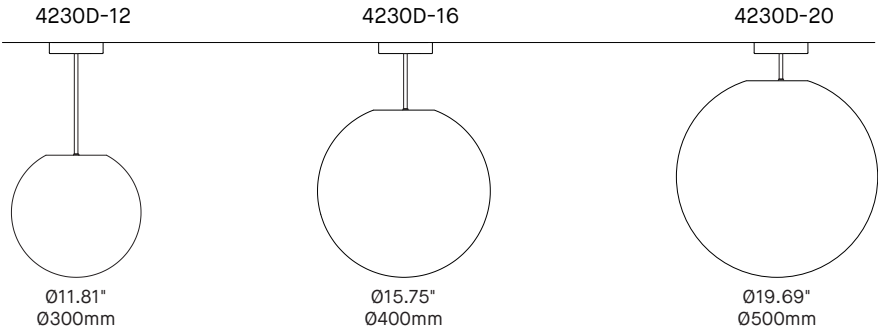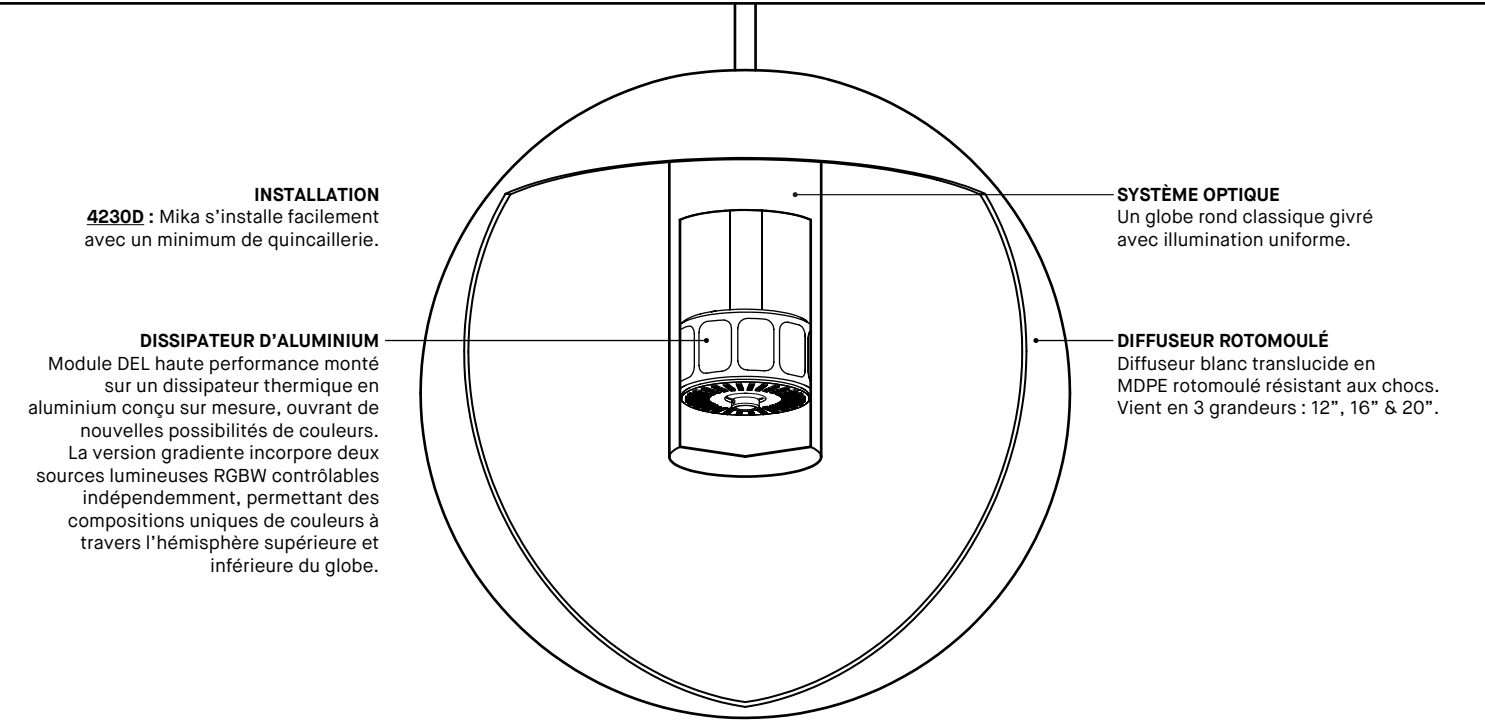


SPÉCIFICATION PRODUIT	4230D-12	4230D-16	4230D-20
PERFORMANCE	ROUGE — VERT — BLEU — BLANC — RVBB	ROUGE — VERT — BLEU — BLANC — RVBB	ROUGE — VERT — BLEU — BLANC — RVBB
PUISSANCE TOTALE	2.8 — 3.4 — 2.4 — 3.6 — 8.9 W	4.7 — 5.8 — 3.6 — 6.2 — 11.1 W	8.5 — 10.7 — 6.0 — 11.4 — 13.0 W
LUMENS RÉELS (3500K)	183 — 415 — 85 — 714 — 1208 LM	305 — 707 — 127 — 1208 — 1510 LM	555 — 1298 — 212 — 2248 — 1775 LM
RADIANT WATT	1.01 — 0.82 — 0.93 — 2.12 — 4.03 W	1.68 — 1.40 — 1.40 — 3.58 — 5.04 W	3.07 — 2.56 — 2.33 — 6.67 — 5.92 W
EFFICACITÉ	98 LM/W	98 LM/W	98 LM/W
AUTRES INFORMATIONS			
POIDS	2.9LBS / 1.3KG	6.9LBS / 3.1KG	8.1LBS / 3.7KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 55 000 HRS	> 55 000 HRS	> 55 000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.03
90+	3500K	1.00
90+	3000K	0.98
90+	2700K	0.93

DISTRIBUTION LUMINEUSE



4230D



Visitez notre site Web pour les termes et conditions.