


# MILL Ø36" SUSPENDED

PROJECT PROJÉT
SPEC TYPE
NOTES



## POWER CORD FINISH FINI CÂBLE D'ALIMENTATION


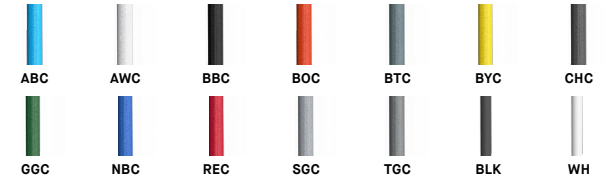


## SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

## MOUNTING OPTIONS OPTIONS DE MONTAGE

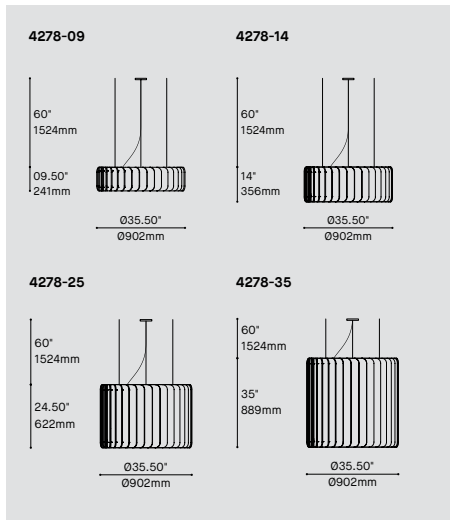

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
<b>MODEL</b> MODÈLE					
4278D-09	MILL 9.5" (DIRECT)				
4278D-14	MILL 14" (DIRECT)				
4278D-25	MILL 25" (DIRECT)				
4278D-35	MILL 35" (DIRECT)				
4278DI-09	MILL 9.5" (DIRECT + INDIRECT)				
4278DI-14	MILL 14" (DIRECT + INDIRECT)				
4278DI-25	MILL 25" (DIRECT + INDIRECT)				
4278DI-35	MILL 35" (DIRECT + INDIRECT)				
<b>LIGHT SOURCE</b> SOURCE LUMINEUSE					
4278D-XX					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4278DI-XX					
LED.LO.REG	LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
<b>COLOR TEMPERATURE</b> TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
<b>COLOR RENDERING INDEX (CRI)</b> INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
<b>VOLTAGE</b> VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
<b>CONTROL OPTION</b> OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).				
	* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
	* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
<b>EMERGENCY BATTERY</b> BATTERIE D'URGENCE					
	APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.				
	CLEAR POWER CABLE ONLY AVAILABLE FOR EMB OPTION.				
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
	* 3981EA ACCESSORY IS REQUIRED				
<b>CABLE</b> CÂBLE		AC			
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
<b>CABLE LENGTH</b> LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
<b>MOUNTING</b> MONTAGE		RC1			
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
<b>MOUNTING CABLE OPTION</b> OPTION DE MONTAGE DE CÂBLE		RCC			
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
<b>CANOPY FINISH</b> FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
<b>POWER CORD FINISH</b> FINI CÂBLE D'ALIMENTATION					
BLK	BLACK VINYL	BOC*	BLOOD ORANGE	NBC*	NAVY BLUE
WH	WHITE VINYL	BTC*	BATTLESHIP GRAY	REC*	RED
ABC*	AZURE BLUE	BYC*	BANANA YELLOW	SGC*	SILVER GRAY
AWC*	ARCTIC WHITE	CHC*	CHARCOAL	TGC*	TITANIUM GRAY
BBC*	BASIC BLACK	GGC*	GRASS GREEN	CLR**	CLEAR
	* TEXTILE BRAIDED CORD, ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
	** ONLY OPTION AVAILABLE WITH EMERGENCY OPTION.				
<b>SHADE FINISH</b> FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	FELT ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
<b>PREMIUM*</b>	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				



## SPECIFICATION

<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		<b>WH</b>
<b>WH</b>	WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
<b>39NLAA*</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK	
<b>39NLWA*</b>	NLIGHT WIRED REMOTE POWER PACK	
	* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .	
<b>EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE</b>		
<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




<b>DESIGN:</b>	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its four different diameters, four different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
<b>INSTALLATION:</b>	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
<b>LIGHT SOURCE:</b>	This pendant offers powerful and evenly diffused lighting with a COB light source. Phase or 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
<b>SHADE:</b>	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

# MILL Ø36" SUSPENDED

PROJECT PROJÉT
SPEC TYPE
NOTES



## POWER CORD FINISH FINI CÂBLE D'ALIMENTATION


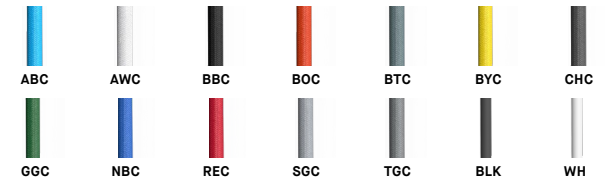


## SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

## MOUNTING OPTIONS OPTIONS DE MONTAGE

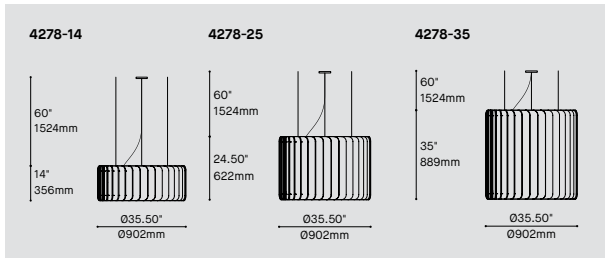

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

### MODEL MODÈLE

- 4278D-14 MILL 14" (DIRECT)
- 4278D-25 MILL 25" (DIRECT)
- 4278D-35 MILL 35" (DIRECT)
- 4278DI-14 MILL 14" (DIRECT + INDIRECT)
- 4278DI-25 MILL 25" (DIRECT + INDIRECT)
- 4278DI-35 MILL 35" (DIRECT + INDIRECT)

### LIGHT SOURCE SOURCE LUMINEUSE

- 4278D-XX
- LED.LO LOW OUTPUT
  - LED REGULAR OUTPUT
  - LED.HO HIGH OUTPUT

### 4278DI-XX

- LED.LO.REG LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT
- LED.LO.HO LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT
- LED.REG.REG REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT
- LED.REG.HO REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT
- LED.HO.REG HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT
- LED.HO.HO HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT

### COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

- 27\* 2700K
- 30 3000K
- 35 3500K
- 40 4000K

\* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

- 90 90+ CRI

90

### VOLTAGE VOLTAGE

- 120V 120 VOLT
- 277V 277 VOLT

### CONTROL OPTION OPTION DE CONTRÔLE

- DV 0-10V DIMMING (120V-277V)
- NLTAIR2\* NLIGHT AIR CONTROL GEN 2
- NLIGHT\* NLIGHT WIRED CONTROL

\* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).

\* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS

\* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

### EMERGENCY BATTERY BATTERIE D'URGENCE

APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS. CLEAR POWER CABLE ONLY AVAILABLE FOR EMB OPTION.

- EMB\* EMERGENCY BATTERY FOR REMOTE BOX

\* 3981EA ACCESSORY IS REQUIRED

### CABLE CÂBLE

- AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

AC

### CABLE LENGTH LONGUEUR DE CÂBLE

- 60 60" AIRCRAFT CABLE (STD LENGTH)
- \*\* CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

### MOUNTING MONTAGE

- RC1 ROUND CANOPY / PAVILLON ROND
- SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)

RC1

### MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

- RCC CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES

RCC

### CANOPY FINISH FINI PAVILLON

- BLKE BLACK FINE TEXTURE
- WHE WHITE FINE TEXTURE

### POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

- |                   |                      |                    |
|-------------------|----------------------|--------------------|
| BLK BLACK VINYL   | BOC* BLOOD ORANGE    | NBC* NAVY BLUE     |
| WH WHITE VINYL    | BTC* BATTLESHIP GRAY | REC* RED           |
| ABC* AZURE BLUE   | BYC* BANANA YELLOW   | SGC* SILVER GRAY   |
| AWC* ARCTIC WHITE | CHC* CHARCOAL        | TGC* TITANIUM GRAY |
| BBC* BASIC BLACK  | GGC* GRASS GREEN     | CLR** CLEAR        |

\* TEXTILE BRAIDED CORD, ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

\*\* ONLY OPTION AVAILABLE WITH EMERGENCY OPTION.

### SHADE FINISH FINI ABAT-JOUR

- |                          |                        |                      |
|--------------------------|------------------------|----------------------|
| ABF AZURE BLUE FELT      | BYF BANANA YELLOW FELT | REF RED FELT         |
| AWF ARCTIC WHITE FELT    | CHF CHARCOAL FELT      | SGF SILVER GRAY FELT |
| BBF BASIC BLACK FELT     | NBF NAVY BLUE FELT     | TGF TITANIUM GRAY    |
| BOF BLOOD ORANGE FELT    | OBF OCEAN BLUE FELT    | ZFF FELT ZINFANDEL   |
| BTF BATTLESHIP GRAY FELT | PGF PEAR GREEN FELT    | FELT                 |

PREMIUM\* PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

\* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE



SPECIFICATION

<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		<b>WH</b>
<b>WH</b>	WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
<b>39NLAA*</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK	
<b>39NLWA*</b>	NLIGHT WIRED REMOTE POWER PACK	
	* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .	
<b>EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE</b>		
<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

**PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT**



- DESIGN:** MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
- INSTALLATION:** Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
- LIGHT SOURCE:** This pendant offers powerful and evenly diffused lighting with a COB light source. Phase or 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
- SHADE:** The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

# MILL Ø36" SUSPENDED

QUICKSHIP

PROJECT PROJET

SPEC TYPE



NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE

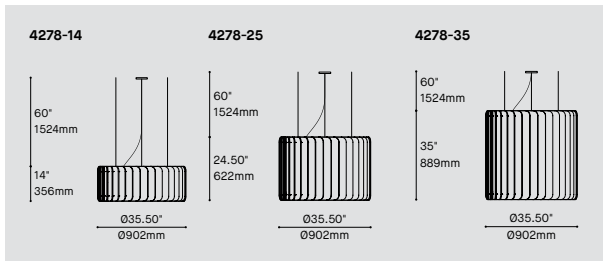

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS10 QUICKSHIP 10 DAYS - MAXIMUM 5 UNITS QUICKSHIP 10 JOURS - MAXIMUM 5 UNITÉS

MODEL MODÈLE

4278D-14 MILL 14" (DIRECT)  
4278D-25 MILL 25" (DIRECT)  
4278D-35 MILL 35" (DIRECT)  
4278DI-14 MILL 14" (DIRECT + INDIRECT)  
4278DI-25 MILL 25" (DIRECT + INDIRECT)  
4278DI-35 MILL 35" (DIRECT + INDIRECT)

LIGHT SOURCE SOURCE LUMINEUSE

4278D-XX  
LED.LO LOW OUTPUT  
LED REGULAR OUTPUT  
LED.HO HIGH OUTPUT

4278DI-XX

LED.LO.REG LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT  
LED.LO.HO LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT  
LED.REG.REG REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT  
LED.REG.HO REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT  
LED.HO.REG HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT  
LED.HO.HO HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K  
35 3500K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

90

VOLTAGE VOLTAGE

120V 120 VOLT  
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)

DV

CABLE CÂBLE

AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

AC

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)  
\*\* CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)  
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1

RC1 ROUND CANOPY / PAVILLON ROND  
SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RCC

RCC CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE  
WHE WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK BLACK POWER CORD  
WH WHITE POWER CORD

SHADE FINISH FINI ABAT-JOUR

ABF AZURE BLUE FELT BYF BANANA YELLOW FELT REF RED FELT  
AWF ARCTIC WHITE FELT CHF CHARCOAL FELT SGF SILVER GRAY FELT  
BBF BASIC BLACK FELT NBF NAVY BLUE FELT TGF TITANIUM GRAY FELT  
BOF BLOOD ORANGE FELT OBF OCEAN BLUE FELT ZFF ZINFANDEL FELT  
BTF BATTLESHIP GRAY FELT PGF PEAR GREEN FELT

DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



# Acoustic Material Color Options for Mill




## Standard colors



**ABF**  
Azure Blue




**AWF**  
Arctic White



**BBF**  
Basic Black



**BOF**  
Blood Orange




**BTF**  
Battleship Gray




**BYF**  
Banana Yellow




**CHF**  
Charcoal



**NBF**  
Navy Blue



**OBF**  
Ocean Blue



**PGF**  
Pear Green




**REF**  
Red



**SGF**  
Silver Gray



**TGF**  
Titanium Gray



**ZFF**  
Zinfandel


## Premium colors




**BGF**  
Bubble Gum



**BKF**  
Bark Brown



**DBF**  
Denim Blue



**DTF**  
Deep Teal Green




**DYF**  
Daisy Yellow




**GGF**  
Grass Green




**LBF**  
Light Beige



**LGF**  
Lime Green



**MGF**  
Moss Green




**OAF**  
Oak Brown



**PBF**  
Peanut Brown



**PNF**  
Pinot Noir



**PPF**  
Plum Purple



**SBF**  
Sky Blue




**TOF**  
Tangerine Orange



**TPF**  
Tulip Purple

- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.

# Cable Color Options for Mill

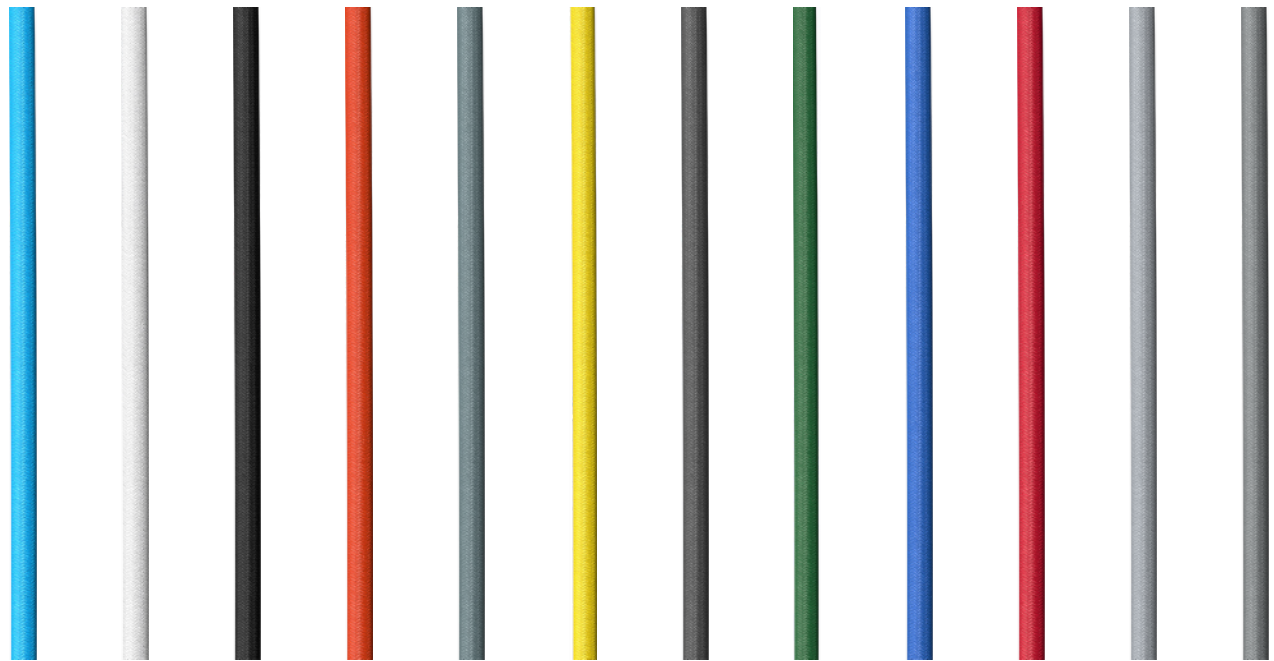


<b>ABC</b> Azure Blue	<b>AWC</b> Arctic White	<b>BBC</b> Basic Black	<b>BOC</b> Blood Orange	<b>BTC</b> Battleship Gray	<b>BYC</b> Banana Yellow	<b>CHC</b> Charcoal	<b>GGC</b> Grass Green	<b>NBC</b> Navy Blue	<b>REC</b> Red	<b>SGC</b> Silver Gray	<b>TGC</b> Titanium Gray
-----------------------------	-------------------------------	------------------------------	-------------------------------	----------------------------------	--------------------------------	------------------------	------------------------------	----------------------------	-------------------	------------------------------	--------------------------------

The cable has a  $\varnothing 0.265$ in (direct) or  $\varnothing 0.375$ in (direct+indirect) and is covered with a decorative braided sleeve.


- Longer lead time may apply.
- Colors shown for visual reference only.
- Due to the dye process, colors may vary slightly from batch to batch.
- Consult your sales representative or factory to get a sample.
- Not available with Emergency Battery option.

# MILL Ø36" / Ø47"

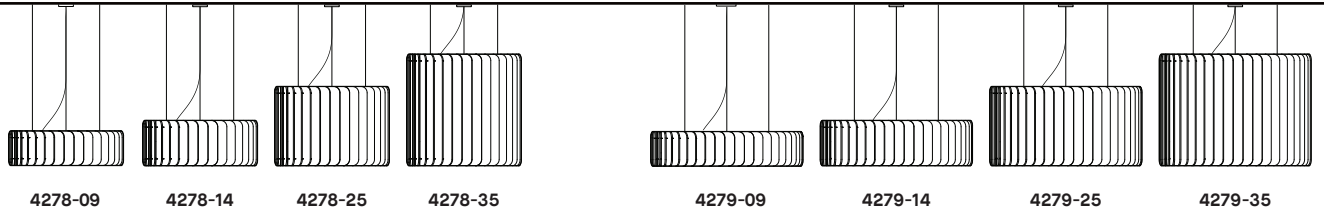

**TWO MOUNTING OPTIONS**  
The fixture can be suspended or surface mounted depending of the space needs.

**CANOPY POSITION**



**RECYCLED PANELS**

Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.





**FLEXIBLE ENGINES**

LOW, REG and HIGH output light engine allows for a wide range of applications.



**NOISE REDUCTION**

The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire. The panels are available in 30 colors. For all color options, refer to the Acoustic Material Color Options page.

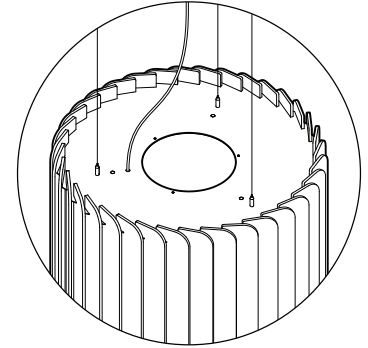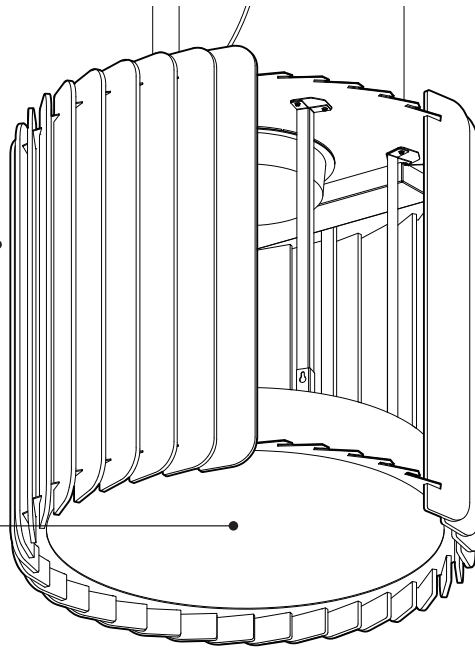

**427X-DI**

**TRUE UPLIGHT**

The suspended version offers an optional second light source with great uplight performance. Both light sources can be dimmed separately. We recommend a minimum suspension of 22" for a diffused uplight.

**CLEANING**

A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do not use any abrasive, soap, or chemical cleaner.

**PRODUCT SPECIFICATION**

**Ø36" DIRECT**

**Ø47" DIRECT**


**Ø36"/ Ø47" INDIRECT**

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
SYSTEM WATTAGE	56W	82W	121W	128W	185W	276W	19W	29W
DELIVERED LUMENS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
<b>OTHER INFORMATION</b>								
WEIGHT	40LBS / 18KG			60LBS / 27KG				
L70 (LUMEN MAINTENANCE)	60,000			54,700				
<b>WELL &amp; LEED STANDARD REQUIREMENTS</b>								
MAX. LUMINANCE 45°-90° OF NADIR	1 150 CD/M <sup>2</sup> (AT HO)							
LIGHT QUALITY	R9 > 50 (WITH 4000K)							

**EFFICACY MULTIPLIERS**

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

**LIGHT DISTRIBUTION**

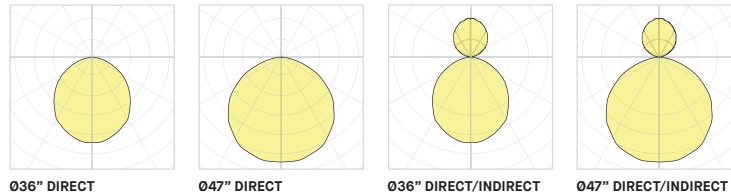


Visit our website for warranty terms and conditions.



**TECHNICAL DATA**





# MILL 036" / 047"

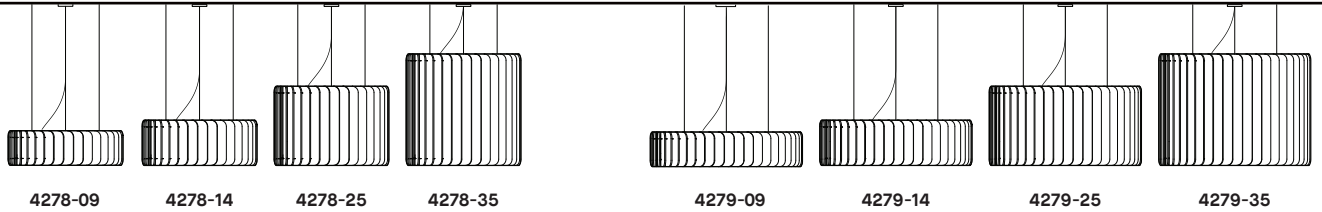

## DEUX OPTIONS DE MONTAGE

Le luminaire peut être suspendu ou monté en surface selon les besoins de l'espace.

## POSITION CANOPY



RCC

## PANNEAUX RECYCLÉS

Panneaux composés de fibres de polyester (PET) avec 42% de matière recyclées. 100% recyclable, non-toxique, non-allergène et non-irritable. Faible teneur en COV et résistance au feu.





## SOURCES POLYVALENTES

Source LOW, REG et HO permettent une grande variété d'applications.



## ATTÉNUATION DU BRUIT

La superposition des panneaux verticaux augmente la surface effective du matériel insonorisant, optimisant les performances acoustiques du luminaire. Les panneaux sont disponibles en 30 couleurs. Pour toutes options de couleurs, consulter la page d'options de couleurs de matérielle acoustique.

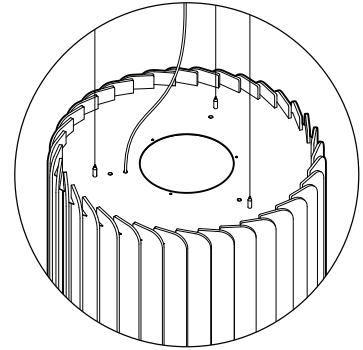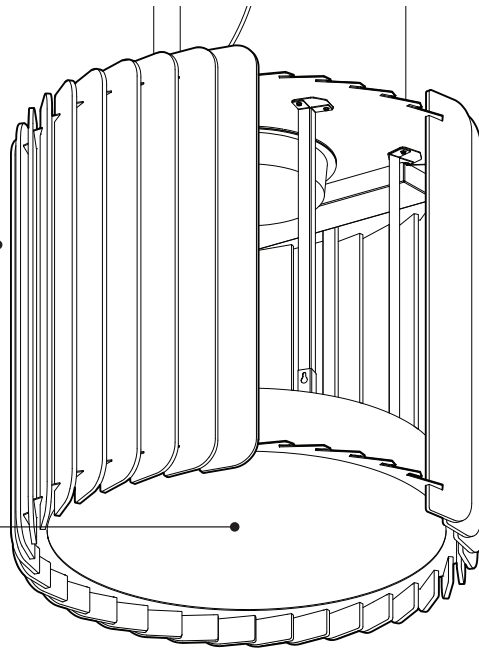

## 427X-DI

## SOURCE INDIRECTE PUISSANTE

La version suspension offre en option une seconde source lumineuse pour offrir un éclairage indirect performant. Les deux sources peuvent se régler séparément. Nous recommandons une suspension minimum de 22" pour avoir une lumière indirecte diffuse.

## NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Un nettoyage périodique peut être fait avec un aspirateur ou en essuyant avec un chiffon humide. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

## SPÉCIFICATION PRODUIT

### 036" DIRECT

### 047" DIRECT


### 036"/047" INDIRECT

PERFORMANCE	LO	REG	HO	LO	REG	HO	REG	HO
PUISSANCE TOTALE	56W	82W	121W	128W	185W	276W	19W	29W
LUMENS RÉELS (4000K)	3955 LM	5390 LM	7424 LM	8784 LM	11971 LM	16489 LM	1408 LM	2051 LM
<b>AUTRES INFORMATION</b>								
POIDS	40LBS / 18KG			60LBS / 27KG				
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000			54,700				
<b>CRITÈRES DE CERTIFICATION WELL</b>								
MAX. LUMINANCE 450-900 NADIR	1 150CD/M <sup>2</sup> (EN HO)							
QUALITÉ DE LA LUMIÈRE	R9 > 50 (OPTION 90 IRC)							

## FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

## DISTRIBUTION LUMINEUSE

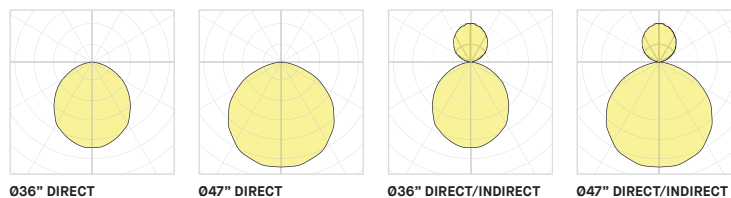

Visitez notre site Web pour les termes et conditions.



## DONNÉES TECHNIQUES