

MILL Ø14 UNLIT SUSPENDED


PROJECT PROJET
SPEC TYPE
NOTES



SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

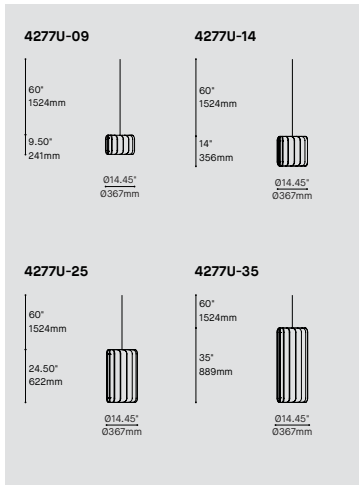

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE	
MODEL MODÈLE			
4277U-09	MILL UNLIT (Ø14" X 9.5")		
4277U-14	MILL UNLIT (Ø14" X 14")		
4277U-25	MILL UNLIT (Ø14" X 25")		
4277U-35	MILL UNLIT (Ø14" X 35")		
CABLE CÂBLE		AC	
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE		
CABLE LENGTH LONGUEUR DE CÂBLE			
60	60" AIRCRAFT CABLE (STD LENGTH)		
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
SHADE FINISH FINI ABAT-JOUR			
ABF	AZURE BLUE FELT	BYF BANANA YELLOW FELT	REF RED FELT
AWF	ARCTIC WHITE FELT	CHF CHARCOAL FELT	SGF SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF NAVY BLUE FELT	TGF TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF OCEAN BLUE FELT	ZFF ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF PEAR GREEN FELT	
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its four different diameters, four different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
- INSTALLATION:** Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
- SHADE:** The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø14" UNLIT SUSPENDED


PROJECT PROJÉT
SPEC TYPE
NOTES



SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

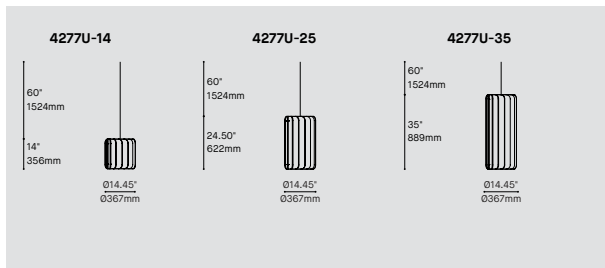

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
MODEL MODÈLE					
4277U-14	MILL UNLIT (Ø14" X 14")				
4277U-25	MILL UNLIT (Ø14" X 25")				
4277U-35	MILL UNLIT (Ø14" X 35")				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



- DESIGN:** MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
- INSTALLATION:** Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
- SHADE:** The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL UNLIT SUSPENDED

QUICKSHIP

PROJECT PROJET

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

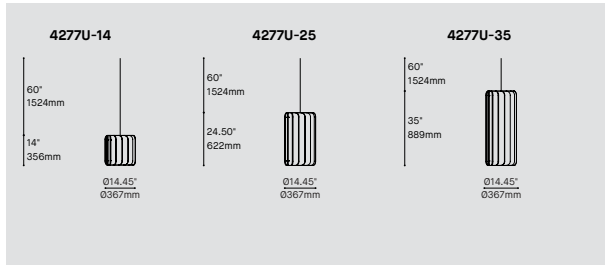

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4277U-14 MILL UNLIT (Ø14" X 14")
 4277U-25 MILL UNLIT (Ø14" X 25")
 4277U-35 MILL UNLIT (Ø14" X 35")

CABLE CÂBLE

AC AIRCRAFT MOUNTING, FIELD ADJUSTABLE

AC

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
 ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

SHADE FINISH FINI ABAT-JOUR

ABF AZURE BLUE FELT BYF BANANA YELLOW FELT REF RED FELT
 AWF ARCTIC WHITE FELT CHF CHARCOAL FELT SGF SILVER GRAY FELT
 BBF BASIC BLACK FELT NBF NAVY BLUE FELT TGF TITANIUM GRAY FELT
 BOF BLOOD ORANGE FELT OBF OCEAN BLUE FELT ZFF ZINFANDEL FELT
 BTF BATTLESHIP GRAY FELT PGF PEAR GREEN FELT
 PREMIUM* PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE
 *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

MILL is a fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.

INSTALLATION:

Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.

SHADE:

The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.

MILL Ø14" INDIRECT SUSPENDED

PROJECT PROJET
SPEC TYPE
NOTES




SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONS OPTIONS DE MONTAGE



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
MODEL MODÈLE					
42771-14	MILL INDIRECT (Ø14" X 14")				
42771-25	MILL INDIRECT (Ø14" X 25")				
42771-35	MILL INDIRECT (Ø14" X 35")				
LIGHT SOURCE SOURCE LUMINEUSE					
LED.REG	REGULAR OUTPUT INDIRECT				
LED.HO	HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).					
* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE		RC1			
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		RCC			
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
ACCESSORY ACCESSOIRE					
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING					
39NLAA*	NLIGHT AIR GEN 2 REMOTE POWER PACK				
39NLWA*	NLIGHT WIRED REMOTE POWER PACK				
* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .					

MILL Ø14" INDIRECT SUSPENDED

QUICKSHIP

PROJECT PROJET

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE			
QUICKSHIP					
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS				
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS				
MODEL MODÈLE					
42771-14	MILL INDIRECT (Ø14" X 14")				
42771-25	MILL INDIRECT (Ø14" X 25")				
42771-35	MILL INDIRECT (Ø14" X 35")				
LIGHT SOURCE SOURCE LUMINEUSE					
LED.REG	REGULAR OUTPUT INDIRECT				
LED.HO	HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
30	3000K				
35	3500K				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE		RC1			
RC1	ROUND CANOPY / PAVILLON ROND SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE		RCC			
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		

Acoustic Material Color Options for Mill




Standard colors



ABF
Azure Blue




AWF
Arctic White



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




BYF
Banana Yellow




CHF
Charcoal



NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BGF
Bubble Gum



BKF
Bark Brown



DBF
Denim Blue



DTF
Deep Teal Green



DYF
Daisy Yellow




GGF
Grass Green




LBF
Light Beige




LGF
Lime Green



MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



SBF
Sky Blue





TOF
Tangerine Orange



TPF
Tulip Purple

- Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
- Due to the dye process, colors may vary slightly from batch to batch.

MILL UNLIT

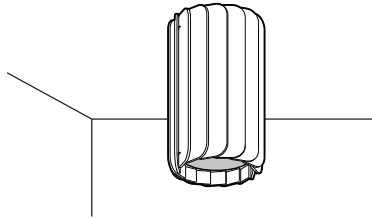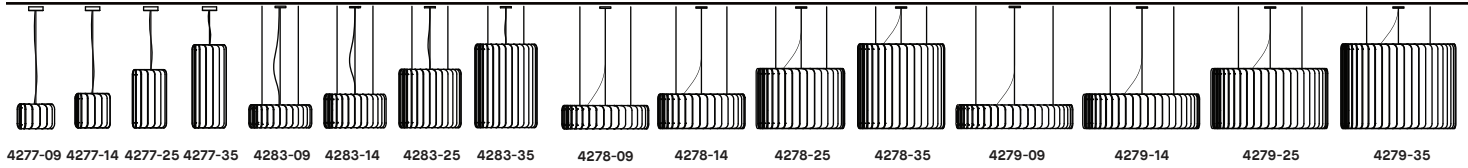

TWO MOUNTING OPTIONS

The fixture can be suspended or surface mounted depending of the space needs.

RECYCLED PANELS

Custom CNC cut panels composed of polyester fibers (PET) with 42% recycled content. 100% recyclable, non-toxic, non-allergenic and non-irritable. The material is also low VOC and fire rated.




FELT ACCENT

A felt disc adds an additional sound-absorbing element.




NOISE REDUCTION

The arrangement of the vertical panels increases the effective surface area of sound absorbing material optimizing the acoustic performance of the luminaire. The panels are available in 30 colors. For all color options, refer to the Acoustic Material Color Options page.

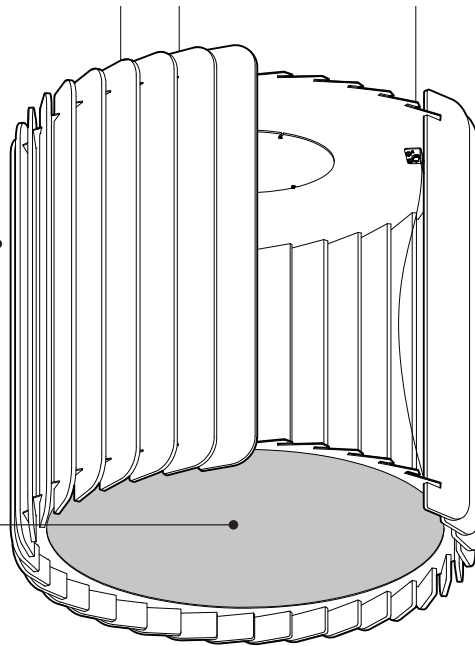

POWER CABLE

Power cable offered in vinyl to match other Eureka products or in textile available in 12 colors.

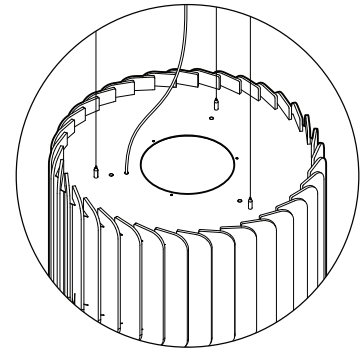

427XI

TRUE UPLIGHT

The suspended version offers an optional light source with great uplift performance. We recommend a minimum suspension of 22" for a diffused uplift.

CLEANING

A proper and regular cleaning will help extend the lifespan of acoustic products. Periodic cleaning can be done with a vacuum or wiping with a damp microfiber cloth. Do not use any abrasive, soap, or chemical cleaner.

PRODUCT SPECIFICATION

Ø14" INDIRECT


Ø36" / Ø47" INDIRECT

PERFORMANCE	REG	HO	REG	HO
SYSTEM WATTAGE	14.4W	20.6W	19W	29W
DELIVERED LUMENS (4000K)	1121 LM	1525 LM	1408 LM	2051 LM
OTHER INFORMATION			Ø36"	Ø47"
WEIGHT	10LBS / 4KG		30LBS / 13KG	40LBS / 18KG
L70 (LUMEN MAINTENANCE)	55,000		54,700	60,000
WELL & LEED STANDARD REQUIREMENTS				
LIGHT QUALITY	R9 > 50 (WITH 4000K)			


EFFICACY MULTIPLIERS

LIGHT DISTRIBUTION

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91



Ø14" INDIRECT



Ø36"/Ø47" INDIRECT





Visit our website for warranty terms and conditions.



TECHNICAL DATA

MILL UNLIT & INDIRECT

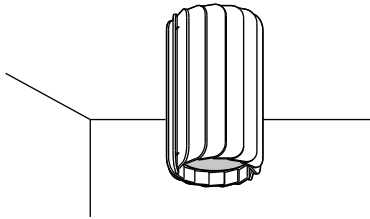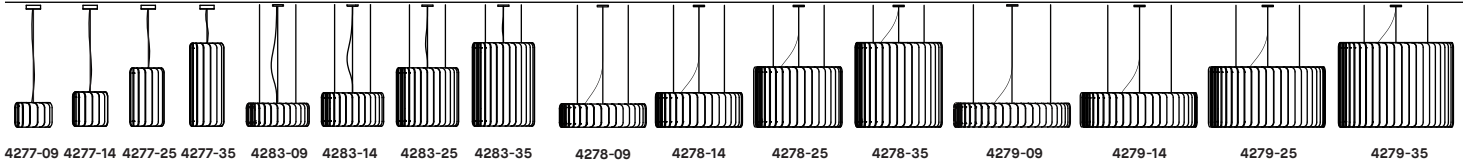

DEUX OPTIONS DE MONTAGE

Le luminaire peut être suspendu ou monté en surface selon les besoins de l'espace.

PANNEAUX RECYCLÉS

Panneaux composés de fibres de polyester (PET) avec 50% de matière recyclées. 100% recyclable, non-toxique, non- allergène et non-irritable. Faible teneur en COV et résistance au feu.




ACCENT DE FEUTRE

Un disque de feutre ajoute un élément d'atténuation de bruit supplémentaire.




ATTÉNUATION DU BRUIT

La superposition des panneaux verticaux augmente la surface effective du matériel insonorisant, optimisant les performances acoustiques du luminaire. Les panneaux sont disponibles en 30 couleurs. Pour toutes options de couleurs, consulter la page d'options de couleurs de matériel acoustique.

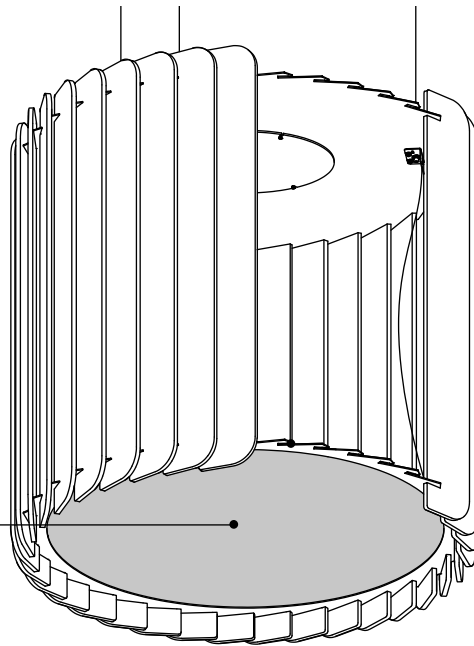

CÂBLE D'ALIMENTATION

Câble d'alimentation en vinyl assorti aux autres produits Eureka ou en tissu offert en 12 couleurs.



42XXI

SOURCE INDIRECTE PUISSANTE

La version suspension offre en option une source lumineuse pour offrir un éclairage indirect performant. Nous recommandons une suspension minimum de 22" pour avoir une lumière indirecte diffuse.

NETTOYAGE

Un nettoyage approprié et régulier contribuera à prolonger la durée de vie des produits acoustiques. Un nettoyage périodique peut être fait avec un aspirateur ou en essuyant avec un chiffon humide. Ne pas utiliser de produits abrasifs, de savon ou de produits nettoyants chimiques.

SPÉCIFICATION PRODUIT

Ø14" / Ø09" INDIRECT


Ø25" / Ø36" / Ø47" INDIRECT

PERFORMANCE	REG	HO	REG	HO	
PUISSANCE TOTALE	14.4W	20.6W	19W	29W	
LUMENS RÉELS (4000K)	1121 LM	1525 LM	1408 LM	2051 LM	
AUTRES INFORMATION	Ø09"	Ø14"	Ø25"	Ø36"	Ø47"
POIDS	10LBS / 4KG	10LBS / 4KG	20LBS / 9KG	30LBS / 13KG	40LBS / 18KG
L70 (MAINTENANCE DE LA LUMIÈRE)	55,000	55,000	49,400	54,700	60,000
CRITÈRES DE CERTIFICATION WELL					
QUALITÉ DE LA LUMIÈRE	R9 > 50 (WITH 4000K)				


FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE



Ø14" INDIRECT



Ø25"/Ø36"/Ø47" INDIRECT



Visitez notre site Web pour les termes et conditions.