


ROOF 74300 PENDANT

PROJECT PROJÉT
SPEC TYPE
NOTES



POWER CORD FINISH FINI CÂBLE D'ALIMENTATION


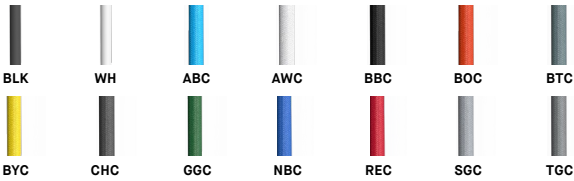


SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONS OPTIONS DE MONTAGE

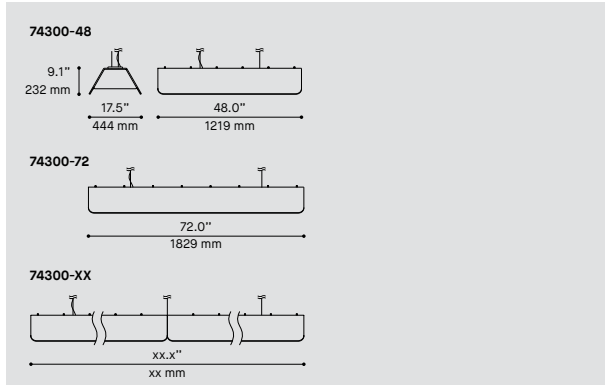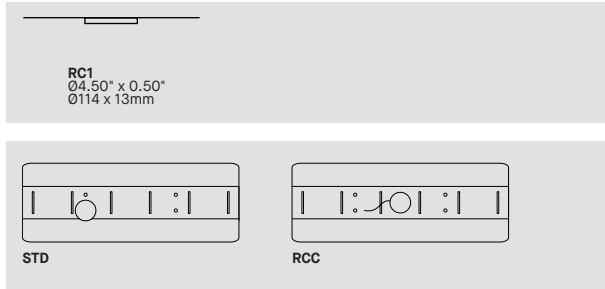

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE			
MODEL MODÈLE					
74300D	ROOF DIRECT				
74300DI*	ROOF DIRECT-INDIRECT				
	* DOWNLIGHT AND UPLIGHT ARE DIMMED INDEPENDENTLY - EXCEPT WITH NLIGHT CONTROLS				
PRODUCT LENGTH LONGUEUR LUMINAIRE					
48	SINGLE SECTION 48"				
72	SINGLE SECTION 72"				
96	MULTI SECTION 96" (2 X 48")				
120	MULTI SECTION 120" (1 X 48" + 1 X 72")				
144	MULTI SECTION 144" (2 X 72")				
192	MULTI SECTION 192" (1 X 48" + 1 X 72" + 1 X 48")				
216	MULTI SECTION 192" (3 X 72")				
288	MULTI SECTION 288" (4 X 72")				
DIRECT LIGHT SOURCE SOURCE LUMINEUSE DIRECTE		REG			
LED REG	REGULAR OUTPUT				
INDIRECT LIGHT SOURCE SOURCE LUMINEUSE INDIRECTE					
LED REG*	REGULAR OUTPUT				
	* FILL ONLY FOR 74300DI				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27	2700K				
30	3000K				
35	3500K				
40*	4000K				
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-227V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
	* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT)				
	* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
	* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
EMERGENCY BATTERY BATTERIE D'URGENCE					
	FOR 120-277V ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.				
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
	*3981E ACCESSORY IS REQUIRED FOR THIS OPTION				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING AND BLACK OR WHITE CABLE, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.				
MOUNTING MONTAGE		RC1			
RC1	ROUND CANOPY / PAVILLON ROND				
	SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)				
MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE					
RCC	CENTERED ROUND CANOPY - STRAIGHT AIRCRAFT CABLES				
	* IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLE IS STANDARD.				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
RAL*	PLEASE SPECIFY RAL CODE				
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
POWER CABLE FINISH FINI CÂBLE ALIMENTATION					
BLK	BLACK VINYL	BOC*	BLOOD ORANGE	NBC*	NAVY BLUE
WH	WHITE VINYL	BTC*	BATTLESHIP GRAY	REC*	RED
ABC*	AZURE BLUE	BYC*	BANANA YELLOW	SGC*	SILVER GRAY
AWC*	ARCTIC WHITE	CHC*	CHARCOAL	TGC*	TITANIUM GRAY
BBC*	BASIC BLACK	GGC*	GRASS GREEN		
	*TEXTILE BRAIDED CORD, ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	CHF	CHARCOAL GREY FELT	REF	RED FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	SGF	SILVER GREY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	TGF	TITANIUM GRAY FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT	ZFF	ZINFANDEL FELT
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				


ENDCAP FINISH FINI EMBOUT

ABF	AZURE BLUE FELT	CHF	CHARCOAL GREY FELT	REF	RED FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	SGF	SILVER GREY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	TGF	TITANIUM GRAY FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT	ZFF	ZINFANDEL FELT
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE <small>* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE</small>				


DIFFUSER FINISH FINI DIFFUSEUR**WH** WHITE**ACCESSORY ACCESSOIRE****39NLAA*** NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA* NLIGHT WIRED REMOTE POWER PACK**ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE****3981EA** ELECTRICAL BOX FOR EMB EMERGENCY BATTERY**PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT**

Acoustic Material Color Options for Roof

Standard colors




ABF
Azure Blue



BBF
Basic Black



BOF
Blood Orange




BTF
Battleship Gray




CHF
Charcoal




NBF
Navy Blue



OBF
Ocean Blue




PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BKF
Bark Brown



DBF
Denim Blue



DTF
Deep Teal Green




GGF
Green Grass



LGF
Lime Green



MGF
Moss Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple




SBF
Sky Blue



TPF
Tulip Purple

— Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
— Due to the dye process, colors may vary slightly from batch to batch.

Cable Color Options for Roof

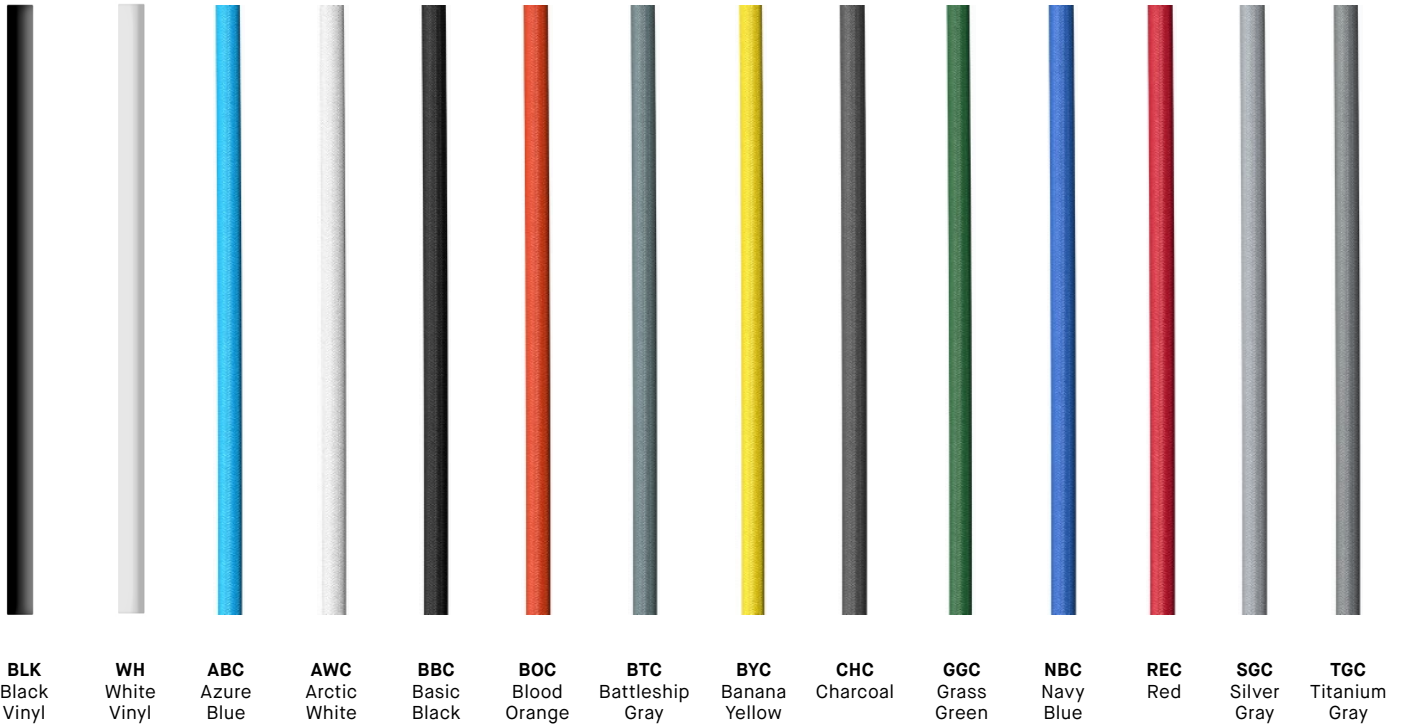


The cable has a Ø0.265in (direct) or Ø0.375in (direct+indirect) and is covered with a decorative braided sleeve.

IF YOU ARE LOOKING FOR ANOTHER COLOR, OUR TEAM IS HERE TO HELP MAKE YOUR VISION COME TRUE.

CONTACT US

- Longer lead time may apply.
- Colors shown for visual reference only.
- Due to the dye process, colors may vary slightly from batch to batch.
- Consult your sales representative or factory to get a sample.

ROOF 48" / 72"

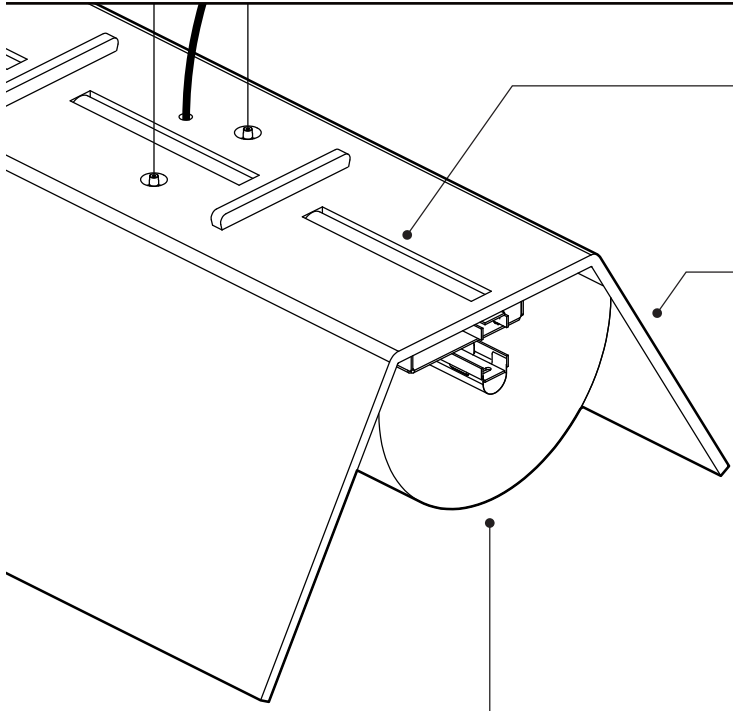


INDIRECT OPTION
Roof is offered with an optional indirect light source, which can be controlled independently. We recommend a minimum height of 12" from the ceiling for diffused indirect light.

SOFT TOUCH
The felt shell, made from recycled PET, adds an aspect of comfort thanks to its delicate feel and helps showcase the warmth of the fixture. Available in 24 colors.

CLASS A FIRE RATING
ASTM E84-17 STANDARD

NOISE REDUCTION
The material improves the acoustic properties of spaces which necessitate sound absorption.








SURFACE MOUNT
A ceiling mount version is available. This configuration includes a small felt trim, which conceals the installation hardware.

COMFORTABLE ILLUMINATION
A large diffused surface, made from a highly efficient optical film, delivers a uniform and glare-free illumination.

ATTACH & EXTEND
Combine multiple segments (4' and 6') to create a large variety of lengths. Contact your Eureka representative for custom length inquiries.
*Not offered in surface mount.

A single power drop is required, since the drivers are integrated within each fixture.

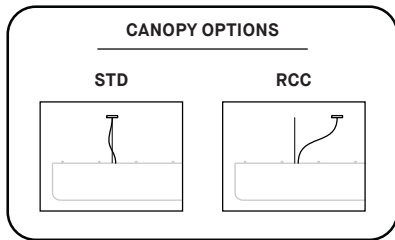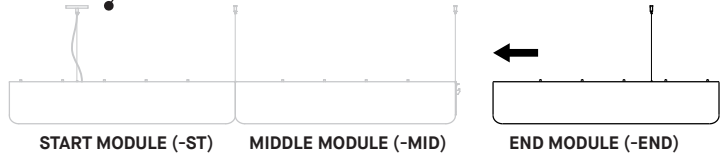


PRODUCT SPECIFICATION	4' DIRECT	6' DIRECT	4' INDIRECT	4' INDIRECT		6' INDIRECT		
	REG	REG	REG	REG (ST/END)	REG (MID)	REG	REG (ST/END)	REG (MID)
PERFORMANCE								
SYSTEM WATTAGE	32W	51W	26W	21W	16W	39W	33W	28W
DELIVERED LUMENS (4000K)	2109 LM	3398 LM	1836 LM	1468 LM	1102 LM	2761 LM	2366 LM	1971 LM
OTHER INFORMATION								
WEIGHT	8LBS / 3.6KG	12LBS / 5.5KG	8LBS / 3.6KG			12LBS / 5.5KG		
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS			60,000 HRS		
WELL/LEED STANDARD REQUIREMENTS								
MAX. LUMINANCE 45°-90° OF NADIR	709 CD/M² (AT REG)	501 CD/M² (AT REG)	628 CD/M² (AT REG)			387 CD/M² (AT REG)		
LIGHT QUALITY	R9 > 50 (WITH 4000K)		R9 > 50 (WITH 4000K)			R9 > 50 (WITH 4000K)		
FLICKERING TOLERANCE	LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24		LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24			LOW FLICKER, COMPLIANT TO CALIFORNIA TITLE 24		

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.97
90+	3000K	0.93
90+	2700K	0.89

LIGHT DISTRIBUTION

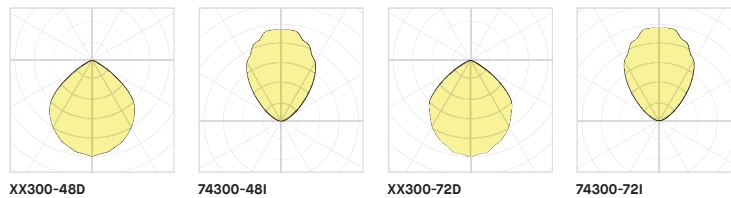


Visit our website for warranty terms and conditions.



TECHNICAL DATA

ROOF 48" / 72"

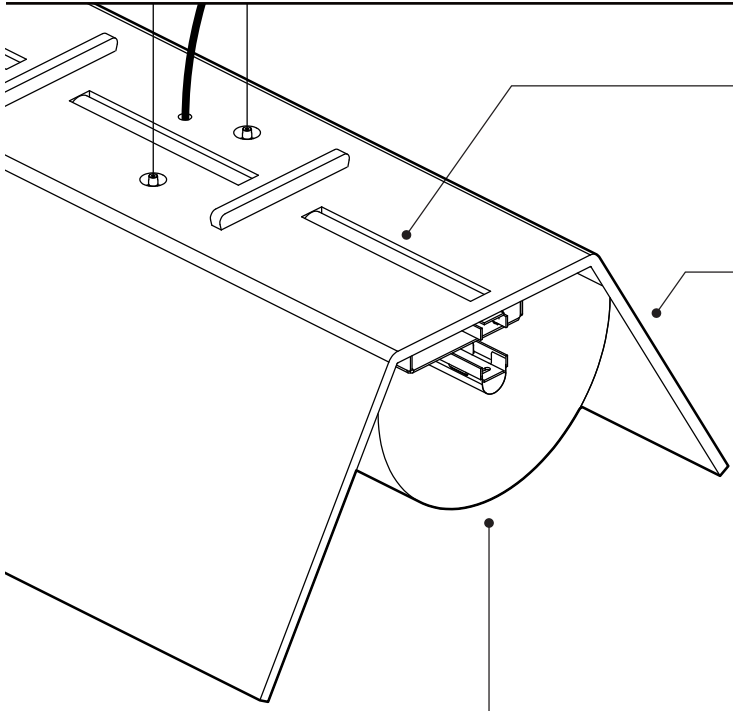

OPTION INDIRECTE

Roof est offert avec une source lumineuse indirecte optionnelle qui peut être contrôlée indépendamment. Nous recommandons une hauteur minimale de 12" du plafond pour une lumière indirecte diffuse.

TOUCHE CHALEUREUSE


L'abat-jour, fait de PET recyclé, ajoute un élément de confort grâce à sa surface feutrée et met en valeur l'aspect chaleureux du luminaire. Disponible en 24 couleurs.

CLASS A FIRE RATING
ASTM E84-17 STANDARD



REDUCTION DU BRUIT

Grâce à ses propriétés de réduction du bruit, le matériel permet d'améliorer l'acoustique d'une pièce.



MONTAGE SURFACE

Une version plafonnier est disponible. Cette configuration inclut une petite bordure de feutre, qui cache le mécanisme d'installation.




ILLUMINATION AGRÉABLE

Une grande surface de diffusion, fait d'un film optique de haute efficacité, distribue une illumination uniforme et sans éblouissement.

COMBINER POUR ALLONGER

Combinez plusieurs segments (4' et 6') bout-à-bout pour générer une grande variété de longueurs. Contactez votre représentant Eureka pour toute demande de longueur personnalisée.
*Non-disponible en version surface.

Un seul câble d'alimentation est requis, puisque les unités d'alimentation sont intégrées dans chaque luminaire.

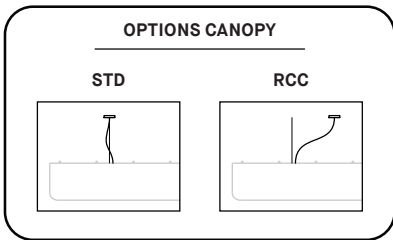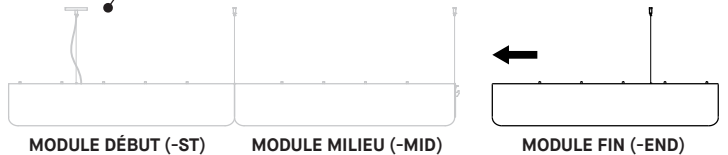


SPECIFICATION PRODUIT	4' DIRECT	6' DIRECT	4' INDIRECT	6' INDIRECT				
PERFORMANCE	REG	REG	REG	REG (EXT-ST/END)	REG (MID)	REG	REG (EXT-ST/END)	REG (MID)
PUISSANCE TOTALE	32W	51W	26W	21W	16W	39W	33W	28W
LUMENS RÉELS (4000K)	2109 LM	3398 LM	1836 LM	1468 LM	1102 LM	2761 LM	2366 LM	1971 LM
AUTRES INFORMATIONS								
POIDS	8LBS / 3.6KG	12LBS / 5.5KG	8LBS / 3.6KG			12LBS / 5.5KG		
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 H	60,000 H	60,000 H			60,000 H		
CRITÈRES DE CERTIFICATION WELL/LEED								
MAX. LUMINANCE 45°-90° NADIR	709 CD/M² (EN REG)	501 CD/M² (EN REG)	628 CD/M² (EN REG)			387 CD/M² (EN REG)		
QUALITÉ DE LA LUMIÈRE	R9 > 50 (EN 4000K)	R9 > 50 (EN 4000K)	R9 > 50 (EN 4000K)			R9 > 50 (EN 4000K)		
TOLÉRANCE DE CLIGNOTEMENTS	PEU DE CLIGNOTEMENT (CONFORME À CALIFORNIA TITLE 24)			PEU DE CLIGNOTEMENT (CONFORME À CALIFORNIA TITLE 24)		PEU DE CLIGNOTEMENT (CONFORME À CALIFORNIA TITLE 24)		

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.97
90+	3000K	0.93
90+	2700K	0.89

DISTRIBUTION LUMINEUSE

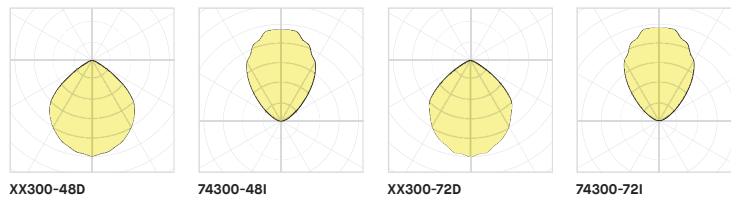

Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES