


SEGMENT 74510SDX

AVAILABLE TO ORDER STARTING MAY 21ST. ORDERS WILL SHIP BEGINNING IN SEPTEMBER






PROJECT PROJÉT
SPEC TYPE
NOTES

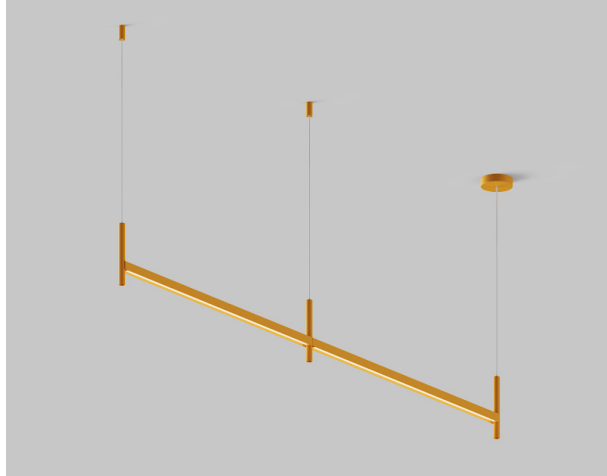

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74510D	SEGMENT - DIRECT ILLUMINATION	
74510DI*	SEGMENT - DIRECT & INDIRECT ILLUMINATION (DUAL DIMMING)	
74510SD	SEGMENT MULTIPLE - DIRECT ILLUMINATION	
74510SDI*	SEGMENT MULTIPLE - DIRECT & INDIRECT ILLUMINATION (DUAL DIMMING)	
*DOWNLIGHT AND UPLIGHT ARE DIMMED INDEPENDENTLY - EXCEPT WITH NLIGHT CONTROLS		
CONFIGURATION		
24	LINE 24"	
48	LINE 48"	
72	LINE 72"	
96	LINE 96"	
L2X48	LINE 2 X 48"	
L3X48	LINE 3 X 48"	
L4X48	LINE 4 X 48"	
L2X72	LINE 2 X 72"	
L3X72	LINE 3 X 72"	
L4X72	LINE 4 X 72"	
L2X96	LINE 2 X 96"	
L3X96	LINE 3 X 96"	
L4X96	LINE 4 X 96"	
THE MEASUREMENTS PROVIDED ARE NOMINAL. PLEASE REFER TO THE DRAWINGS FOR PRECISE DIMENSIONS.		
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP*	PHASE DIMMING (120V ONLY)	
NLTAIR2**	NLIGHT AIR CONTROL GEN 2	
NLIGHT**	NLIGHT WIRED CONTROL	
* CONSULT CANOPY COMPATIBILITY CHART AT THE END OF DOC. FOR AVAILABILITY		
** NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE POWER PACK ACC. (39NLWA OR 39NLAA)		
** ONLY NLIGHT WIRED IS COMPATIBLE WITH RC2		
LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS		
EMERGENCY BATTERY BATTERIE D'URGENCE		
EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION		
EMERGENCY BATTERY ONLY AVAILABLE FOR SINGLE SECTION.		
PLEASE CONTACT YOUR EUREKA REPRESENTATIVE IF NEEDED FOR MORE SECTIONS		
CABLE CÂBLE		
C	POWER CABLE, FIELD ADJUSTABLE	
S	STEM	
CABLE LENGTH LONGUEUR DE CÂBLE		
36	36" STEM	
48	48" STEM	
60	60" STEM	
60	60" CABLE (STD LENGTH)	
**	CUSTOM STEM OR CABLE LENGTH (PLEASE SPECIFY)	
CUSTOM STEM LENGTH POSSIBLE UP TO 96". LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE		
CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY		
RC1	SCREWLESS CANOPY Ø5.50" X 1.35" (CABLE) OR Ø6.05" X 1.35" (STEM) (2473F)	
RC2*	REMOTE DRIVER OPTION SCREWLESS FLAT CANOPY Ø5.00" X 0.21" (2471C)	
* REQUIRES ACCESSORY 3981GX.		



MOUNTING OPTIONS OPTIONS DE MONTAGE

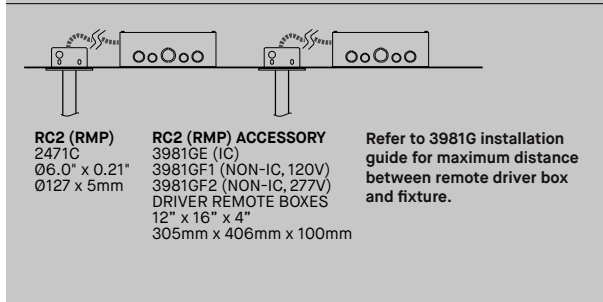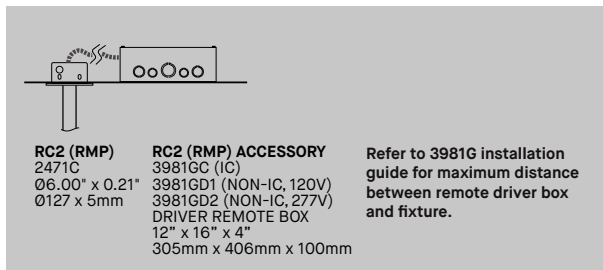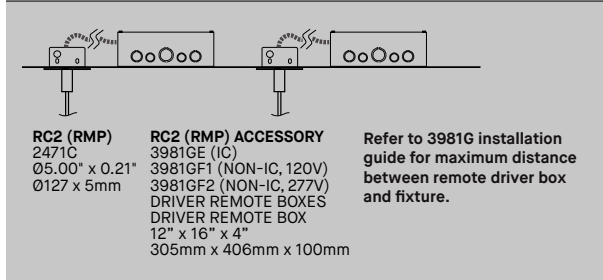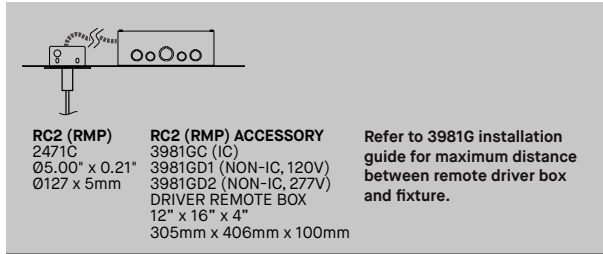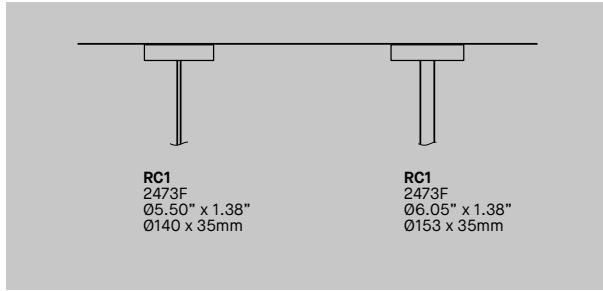

CANOPY AND ANCHORS FINISH FINI PAVILLON ET ANCRAGE(S)

BLKE	BLACK
WHE	WHITE
MATCH*	COLOR MATCH WITH LUMINAIRE
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

POWER CABLE FINISH FINI CABLE ALIMENTATION

BBC	BLACK BRAIDED CABLE
AWC	ARTIC WHITE BRAIDED CABLE

FIXTURE FINISH FINI LUMINAIRE

BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		

RAL** PLEASE SPECIFY RAL CODE

ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR

FRO	FROST
PRI	PRISMATIC

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING
CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY


3981GC	1 DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD1	1 NON-IC 120V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD2	1 NON-IC 277V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GE	2 DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF1	2 NON-IC 120V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF2	2 NON-IC 277V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"

39NLAA	NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA	NLIGHT WIRED REMOTE CONTROLLER

ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
---------------	--


SEGMENT 74510SDX

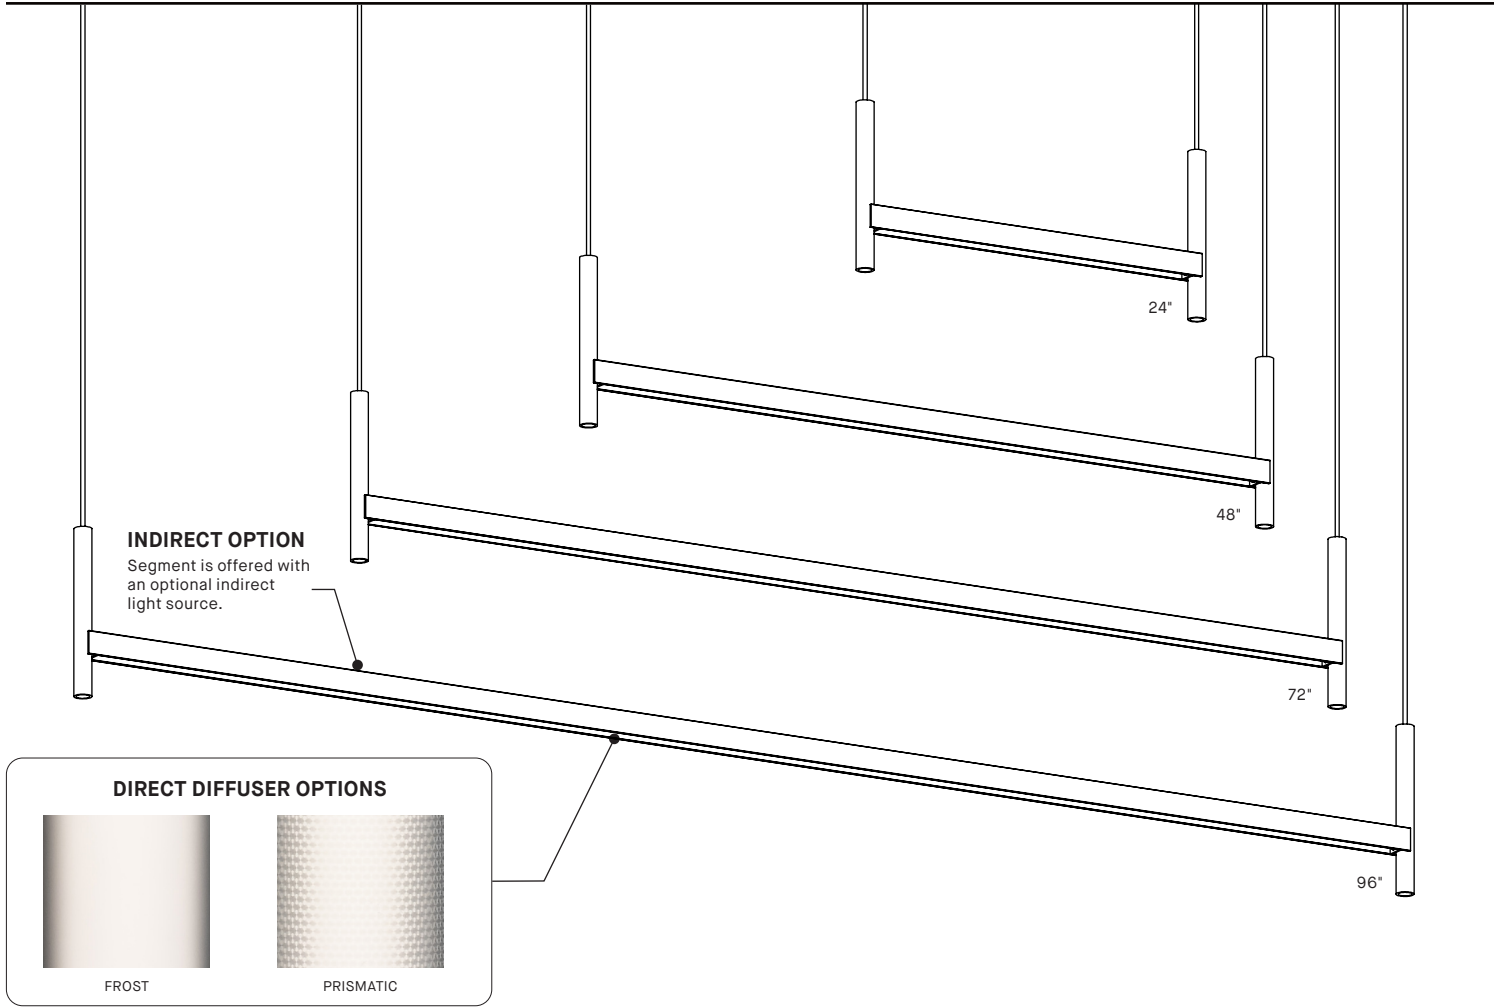

PRODUCT SPECIFICATION	24" DIRECT (PER SECTION)	48" DIRECT (PER SECTION)	72" DIRECT (PER SECTION)	96" DIRECT (PER SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
SYSTEM WATTAGE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 50 W
DELIVERED LUMENS (4000K)	579 — 1154 LM	1157 — 2307 LM	1735 — 3460 LM	2314 — 4615 LM
DELIVERED LUMENS/FOOT (4000K)	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT
EFFICACY	95 — 91 LM/W	95 — 91 LM/W	94 — 90 LM/W	95 — 91 LM/W
	24" INDIRECT (PER SECTION)	48" INDIRECT (PER SECTION)	72" INDIRECT (PER SECTION)	96" INDIRECT (PER SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
SYSTEM WATTAGE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 51 W
DELIVERED LUMENS (4000K)	735 — 1463 LM	1469 — 2925 LM	2203 — 4384 LM	2937 — 5854 LM
DELIVERED LUMENS/FOOT (4000K)	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT
EFFICACY	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W
OTHER INFORMATION				
WEIGHT	~ 4.3 LBS / 2 KG	~ 5.5 LBS / 2.5 KG	~ 7.2 LBS / 3.2 KG	~ 8.4 LBS / 3.8 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS


CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

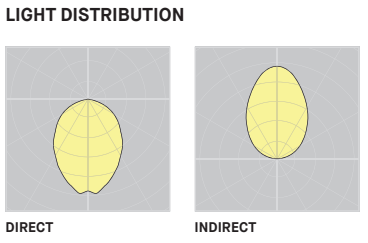


Visit our website for warranty terms and conditions.

SEGMENT 74510SDX

CABLE SUSPENSION

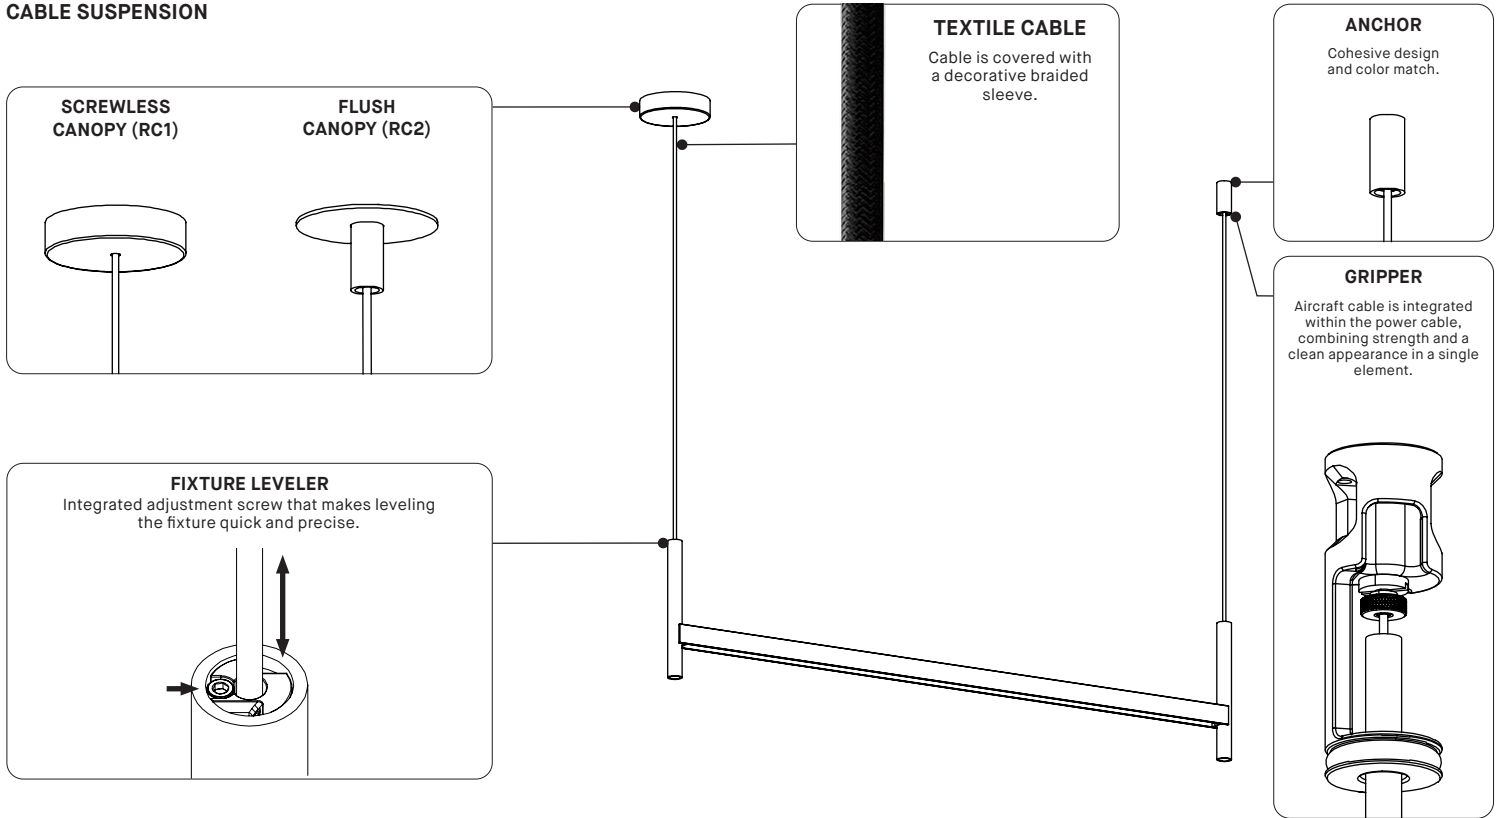


STEM

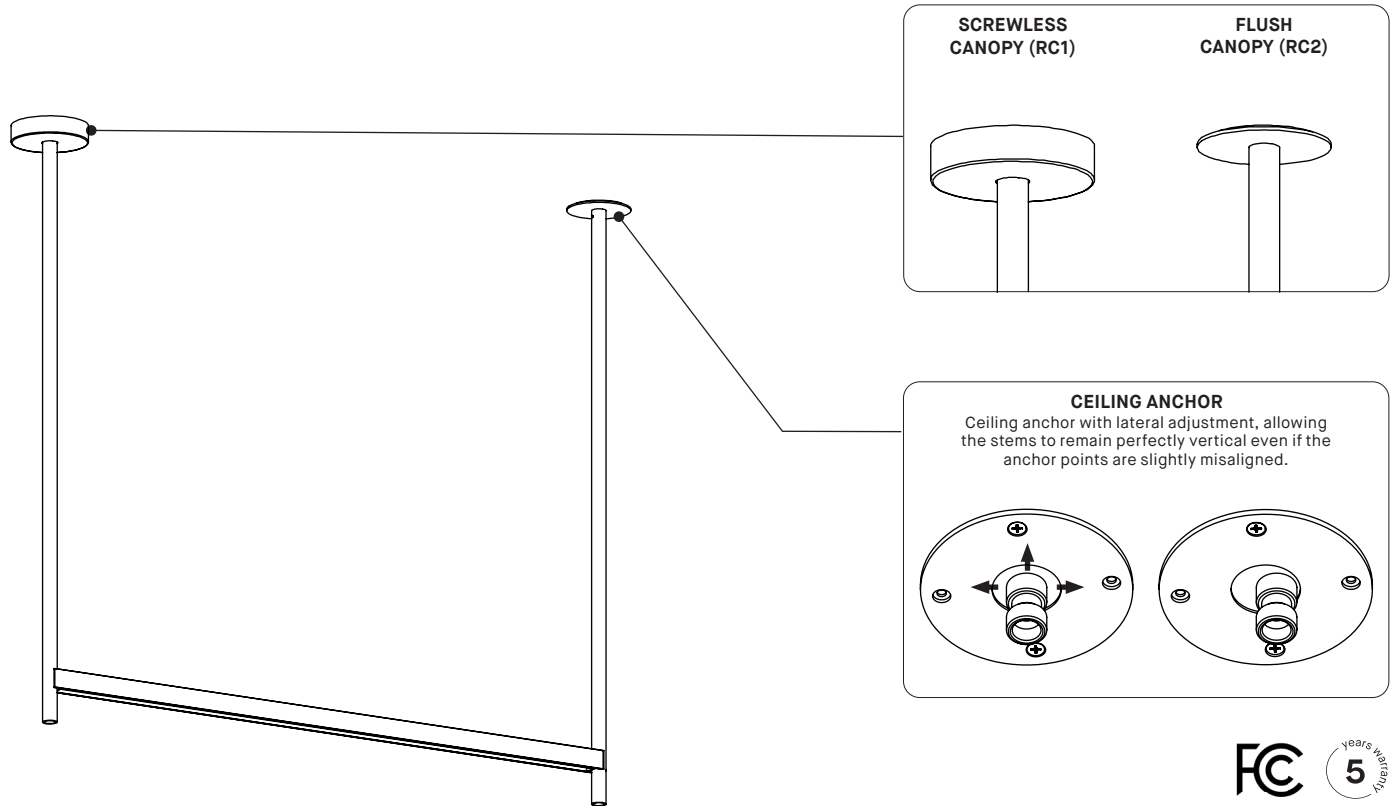

Visit our website for warranty terms and conditions.

SEGMENT 74510SDX

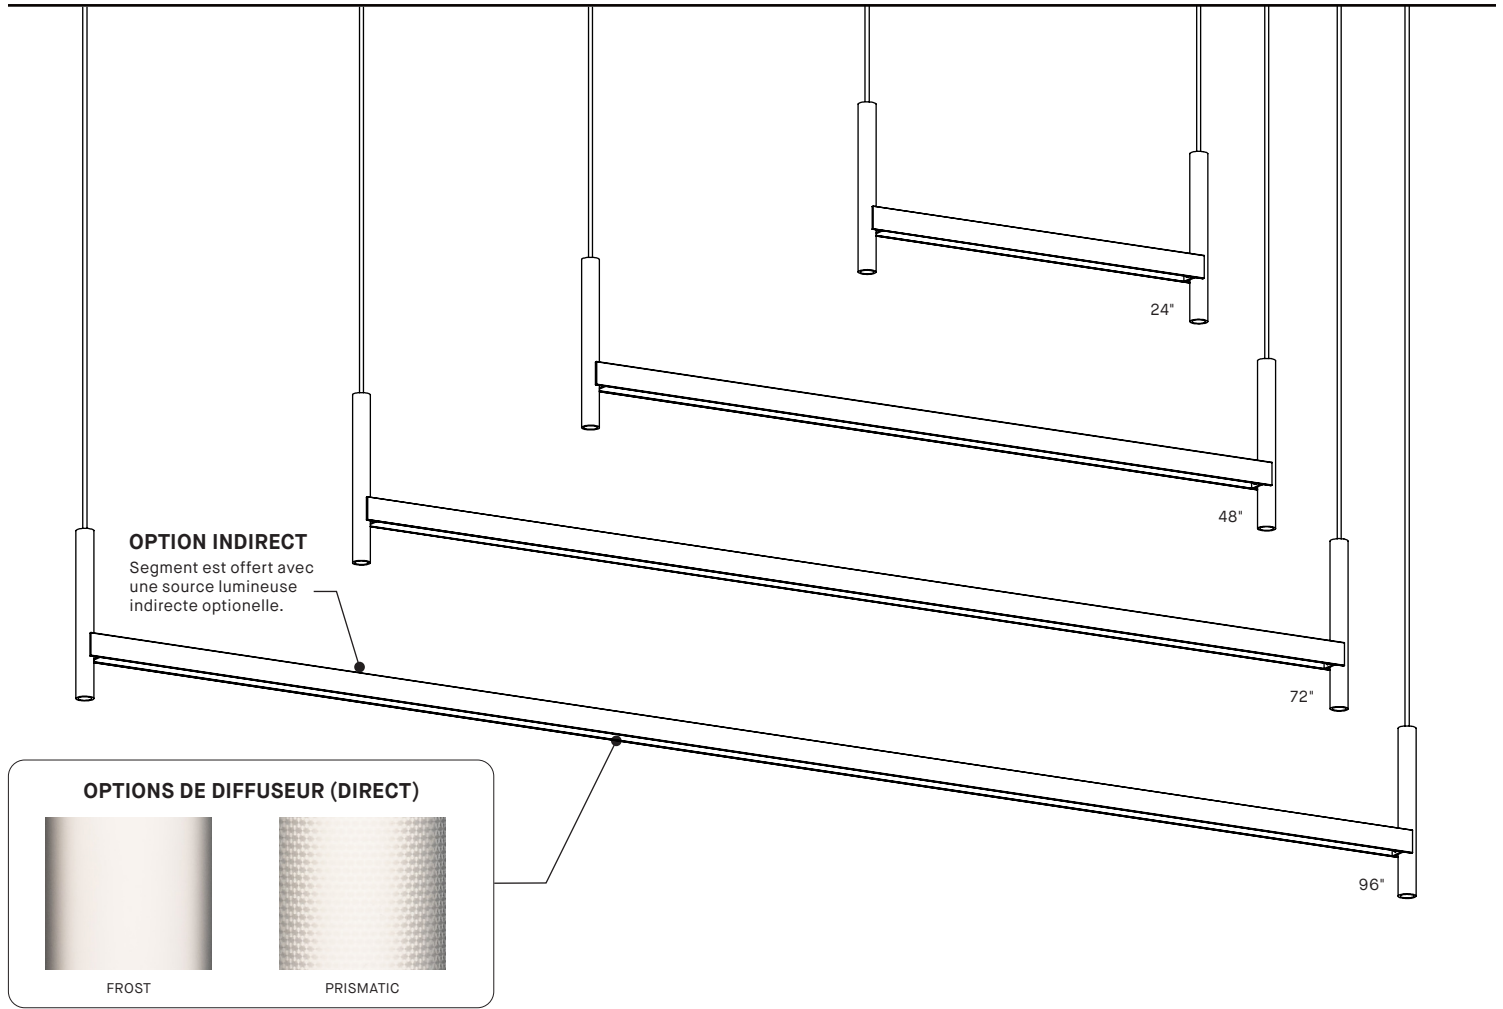

SPECIFICATION DE PRODUIT	24" DIRECT (PAR SECTION)	48" DIRECT (PAR SECTION)	72" DIRECT (PAR SECTION)	96" DIRECT (PAR SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
PUISSANCE TOTALE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 50 W
LUMENS RÉELS (4000K)	579 — 1154 LM	1157 — 2307 LM	1735 — 3460 LM	2314 — 4615 LM
LUMENS RÉELS PAR PIED (4000K)	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT
EFFICACITÉ	95 — 91 LM/W	95 — 91 LM/W	94 — 90 LM/W	95 — 91 LM/W


	24" INDIRECT (PAR SECTION)	48" INDIRECT (PAR SECTION)	72" INDIRECT (PAR SECTION)	96" INDIRECT (PAR SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
PUISSANCE TOTALE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 51 W
LUMENS RÉELS (4000K)	735 — 1463 LM	1469 — 2925 LM	2203 — 4384 LM	2937 — 5854 LM
LUMENS RÉELS PAR PIED (4000K)	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT
EFFICACITÉ	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W

OTHER INFORMATION				
POIDS	~ 4.3 LBS / 2 KG	~ 5.5 LBS / 2.5 KG	~ 7.2 LBS / 3.2 KG	~ 8.4 LBS / 3.8 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91


DISTRIBUTION LUMINEUSE

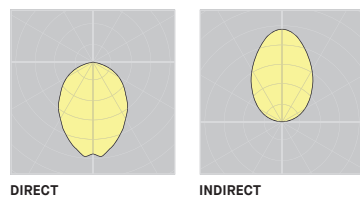


Visitez notre site Web pour les termes et conditions.

SEGMENT 74510SDX




CABLE SUSPENSION

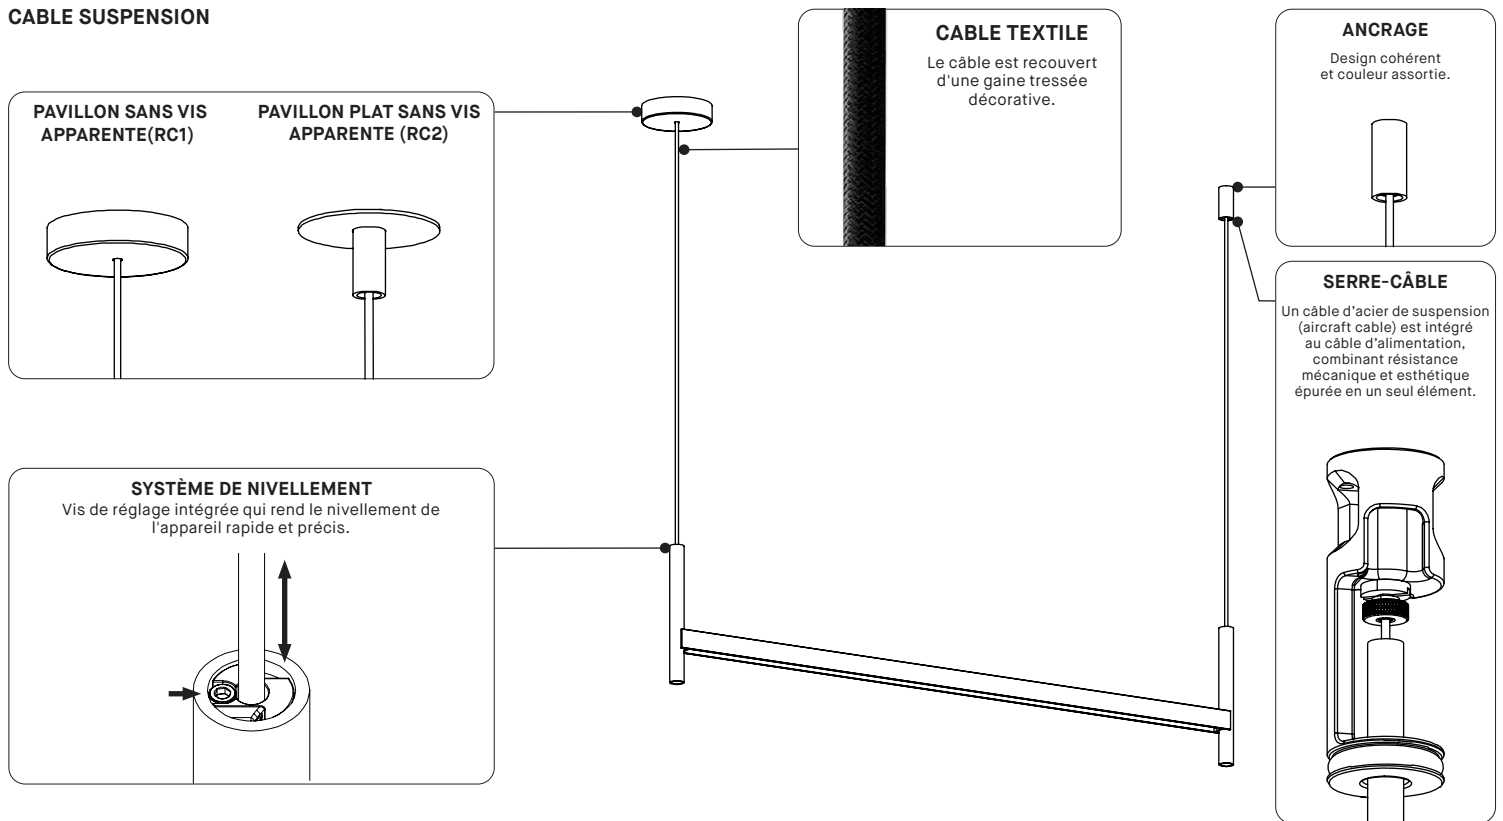







TIGE

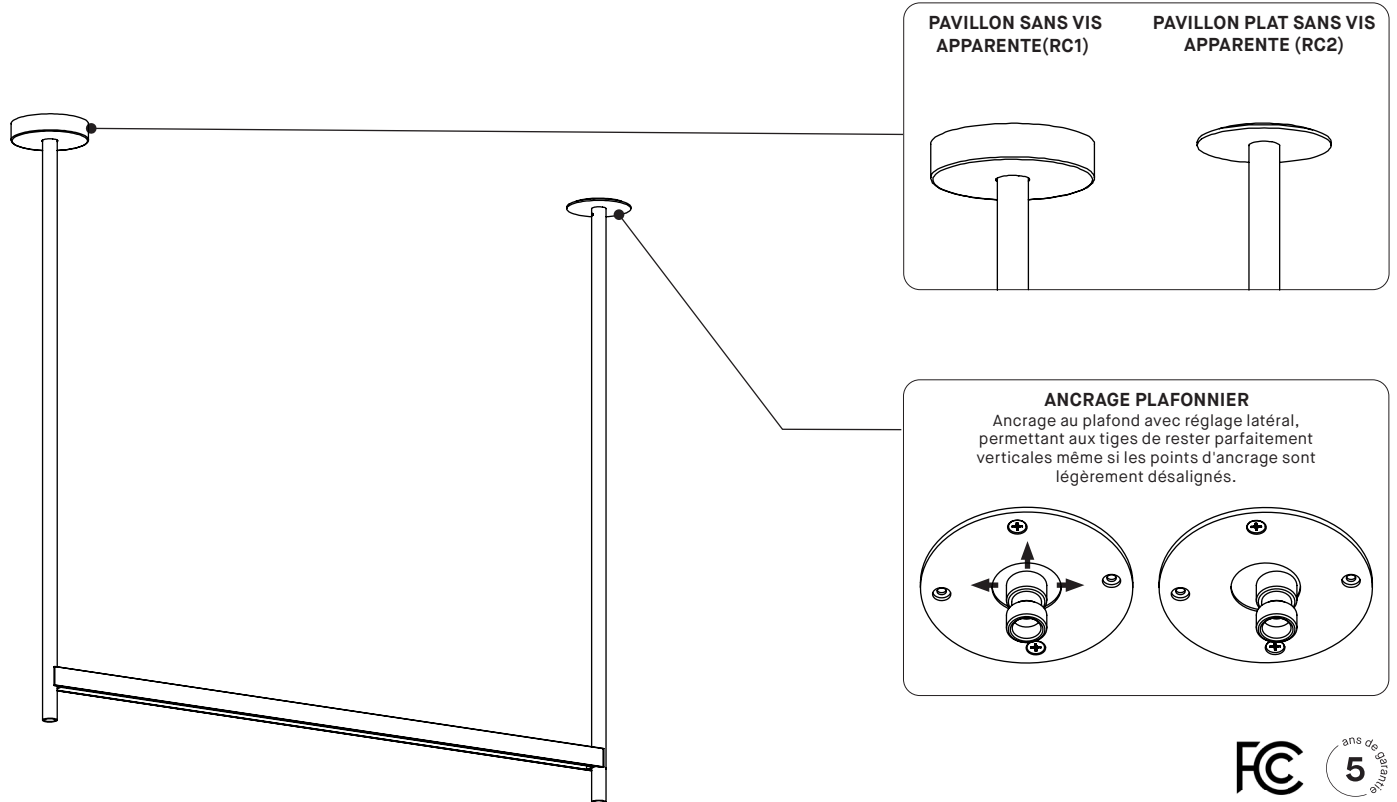

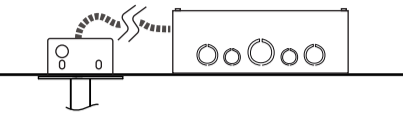


Visitez notre site Web pour les termes et conditions.

FIXTURE  1 SECTION LINE	CANOPY	
	RC1	RC2
		
	SCREWLESS CANOPY	REMOTE DRIVER(S) FLUSH SCREWLESS CANOPY
	0-10V + Phase dimming	0-10V dimming only
1 SECTION - 24" - D - REG	•	3981GC
1 SECTION - 24" - D - HO	•	3981GC
1 SECTION - 24" - DI - REG	•	3981GC
1 SECTION - 24" - DI - HO	•	3981GC
1 SECTION - 48" - D - REG	•	3981GC
1 SECTION - 48" - D - HO	•	3981GC
1 SECTION - 48" - DI - REG	•	3981GC
1 SECTION - 48" - DI - HO	•	3981GC
1 SECTION - 72" - D - REG	•	3981GC
1 SECTION - 72" - D - HO	•	3981GC
1 SECTION - 72" - DI - REG	•	3981GC
1 SECTION - 72" - DI - HO	•	3981GC
1 SECTION - 96" - D - REG	•	3981GC
1 SECTION - 96" - D - HO	•	3981GC
1 SECTION - 96" - DI - REG	•	3981GC
1 SECTION - 96" - DI - HO	•	3981GC

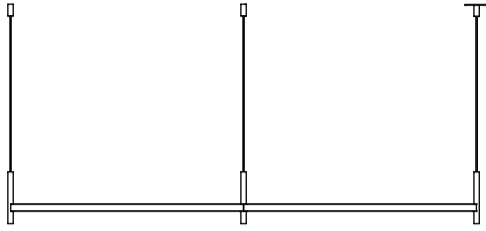 <p>2 SECTIONS LINE</p>	CANOPY	
	RC1	RC2
		
	SCREWLESS CANOPY	REMOTE DRIVER(S) FLUSH SCREWLESS CANOPY
	0-10V + Phase dimming	0-10V dimming only
2 SECTIONS - 48" - D - REG	•	3981GC
2 SECTIONS - 48" - D - HO	•	3981GC
2 SECTIONS - 48" - DI - REG	•	3981GC
2 SECTIONS - 48" - DI - HO	•	3981GC
2 SECTIONS - 72" - D - REG	•	3981GC
2 SECTIONS - 72" - D - HO	•	3981GC
2 SECTIONS - 72" - DI - REG	•	3981GC
2 SECTIONS - 72" - DI - HO	•	3981GC
2 SECTIONS - 96" - D - REG	•	3981GC
2 SECTIONS - 96" - D - HO	•	3981GC
2 SECTIONS - 96" - DI - REG	•	3981GC
2 SECTIONS - 96" - DI - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)

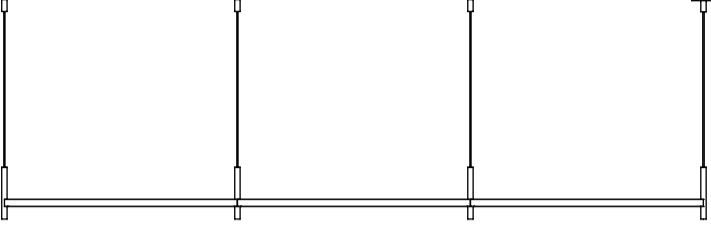FIXTURE  3 SECTIONS LINE	CANOPY	
	RC1	RC2
	 SCREWLESS CANOPY 0-10V + Phase dimming	 REMOTE DRIVER(S) FLUSH SCREWLESS CANOPY 0-10V dimming only
3 SECTIONS - 48" - D - REG	•	3981GC
3 SECTIONS - 48" - D - HO	•	3981GC
3 SECTIONS - 48" - DI - REG	•	3981GC
3 SECTIONS - 48" - DI - HO	•	3981GC
3 SECTIONS - 72" - D - REG	•	3981GC
3 SECTIONS - 72" - D - HO	•	3981GC
3 SECTIONS - 72" - DI - REG	•	3981GC
3 SECTIONS - 72" - DI - HO	•	IC DOUBLE BOX : 3981GE
3 SECTIONS - 96" - D - REG	•	3981GC
3 SECTIONS - 96" - D - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
3 SECTIONS - 96" - DI - REG	•	3981GC
3 SECTIONS - 96" - DI - HO	•	NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)

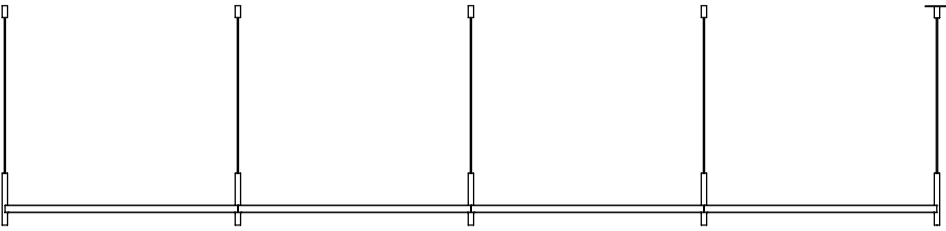FIXTURE  4 SECTIONS LINE	CANOPY	
	RC1	RC2
	 SCREWLESS CANOPY 0-10V + Phase dimming	 REMOTE DRIVER(S) FLUSH SCREWLESS CANOPY 0-10V dimming only
4 SECTIONS - 48" - D - REG	•	3981GC
4 SECTIONS - 48" - D - HO	•	3981GC
4 SECTIONS - 48" - DI - REG	•	3981GC
4 SECTIONS - 48" - DI - HO	•	3981GC
4 SECTIONS - 72" - D - REG	•	3981GC
4 SECTIONS - 72" - D - HO	•	3981GC
4 SECTIONS - 72" - DI - REG	•	3981GC
4 SECTIONS - 72" - DI - HO	•	IC DOUBLE BOX : 3981GE
4 SECTIONS - 96" - D - REG	•	3981GC
4 SECTIONS - 96" - D - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
4 SECTIONS - 96" - DI - REG	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
4 SECTIONS - 96" - DI - HO	•	NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)