
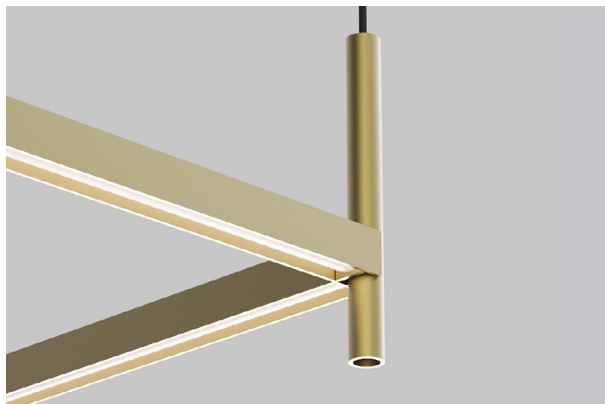


SEGMENT 74510SDX-R

PROJECT PROJET

SPEC TYPE






NOTES

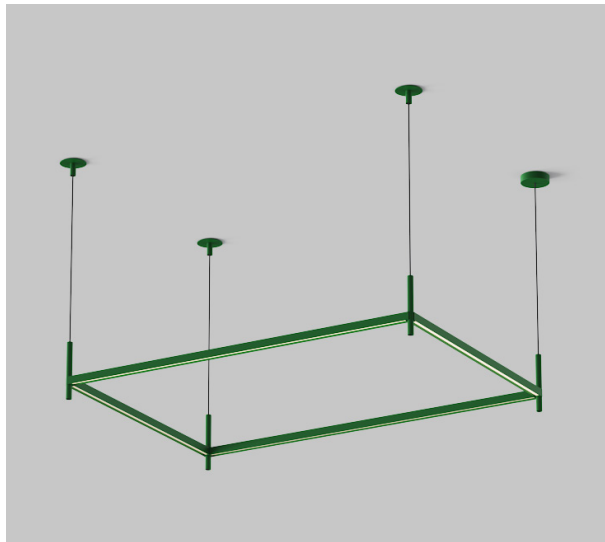

AVAILABLE TO ORDER STARTING MAY 21ST. ORDERS WILL SHIP BEGINNING IN SEPTEMBER

ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE			
74510SD	SEGMENT MULTIPLE - DIRECT ILLUMINATION		
74510SDI*	SEGMENT MULTIPLE - DIRECT & INDIRECT ILLUMINATION (DUAL DIMMING)		
	*DOWNLIGHT AND UPLIGHT ARE DIMMED INDEPENDENTLY - EXCEPT WITH NLIGHT CONTROLS		
CONFIGURATION			
R24X24	RECTANGULAR 24" X 24"		
R24X48	RECTANGULAR 24" X 48"		
R24X72	RECTANGULAR 24" X 72"		
R24X96	RECTANGULAR 24" X 96"		
R48X48	RECTANGULAR 48" X 48"		
R48X72	RECTANGULAR 48" X 72"		
R48X96	RECTANGULAR 48" X 96"		
R72X72	RECTANGULAR 72" X 72"		
R72X96	RECTANGULAR 72" X 96"		
R96X96	RECTANGULAR 96" X 96"		
	THE MEASUREMENTS PROVIDED ARE NOMINAL. PLEASE REFER TO THE DRAWINGS FOR PRECISE DIMENSIONS.		
LIGHT SOURCE SOURCE LUMINEUSE			
LED	REGULAR OUTPUT		
LED.HO	HIGH OUTPUT		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR			
27	2700K		
30	3000K		
35	3500K		
40*	4000K		
	*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)			90
90	90+ CRI		
VOLTAGE VOLTAGE			
120V	120 VOLT		
277V	277 VOLT		
CONTROL OPTION OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)		
DP*	PHASE DIMMING (120V ONLY)		
NLTAIR2**	NLIGHT AIR CONTROL GEN 2		
NLIGHT**	NLIGHT WIRED CONTROL		
	* CONSULT CANOPY COMPATIBILITY CHART AT THE END OF DOC. FOR AVAILABILITY		
	** NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE POWER PACK ACC. (39NLWA OR 39NLAA)		
	** ONLY NLIGHT WIRED IS COMPATIBLE WITH RC2		
	LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS		
EMERGENCY BATTERY BATTERIE D'URGENCE			
	EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX		
	* 3981E ACCESSORY IS REQUIRED FOR THIS OPTION		
	EMERGENCY BATTERY ONLY AVAILABLE FOR SINGLE SECTION.		
	PLEASE CONTACT YOUR EUREKA REPRESENTATIVE IF NEEDED FOR MORE SECTIONS		
CABLE CÂBLE			
C	POWER CABLE, FIELD ADJUSTABLE		
S	STEM		
CABLE LENGTH LONGUEUR DE CÂBLE			
36	36" STEM		
48	48" STEM		
60	60" STEM		
60	60" CABLE (STD LENGTH)		
**	CUSTOM STEM OR CABLE LENGTH (PLEASE SPECIFY)		
	CUSTOM STEM LENGTH POSSIBLE UP TO 96". LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.		
MOUNTING MONTAGE			
	CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY		
RC1	SCREWLESS CANOPY Ø5.50" X 1.35" (CABLE) OR Ø6.05" X 1.35" (STEM) (2473F)		
RC2*	REMOTE DRIVER OPTION SCREWLESS FLAT CANOPY Ø5.00" X 0.21" (2471C)		
	* REQUIRES ACCESSORY 3981GX.		
CANOPY AND ANCHORS FINISH FINI PAVILLON ET ANCRAGE(S)			
BLKE	BLACK		
WHE	WHITE		
MATCH	COLOR MATCH WITH LUMINAIRE		

MOUNTING OPTIONS OPTIONS DE MONTAGE

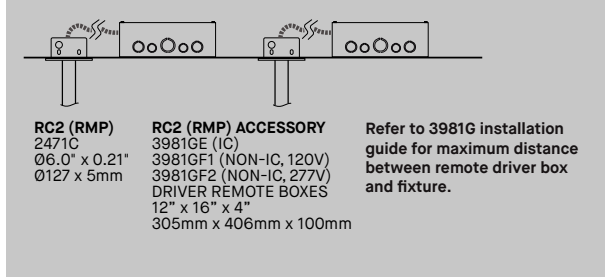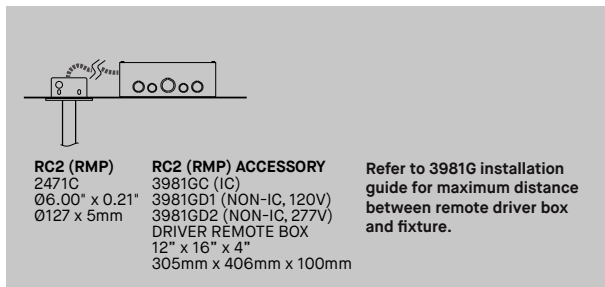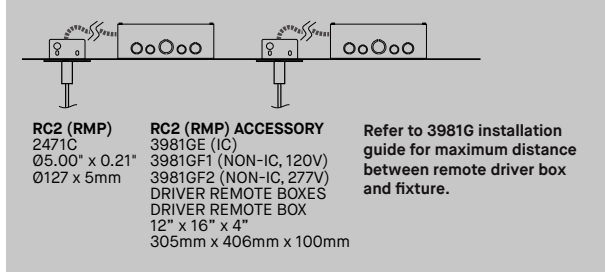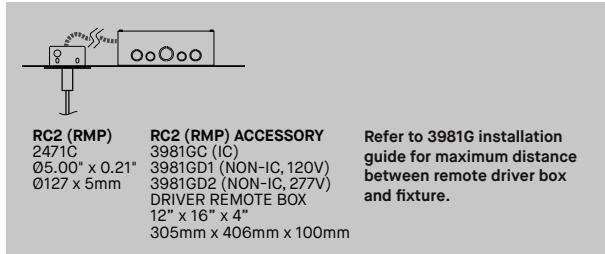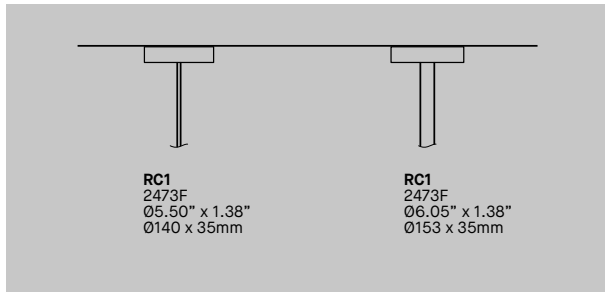

POWER CABLE FINISH FINI CABLE ALIMENTATION

BBC	BLACK BRAIDED CABLE
AWC	ARTIC WHITE BRAIDED CABLE

FIXTURE FINISH FINI LUMINAIRE

BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		

RAL** PLEASE SPECIFY RAL CODE

ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR

FRO	FROST
PRI	PRISMATIC

ACCESSORY ACCESSOIRE

ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING
CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBLTY


3981GC	1 DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD1	1 NON-IC 120V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD2	1 NON-IC 277V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GE	2 DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF1	2 NON-IC 120V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF2	2 NON-IC 277V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"

39NLAA	NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA	NLIGHT WIRED REMOTE CONTROLLER

ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE

3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY
---------------	--

SEGMENT 74510SDX

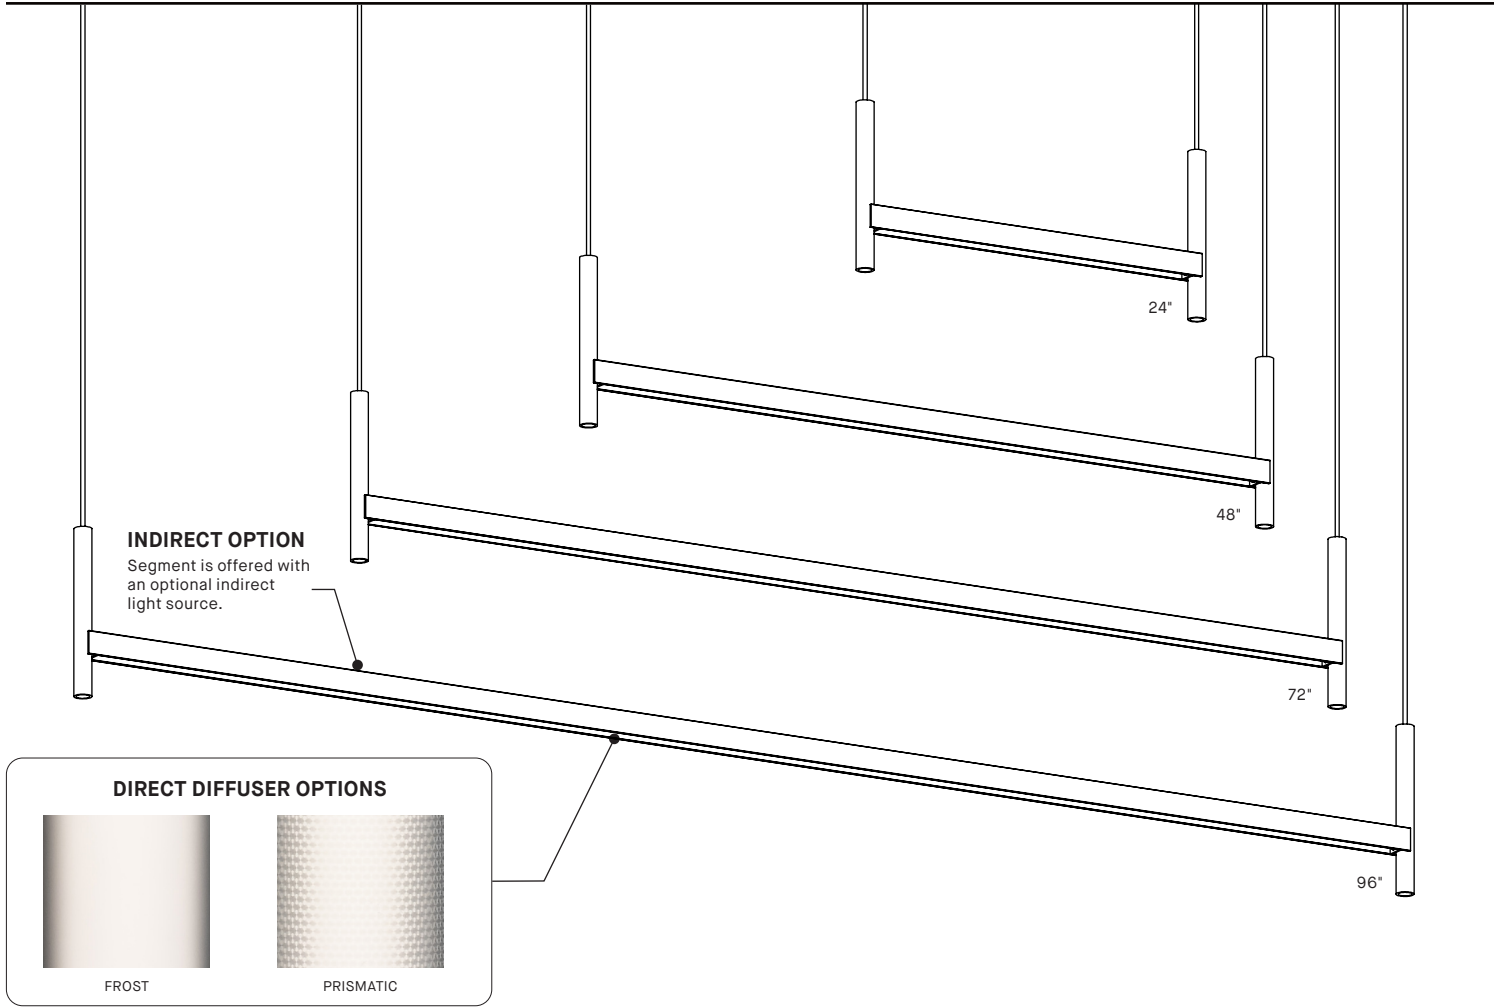


PRODUCT SPECIFICATION	24" DIRECT (PER SECTION)	48" DIRECT (PER SECTION)	72" DIRECT (PER SECTION)	96" DIRECT (PER SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
SYSTEM WATTAGE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 50 W
DELIVERED LUMENS (4000K)	579 — 1154 LM	1157 — 2307 LM	1735 — 3460 LM	2314 — 4615 LM
DELIVERED LUMENS/FOOT (4000K)	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT
EFFICACY	95 — 91 LM/W	95 — 91 LM/W	94 — 90 LM/W	95 — 91 LM/W
	24" INDIRECT (PER SECTION)	48" INDIRECT (PER SECTION)	72" INDIRECT (PER SECTION)	96" INDIRECT (PER SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
SYSTEM WATTAGE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 51 W
DELIVERED LUMENS (4000K)	735 — 1463 LM	1469 — 2925 LM	2203 — 4384 LM	2937 — 5854 LM
DELIVERED LUMENS/FOOT (4000K)	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT
EFFICACY	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W
OTHER INFORMATION				
WEIGHT	~ 4.3 LBS / 2 KG	~ 5.5 LBS / 2.5 KG	~ 7.2 LBS / 3.2 KG	~ 8.4 LBS / 3.8 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

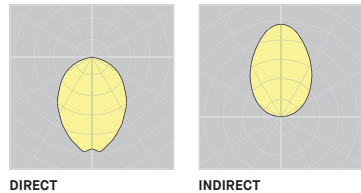


Visit our website for warranty terms and conditions.




TECHNICAL DATA

SEGMENT 74510SDX

CABLE SUSPENSION

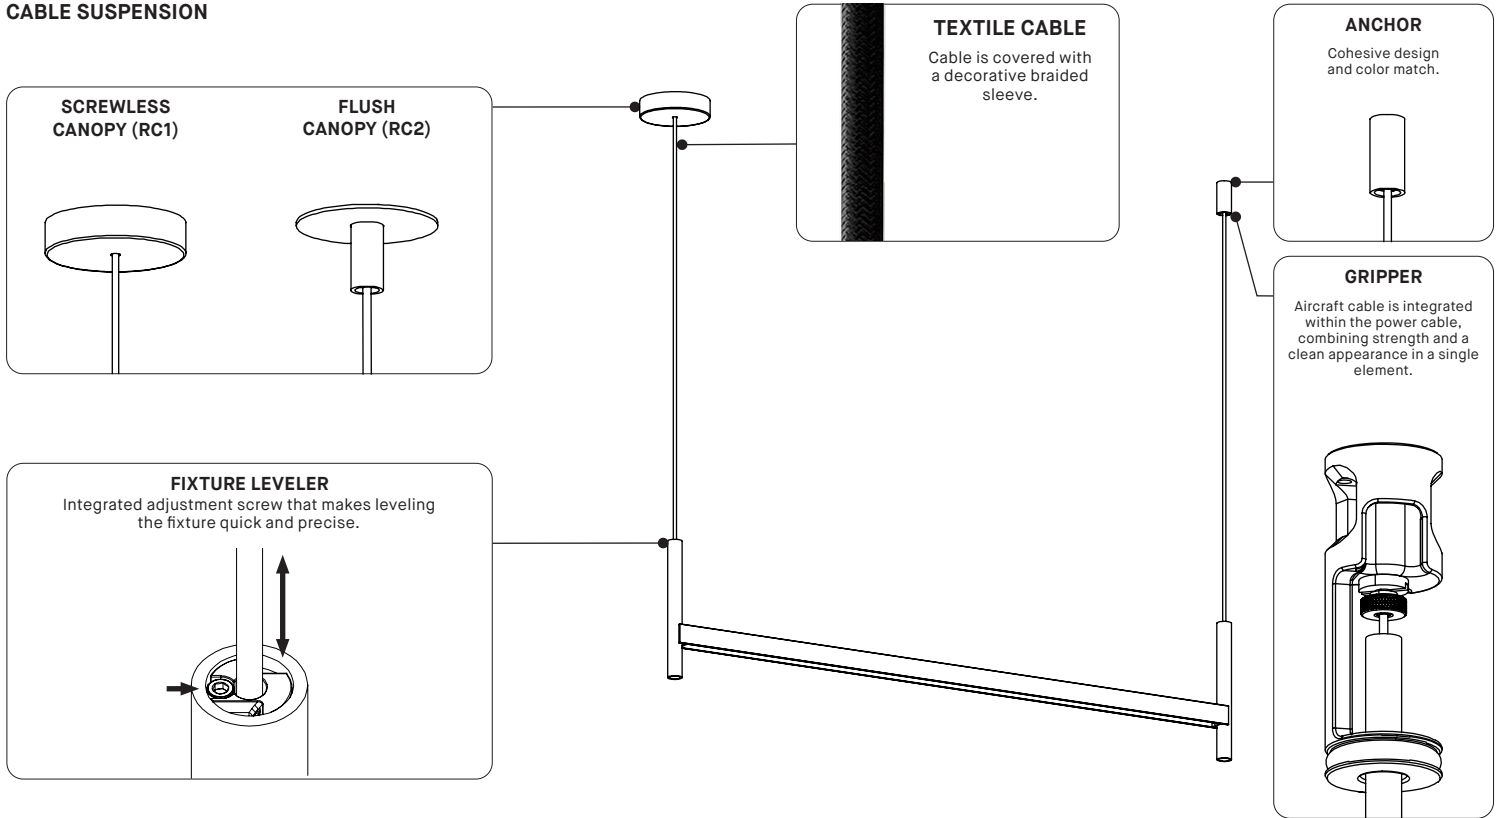


STEM

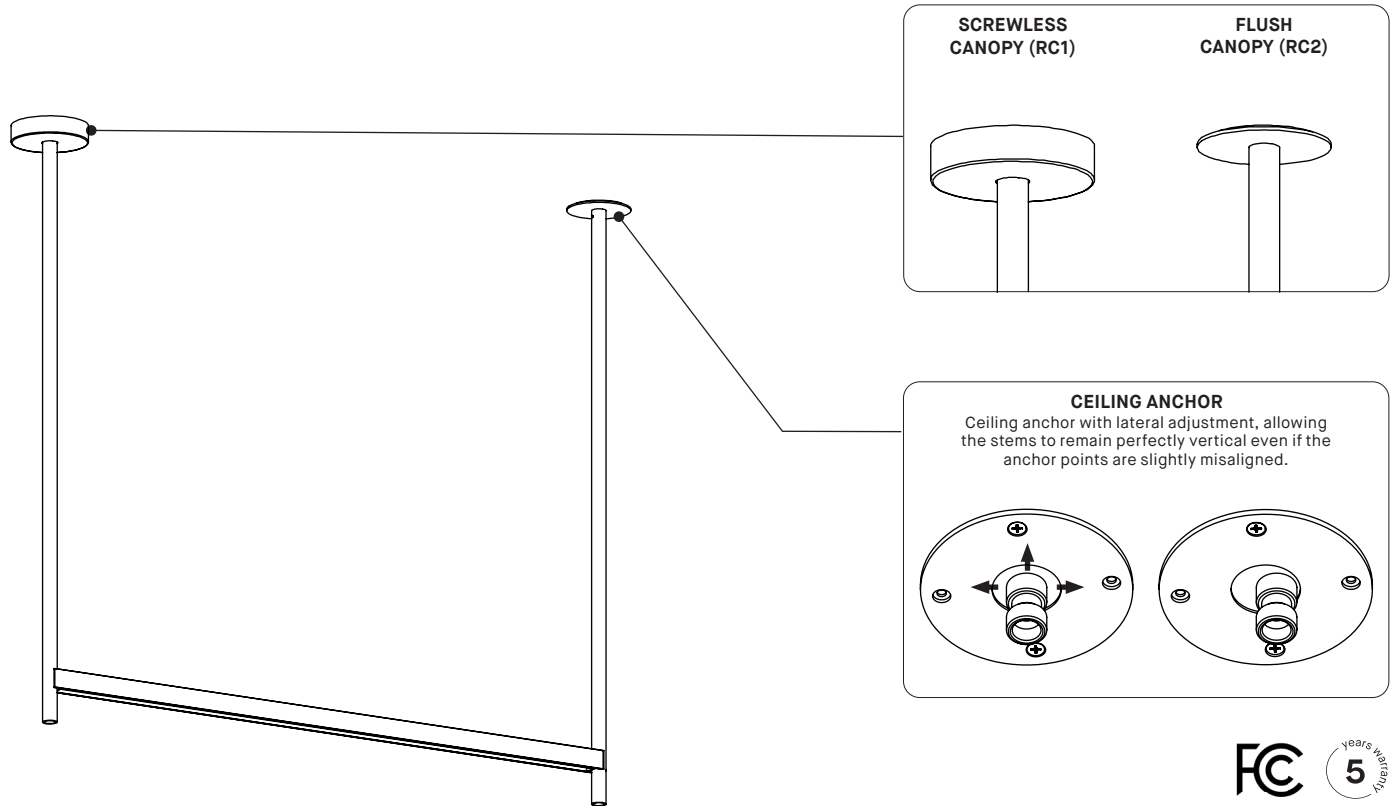

Visit our website for warranty terms and conditions.

SEGMENT 74510SDX

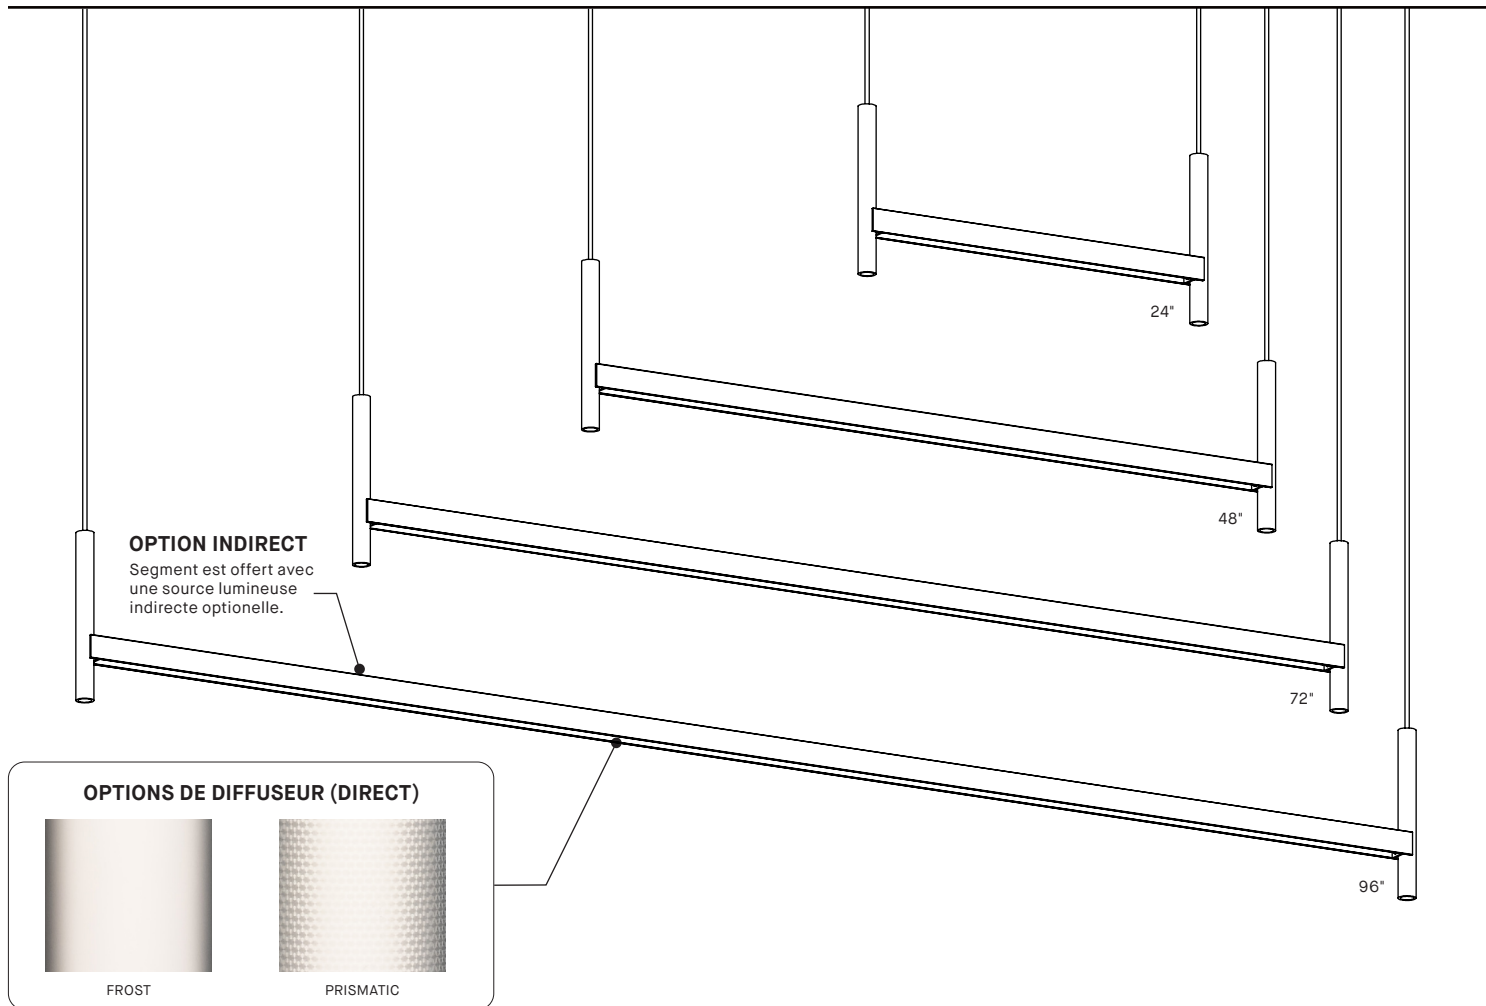

SPECIFICATION DE PRODUIT

	24" DIRECT (PAR SECTION)	48" DIRECT (PAR SECTION)	72" DIRECT (PAR SECTION)	96" DIRECT (PAR SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
PUISSANCE TOTALE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 50 W
LUMENS RÉELS (4000K)	579 — 1154 LM	1157 — 2307 LM	1735 — 3460 LM	2314 — 4615 LM
LUMENS RÉELS PAR PIED (4000K)	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT	289 — 577 LM/FT
EFFICACITÉ	95 — 91 LM/W	95 — 91 LM/W	94 — 90 LM/W	95 — 91 LM/W

	24" INDIRECT (PAR SECTION)	48" INDIRECT (PAR SECTION)	72" INDIRECT (PAR SECTION)	96" INDIRECT (PAR SECTION)
PERFORMANCE	REG — HO	REG — HO	REG — HO	REG — HO
PUISSANCE TOTALE	6 — 13 W	12 — 25 W	18 — 38 W	24 — 51 W
LUMENS RÉELS (4000K)	735 — 1463 LM	1469 — 2925 LM	2203 — 4384 LM	2937 — 5854 LM
LUMENS RÉELS PAR PIED (4000K)	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT	367 — 731 LM/FT
EFFICACITÉ	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W	120 — 115 LM/W


OTHER INFORMATION

POIDS	~ 4.3 LBS / 2 KG	~ 5.5 LBS / 2.5 KG	~ 7.2 LBS / 3.2 KG	~ 8.4 LBS / 3.8 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE

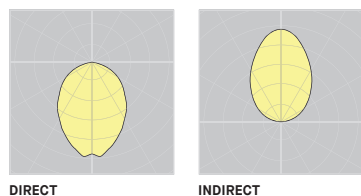


Visitez notre site Web pour les termes et conditions.




DONNÉES TECHNIQUES

SEGMENT 74510SDX




CÂBLE SUSPENSION

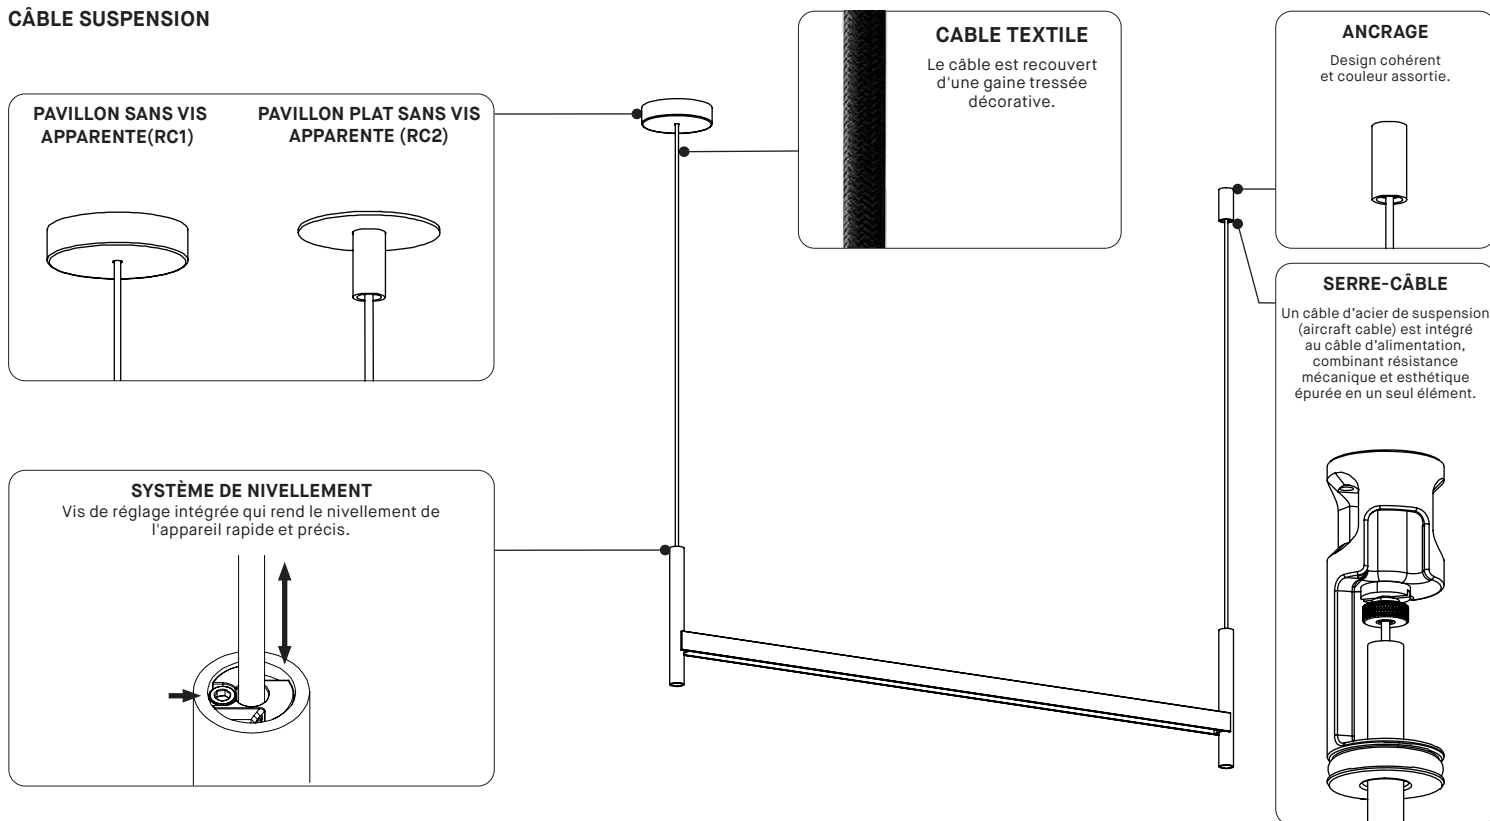

TIGE

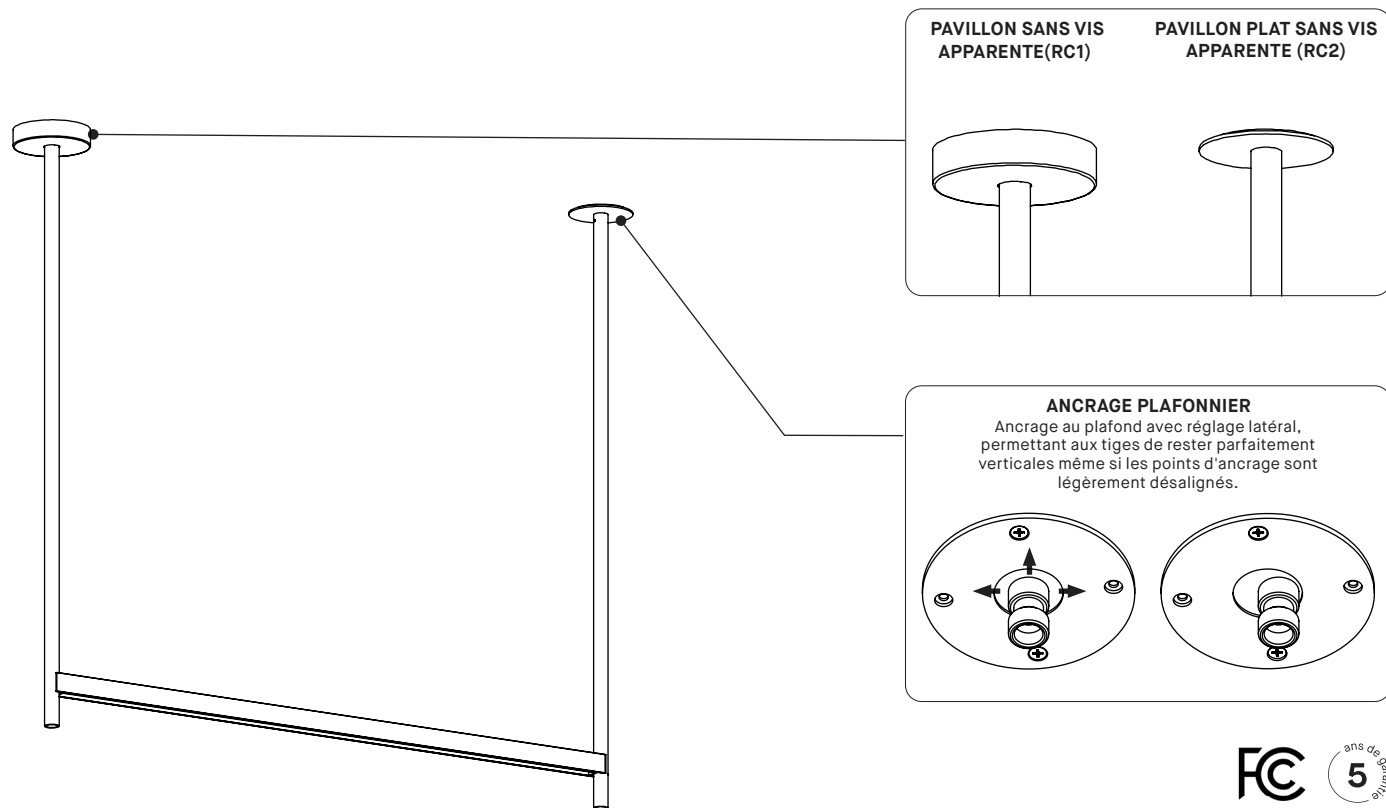

Visitez notre site Web pour les termes et conditions.

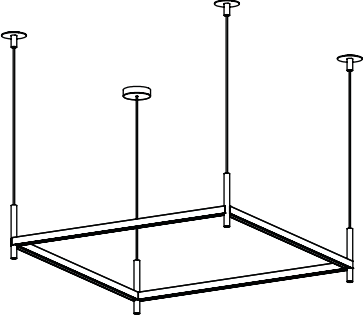FIXTURE  RECTANGLE	CANOPY	
	RC1	RC2
		
	SCREWLESS CANOPY	REMOTE DRIVER(S) FLUSH SCREWLESS CANOPY
0-10V + Phase dimming	0-10V dimming only	
24" X 24" - D - REG	•	3981GC
24" X 24" - D - HO	•	3981GC
24" X 24" - DI - REG	•	3981GC
24" X 24" - DI - HO	•	3981GC
24" X 48" - D - REG	•	3981GC
24" X 48" - D - HO	•	3981GC
24" X 48" - DI - REG	•	3981GC
24" X 48" - DI - HO	•	3981GC
24" X 72" - D - REG	•	3981GC
24" X 72" - D - HO	•	3981GC
24" X 72" - DI - REG	•	3981GC
24" X 72" - DI - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
24" X 96" - D - REG	•	3981GC
24" X 96" - D - HO	•	3981GC
24" X 96" - DI - REG	•	3981GC
24" X 96" - DI - HO	•	IC DOUBLE BOX : 3981GE
48" X 48" - D - REG	•	3981GC
48" X 48" - D - HO	•	3981GC
48" X 48" - DI - REG	•	3981GC
48" X 48" - DI - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
48" X 72" - D - REG	•	3981GC
48" X 72" - D - HO	•	3981GC
48" X 72" - DI - REG	•	3981GC
48" X 72" - DI - HO	•	IC DOUBLE BOX : 3981GE
48" X 96" - D - REG	•	3981GC
48" X 96" - D - HO	•	3981GC
48" X 96" - DI - REG	•	3981GC
48" X 96" - DI - HO	•	IC DOUBLE BOX : 3981GE
72" X 72" - D - REG	•	3981GC
72" X 72" - D - HO	•	3981GC
72" X 72" - DI - REG	•	3981GC
72" X 72" - DI - HO	•	IC DOUBLE BOX : 3981GE
72" X 96" - D - REG	•	3981GC
72" X 96" - D - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
72" X 96" - DI - REG	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
72" X 96" - DI - HO	•	NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)
96" X 96" - D - REG	•	3981GC
96" X 96" - D - HO	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
96" X 96" - DI - REG	•	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
96" X 96" - DI - HO	•	NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)