

ARRAY TULIP - 4425-TUL

PROJECT PROJÉT
SPEC TYPE
NOTES




DIFFUSER DIFFUSEURS




FINISH FINI



POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

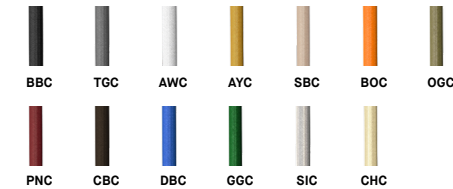

CONFIGURATION OPTIONS OPTION DE CONFIGURATIONS

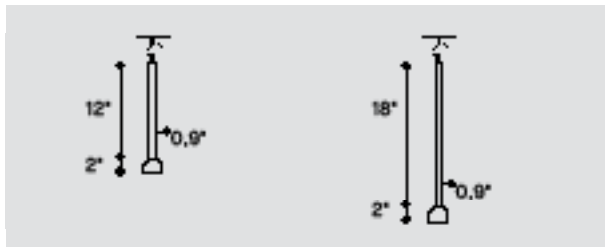

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE


CODE

MODEL MODÈLE			
4425-TUL	ARRAY TULIP		
CONFIGURATION CONFIGURATION			
312L	LEVELED CLUSTER (3 PENDANTS 12")		
318L	LEVELED CLUSTER (3 PENDANTS 18")		
31XL	LEVELED CLUSTER (VARIED LENGTHS, 1 PENDANT 12" + 2 PENDANTS 18")		
312I	INCLINED CLUSTER (3 PENDANTS 12")		
318I	INCLINED CLUSTER (3 PENDANTS 18")		
312V	V-SHAPED CLUSTER (3 PENDANTS 12")		
318V	V-SHAPED CLUSTER (3 PENDANTS 18")		
512L	LEVELED CLUSTER (5 PENDANTS 12")		
518L	LEVELED CLUSTER (5 PENDANTS 18")		
51XL	LEVELED CLUSTER (VARIED LENGTHS, 2 PENDANTS 12" + 3 PENDANTS 18")		
512I	INCLINED CLUSTER (5 PENDANTS 12")		
518I	INCLINED CLUSTER (5 PENDANTS 18")		
512V	V-SHAPED CLUSTER (5 PENDANTS 12")		
518V	V-SHAPED CLUSTER (5 PENDANTS 18")		
DIFFUSER DIFFUSEUR			
BLB	BULB - RECESSED FLAT LENS (BEAM ANGLE 20°)		
BUD	BUD - 1" SMALL DIFFUSER, FROSTED		
BSM	BLOSSOM - 2" LARGE DIFFUSER, FROSTED		
LIGHT SOURCE SOURCE LUMINEUSE			LED
LED	REGULAR OUTPUT		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR			
WDIM	2200K-3000K		
27	2700K (STATIC WHITE)		
30	3000K (STATIC WHITE)		
35	3500K (STATIC WHITE)		
40*	4000K (STATIC WHITE)		
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)			90
90	90+ CRI		
VOLTAGE VOLTAGE			
120V	120 VOLT		
277V	277 VOLT		
CONTROL OPTION OPTION DE CONTRÔLE			
DV	0-10V DIMMING (120V-277V)		
DP	PHASE DIMMING (120V ONLY)		
NLTAIR2*	NLIGHT AIR CONTROL GEN 2		
NLIGHT*	NLIGHT WIRED CONTROL		
	*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT) REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
CABLE LENGTH LONGUEUR DE CÂBLE			
**	OVERALL HEIGHT (PLEASE SPECIFY)		
	** OVERALL HEIGHT (H) IS MEASURED FROM BOTTOM OF THE FIXTURE TO CEILING, IN INCHES CONFIGURATION PATTERN IS SET, ONLY UPPER CABLES ARE INFLUENCED BY OVERALL HEIGHT		
CANOPY FINISH FINI PAVILLON			
BLKE	BLACK		
WHE	WHITE		
MATCH*	COLOR MATCH WITH TUBE FINISH		
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION			
BBC	BASIC BLACK	PNC	PINOT NOIR
BOC	BLOOD ORANGE	SIC	SILVER
DBC	DYNAMIC BLUE	AYC	APRICOT YELLOW
TGC	TITANIUM GRAY	CBC	CHOCOLATE BROWN
OGC	OLIVE GREEN	CHC	CHAMPAGNE
GGC	GRASS GREEN	SBC	SAND BEIGE
AWC	ARCTIC WHITE		
TUBE FINISH FINI TUBE			
BLKE	BLACK	HGE*	HUNTER GREEN
WHE	WHITE	CBE*	CHOCOLATE BROWN
DBE*	DYNAMIC BLUE	STE*	SUMMER TEAL
GGE*	GRASS GREEN	SGE*	SAGE GREY
BRE*	BRICK RED	LNE*	LUNAR GREY
AYE*	APRICOT YELLOW	SIM*	SILVER (GLOSSY)
SBE*	SAND BEIGE	CHM*	CHAMPAGNE (GLOSSY)
CPE*	CLAY PINK	RAL**	PLEASE SPECIFY RAL CODE
NBE*	NAVY BLUE		
	* ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM		
	* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
	** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
ACCESSORY ACCESSOIRE			
	ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER		
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER		



SPECIFICATION

TULIP ARRAY 4425-TUL

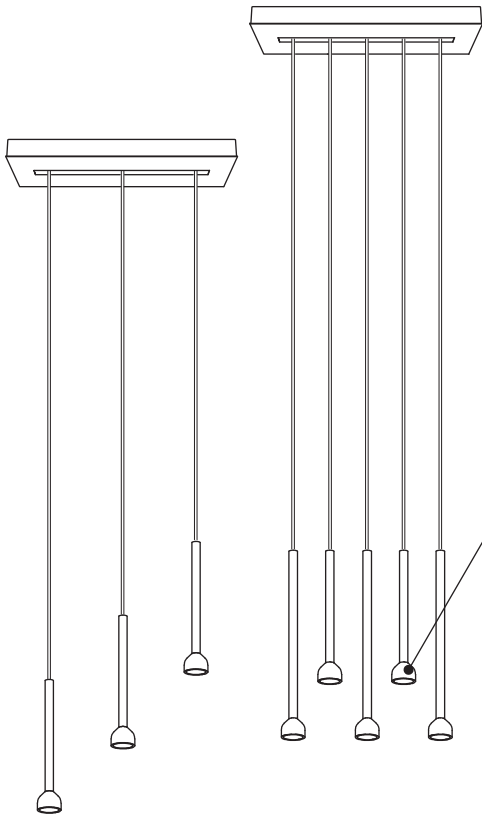

CONFIG. 312S

CONFIG. 618S

OFFERED WITH 3 OR 5 DROPS

Choose amongst the large variety of predefined clusters offers or configure your own.


Specify the total height from the ceiling to the bottom of the fixture, ensuring it meets the configuration's minimum height, and we'll take care of the rest.

TAILORED TUBE LENGTHS


Offered in 12 in and 18 in, Tulip allows refined compositions using single lengths or mixed-tube arrangements.

PERSONALIZE THE LOOK


Choose from three organic diffuser shapes: Bulb, Bud, and Blossom, each inspired by a Tulip's evolving form.

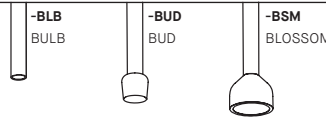

OVERALL DIMENSION

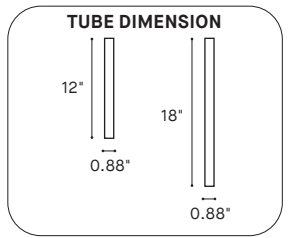

+

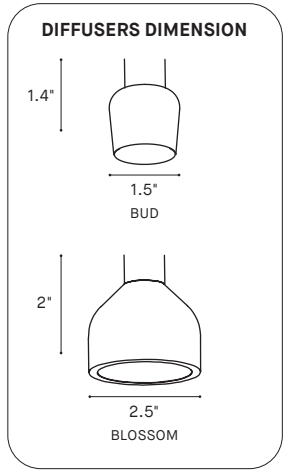

DISCOVER THE FULL TULIP COLLECTION AT EUREKA.COM

DÉCOUVREZ LA COLLECTION TULIP COMPLÈTE SUR EUREKA.COM

PENDANT ALSO AVAILABLE WITH INDIVIDUAL CANOPY

Integrated driver
Ø 5" X 0.2"

- SEE PRODUCT 4191 -

PRODUCT SPECIFICATION

4425-TUL-3
(3 PENDANTS)


4425-TUL-5
(5 PENDANTS)

PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
SYSTEM WATTAGE	10 W	18 W
DELIVERED LUMENS (4000K)	300 — 381 — 441 LM	500 — 635 — 735 LM
EFFICACY	30 — 38 — 44 LM/W	28 — 35 — 41 LM/W
OTHER INFORMATION		
WEIGHT	14 LBS / 6.4 KG	17 LBS / 7.7 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

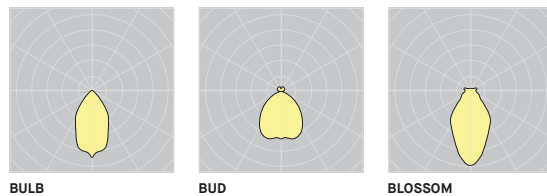

BULB

BUD

BLOSSOM



Visit our website for warranty terms and conditions.



TECHNICAL DATA

TULIP ARRAY 4425-TUL

DIFFUSERS OPTIONS


OVERALL HEIGHT

The minimum overall height has been calculated using the minimum distance of 12" between the canopy and the first tube. For cable distances longer than 180" please contact Eureka.

HAUTEUR TOTALE

La hauteur totale minimale a été calculée en utilisant la distance minimale de 12" entre le pavillon et le premier tube. Pour les distances de câble supérieures à 180", veuillez contacter Eureka.

DIFFUSERS OPTIONS:

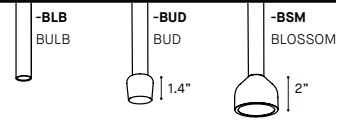

CUSTOM CONFIGURATION

For custom or large-scale configurations, simply contact the factory and we will be pleased to discuss your design requirements.


CONFIGURATION PERSONNALISÉE

Pour des configurations personnalisées ou à grande échelle, veuillez simplement contacter l'usine et nous serons heureux de discuter de vos exigences de conception.

STANDARD CONFIGURATIONS CONFIGURATIONS STANDARDS


312L
Overall Height
Min. 74"/1879mm

Leveled Cluster
3X 12" Pendants

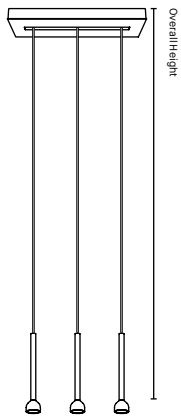


318L
Overall Height
Min. 74"/1879mm

Leveled Cluster
3X 18" Pendants

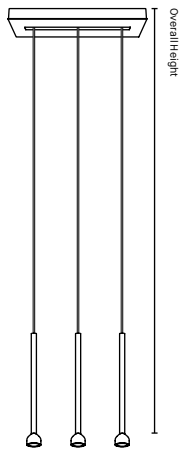


31XL
Overall Height
Min. 74"/1879mm

Leveled Cluster
1X 18" + 2x 12" Pendants

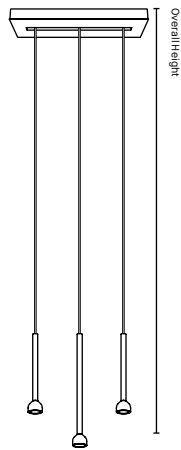


312I
Overall Height
Min. 74"/1879mm

Inclined Cluster
3x 12" Pendants

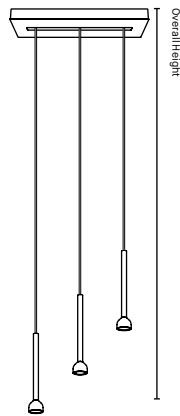


318I
Overall Height
Min. 74"/1879mm

Inclined Cluster
3X 18" Pendants

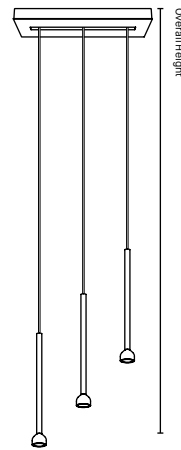


312V
Overall Height
Min. 74"/1879mm

V-Shaped Cluster
3X 12" Pendants

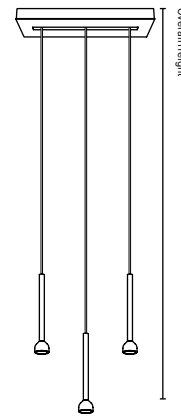


318V
Overall Height
Min. 74"/1879mm

V-Shaped Cluster
3X 18" Pendants

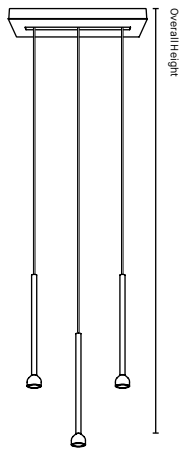


512L
Overall Height
Min. 74"/1879mm

Leveled Cluster
5X 12" Pendants

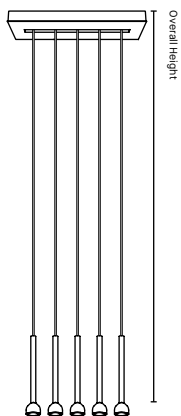


518L
Overall Height
Min. 74"/1879mm

Leveled Cluster
5X 18" Pendants

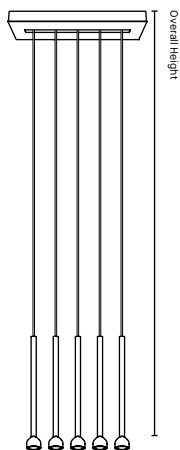


51XL
Overall Height
Min. 74"/1879mm

Leveled Cluster
3X 18" + 2x 12" Pendants

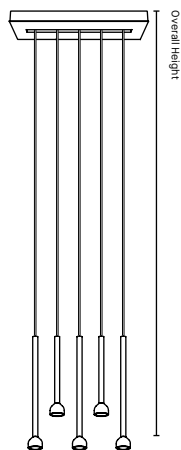


512I
Overall Height
Min. 74"/1879mm

Inclined Cluster
5x 12" Pendants

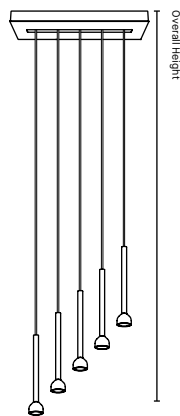


518I
Overall Height
Min. 74"/1879mm

Inclined Cluster
5X 18" Pendants

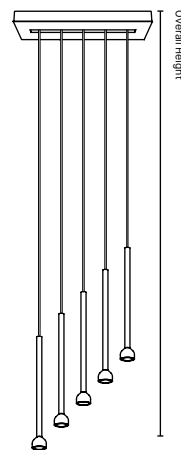

512V
Overall Height
Min. 74"/1879mm

V-Shaped Cluster
5X 12" Pendants

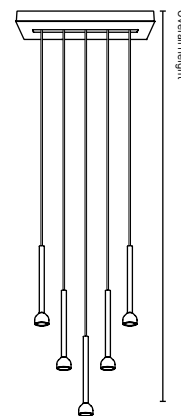

518V
Overall Height
Min. 74"/1879mm

V-Shaped Cluster
5X 18" Pendants

