

TUMBLER 3409

PROJECT PROJÉT

SPEC TYPE

NOTES



FINISH FINI




FAMILY FAMILLE



3409 (CEILING SURFACE)

4009

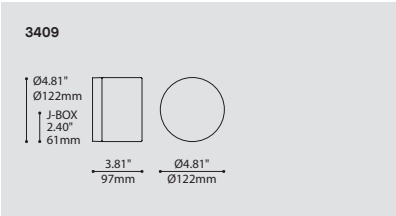

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		3409
3409	TUMBLER	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DP	PHASE DIMMING (120V ONLY)	
DV	0-10V DIMMING (120V-277V)	
FINISH FINI		
BLKE	BLACK	CBE* CHOCOLATE BROWN
WHE	WHITE	CPE* CLAY PINK
CHM**	CHAMPAGNE METALLIC	DBE* DYNAMIC BLUE
SIM**	SILVER METALLIC	GGE* GRASS GREEN
AYE*	APRICOT YELLOW	HGE* HUNTER GREEN
BRE*	BRICK RED	LNE* LUNAR GREY
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
** NOT AVAILABLE FOR OUTDOOR INSTALLATION		
PRE-FINISH OPTION OPTION PRÉ-FINI		
MG	MARINE GRADE FINISH	
* NOT AVAILABLE WITH CHM & SIM FINISH.		
DIFFUSER FINISH FINI DIFFUSEUR		
CFR	CLEAR-FROSTED	
CFRA	CLEAR-FROSTED ACRYLIC	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR DIMMING OPTION)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	Tumbler is a small jewel made from tough machined glass. Its crisp, minimal form provides seamless accent illumination for any indoor or outdoor environment.
LIGHT SOURCE:	A highly powerful COB light source. Tumbler has an integral aluminum heatsink conceived and tested to provide a long lifetime.
CANOPY:	Die-cast aluminum base, available in 14 textured finishes and 2 metallic finishes (indoor use only).
DIFFUSER:	Designed to be both beautiful and durable, Tumbler is a machined heavy glass with an inside frosted surface for better diffusion. An acrylic version is available (indoor use only).
CERTIFIED:	CSA Listed to US and Canadian safety standards; 25°C ambient. Tumbler can be used to comply with the requirements in 2022 Title 24, Part 6 JA8 High Luminous Efficacy Luminaire Requirements.
CONCEPTION:	Le Tumbler est un petit bijou fait de verre machiné robuste. Sa forme géométrique minimaliste procure une lumière ambiante diffuse qui réhausse tout environnement intérieur ou extérieur.
SOURCE LUMINEUSE:	Une source lumineuse munie d'un COB très puissant. Le Tumbler intègre un dissipateur de chaleur testé pour prolonger sa durée de vie.
PAVILLON:	Base en aluminium moulé sous pression, disponible avec 14 choix de finitions texturées et 2 options de finis métalliques (usage intérieur uniquement).
DIFFUSEUR:	Conçu pour être à la fois beau et durable, le Tumbler est machiné à même un bloc de verre et est ensuite givré à l'intérieur pour une meilleure diffusion. Une version en acrylique est offerte (application intérieur seulement).
CERTIFIÉ:	Homologué CSA aux standards UL Canada et É.-U. - Température 25°C. Tumbler peut être utilisé pour se conformer aux exigences de la norme Title 24 de 2022, Partie 6 JA8 concernant les luminaires à haute efficacité lumineuse.

TUMBLER 3409

QUICKSHIP

PROJECT PROJÉT

SPEC TYPE

NOTES




FINISH FINI



FAMILY FAMILLE



3409 (CEILING SURFACE)

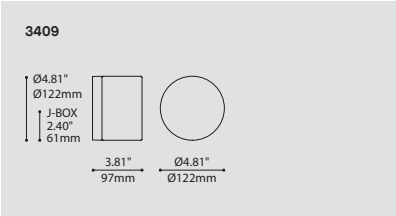


ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
QUICKSHIP		
QS5	QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS	QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
QS10	QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS	QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS
MODEL MODÈLE	3409	
3409	TUMBLER	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
30	3000K	
35	3500K	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	90	
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DP	PHASE DIMMING (120V ONLY)	
DV	0-10V DIMMING (120V-277V)	
	*3983 ACCESSORY IS PROVIDED FOR DIMMING OPTION	
FINISH FINI	BLKE	
BLKE	BLACK	
DIFFUSER FINISH FINI DIFFUSEUR		
CFR	CLEAR-FROSTED	
CFRA	CLEAR-FROSTED ACRYLIC	
ACCESSORY ACCESSOIRE		
3983	DEEP JUNCTION BOX (PROVIDED FOR DIMMING OPTION)	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	Tumbler is a small jewel made from tough machined glass. Its crisp, minimal form provides seamless accent illumination for any indoor or outdoor environment.
LIGHT SOURCE:	A highly powerful COB light source. Tumbler has an integral aluminum heatsink conceived and tested to provide a long lifetime.
CANOPY:	Die-cast aluminum base.
DIFFUSER:	Designed to be both beautiful and durable, Tumbler is a machined heavy glass with an inside frosted surface for better diffusion. An acrylic version is available (indoor use only).
CERTIFIED:	CSA Listed to US and Canadian safety standards; 25°C ambient. Tumbler can be used to comply with the requirements in 2022 Title 24, Part 6 JA8 High Luminous Efficacy Luminaire Requirements.
CONCEPTION:	Le Tumbler est un petit bijou fait de verre machiné robuste. Sa forme géométrique minimaliste procure une lumière ambiante diffuse qui réhausse tout environnement intérieur ou extérieur.
SOURCE LUMINEUSE:	Une source lumineuse munie d'un COB très puissant. Le Tumbler intègre un dissipateur de chaleur testé pour prolonger sa durée de vie.
PAVILLON:	Base en aluminium moulé sous pression.
DIFFUSEUR:	Conçu pour être à la fois beau et durable, le Tumbler est machiné à même un bloc de verre et est ensuite givré à l'intérieur pour une meilleure diffusion. Une version en acrylique est offerte (application intérieur seulement).
CERTIFIÉ:	Homologué CSA aux standards UL Canada et É.-U. - Température 25°C. Tumbler peut être utilisé pour se conformer aux exigences de la norme Title 24 de 2022, Partie 6 JA8 concernant les luminaires à haute efficacité lumineuse.

TUMBLER 3409

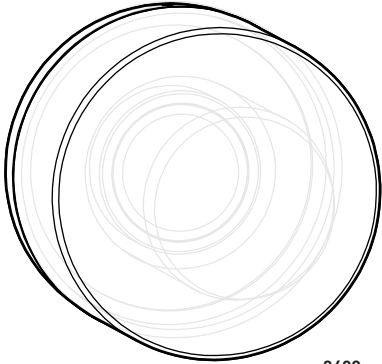


3409
TUMBLER


IP 65 UL WET

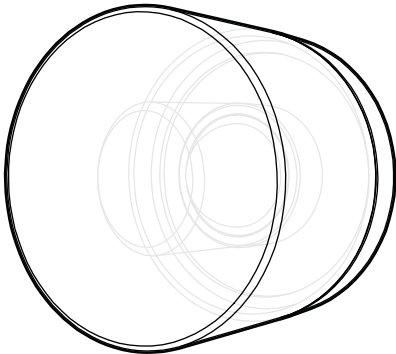

Ø4.81"
Ø122mm



Ø4.81"
Ø122mm




Ø3.81"
Ø97mm

PRECIOUS JEWEL
Its crisp, minimal form provides seamless accent illumination for any indoor or outdoor environment

BEAUTIFUL AND DURABLE
The Tumbler is composed of a machined heavy glass with an inside frosted surface for better diffusion. An acrylic version is available (indoor use only)

INTERNAL OPTICAL DIFFUSER
High quality silicone diffuser

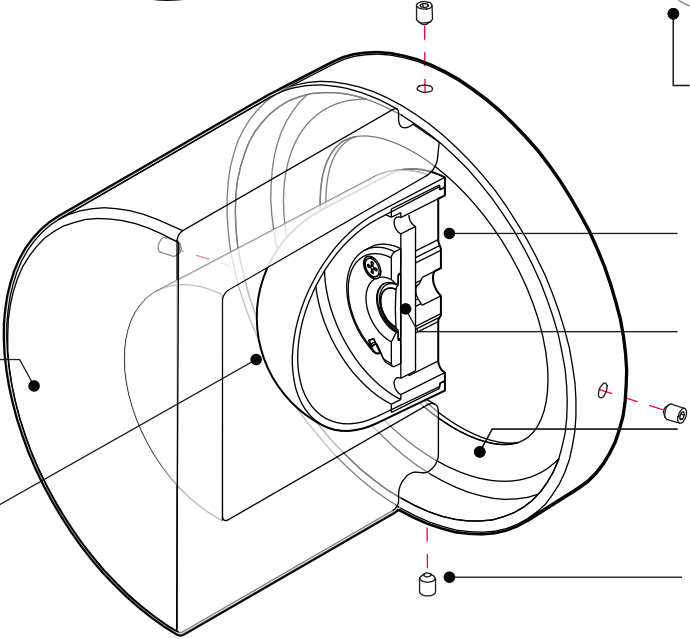

ELECTRICAL BOX
A deep junction box (supplied) is required.

INTEGRATED HEATSINK
Machined aluminum heatsink tested to assure a long lifetime

POWERFUL SOURCE
The LED light source composed of a powerful COB is offered in 2 outputs.

WEATHERPROOF
Self-adhesive gaskets
Precision die cast aluminum backplate
Exterior grade finish


EASY AND SECURE
Glass held in place with 4 stainless steel set screws, for easy installation

PRODUCT SPECIFICATION	3409 CFR		3409 CFRA (ACRYLIC)	
	REG	HO	REG	HO
PERFORMANCE				
SYSTEM WATTAGE	3.7 W	7.9 W	3.7 W	7.9 W
DELIVERED LUMENS (4000K)	399 LM	801 LM	399 LM	801 LM
EFFICACY	107 LM/W	102 LM/W	107 LM/W	102 LM/W
OTHER INFORMATION				
DIFFUSER	CLEAR MACHINED GLASS WITH INSIDE FROSTED	CLEAR MACHINED GLASS WITH INSIDE FROSTED	CLEAR MACHINED ACRYLIC WITH INSIDE FROSTED	CLEAR MACHINED ACRYLIC WITH INSIDE FROSTED
LUMINAIRE'S WEIGHT	5.0 LBS / 2.26 KG	5.0 LBS / 2.26 KG	2.8 LBS / 1.27 KG	2.8 LBS / 1.27 KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.94
90+	2700K	0.90

LIGHT DISTRIBUTION

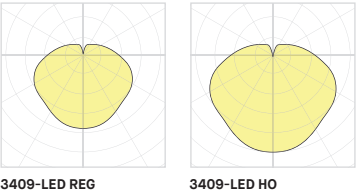







Visit our website for warranty terms and conditions.

TUMBLER 3409

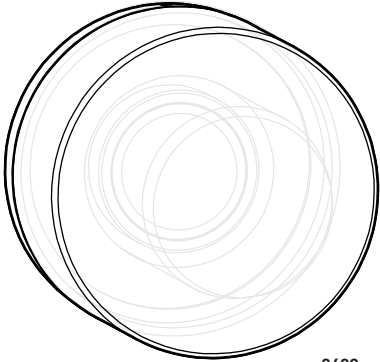


3409
TUMBLER


IP 65 UL WET

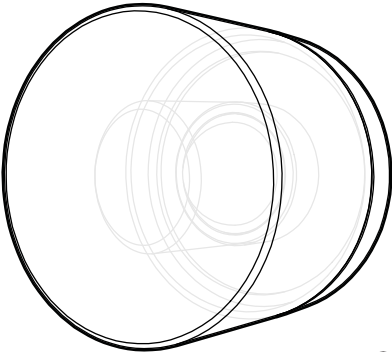


Ø4.81"
Ø122mm



Ø4.81"
Ø122mm



Ø3.81"
Ø97mm

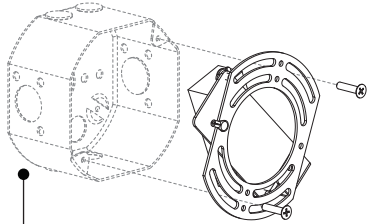

BOITE ELECTRIQUE
Une boîte de connexion profonde (fournie) est nécessaire.

TEL UN BIJOU
Sa forme géométrique minimaliste procure une lumière ambiante diffuse qui rehausse tout environnement intérieur ou extérieur

BEAU ET DURABLE
Le Tumbler est machiné à même un bloc de verre et est ensuite givré à l'intérieur pour une meilleure diffusion. Une version en acrylique est offerte (application intérieur seulement)

DIFFUSEUR INTERNE
Diffuseur en silicone de haute qualité

DISSIPATEUR INTÉGRÉ
Dissipateur de chaleur fait d'aluminium machiné et testé pour prolonger la durée de vie du produit

SOURCE PUISSANTE
La source lumineuse est composée d'un COB puissant, offert en 2 intensités

RÉSISTE AUX INTEMPÉRIES
Joints d'étanchéité autocollants
Plaque ronde en aluminium moulé
Finition de grade extérieur

AJUSTABLE ET SÉCURE
L'installation du verre est faite à l'aide de 4 vis de serrage en acier inoxydable


SPÉCIFICATION PRODUIT

	3409 CFR		3409 CFRA (ACRYLIQUE)	
	REG	HO	REG	HO
PERFORMANCE				
PUISSANCE TOTALE	3.7 W	7.9 W	3.7 W	7.9 W
LUMENS RÉELS (4000K)	399 LM	801 LM	399 LM	801 LM
EFFICACITÉ	107 LM/W	102 LM/W	107 LM/W	102 LM/W
AUTRES INFORMATIONS				
DIFFUSEUR	VERRE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	VERRE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	ACRYLIQUE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ	ACRYLIQUE TRANSPARENT MACHINÉ AVEC INTÉRIEUR GIVRÉ
POIDS DU LUMINAIRE	5.0 LBS / 2.26 KG	5.0 LBS / 2.26 KG	2.8 LBS / 1.27 KG	2.8 LBS / 1.27 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS	> 60 000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.94
90+	2700K	0.90

DISTRIBUTION LUMINEUSE

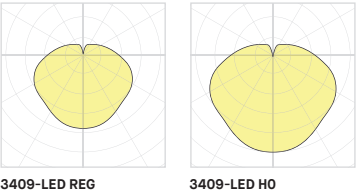



Visitez notre site Web pour les termes et conditions.