

# AREA 4715

PROJECT PROJÉT
SPEC TYPE
NOTES



## FINISH FINI



BLKE

WHE

LGE

## FAMILY FAMILLE



4715 (WALL SURFACE)

4815X


4716 (CEILING SURFACE)



4720 (WALL SURFACE)

4820

4721 (CEILING SURFACE)

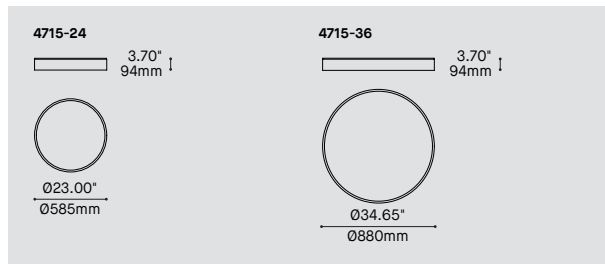

## ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE	
4715-24	AREA 24"
4715-36	AREA 36"

LIGHT SOURCE SOURCE LUMINEUSE	
LED.LO	LOW OUTPUT
LED	REGULAR OUTPUT
LED.HO	HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
27	2700K
30	3000K
35	3500K
40*	4000K
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	

VOLTAGE VOLTAGE	
120V	120 VOLT
277V	277 VOLT

DIMMING OPTION OPTION DE GRADATION	
DV	0-10V DIMMING (120V-277V)
DP	PHASE DIMMING (120V ONLY)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2
NLIGHT*	NLIGHT WIRED CONTROL
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWA FOR NLIGHT). * EMERGENCY BATTERY NOT AVAILABLE WITH NLIGHT OPTIONS REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.	

EMERGENCY BATTERY BATTERIE D'URGENCE	
EM	EMERGENCY BATTERY

HOUSING FINISH FINI BOITIER	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
LGE	LIGHT GREY FINE TEXTURE
RAL*	PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

ACCESSORY ACCESSOIRE	
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING	
39NLAB*	NLIGHT AIR GEN 2 REMOTE POWER PACK
39NLWA*	NLIGHT WIRED REMOTE POWER PACK
*FOR CHICAGO PLENUM INSTALLATION. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	Large format, functional and elegant round surface mounted fixtures in Ø24" and Ø36".
<b>LIGHT SOURCE:</b>	High performance LED modules with standard 0-10V or phase dimming driver integrated within the fixture.
<b>HOUSING:</b>	Aluminium extrusion frame and die-formed steel backplate with polyester powder finish.
<b>DIFFUSER:</b>	High performance white translucent PMMA.
<b>CERTIFIED:</b>	c-CSA-us

<b>CONCEPTION:</b>	Grand format fonctionnel et élégant, ce plafonnier rond est offert en Ø24" and Ø36".
<b>SOURCE LUMINEUSE:</b>	Modules de DEL hautes performances avec un convertisseur à gradation 0-10v ou phase intégré dans le luminaire.
<b>BOITIER:</b>	Cadre d'aluminium extrudé et plaque d'acier découpé puis plié, avec peinture électrostatique à base de polyester.
<b>DIFFUSEUR:</b>	PMMA translucide blanc haute performance usiné.
<b>CERTIFIÉ:</b>	c-CSA-us

# AREA 4715

QUICKSHIP

PROJECT PROJET

SPEC TYPE

NOTES

4715-24



4715-36



FAMILY FAMILLE



4715 (WALL SURFACE)



4815X



4716 (CEILING SURFACE)



4720 (WALL SURFACE)




4820



4721 (CEILING SURFACE)

4715-24



Ø23.00"  
Ø585mm

4715-36



Ø34.65"  
Ø880mm

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS  
QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4715-24 AREA 24"  
4715-36 AREA 36"

LIGHT SOURCE SOURCE LUMINEUSE

LED.LO LOW OUTPUT  
LED REGULAR OUTPUT  
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K  
35 3500K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

90 90+ CRI

90

VOLTAGE VOLTAGE

120V 120 VOLT  
277V 277 VOLT

DIMMING OPTION OPTION DE GRADATION

DV 0-10V DIMMING (120V-277V)  
DP PHASE DIMMING (120V ONLY)

HOUSING FINISH FINI BOITIER

WHE WHITE FINE TEXTURE

WHE

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE

WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED


**DESIGN:** Large format, functional and elegant round surface mounted fixtures in Ø24" and Ø36".  
**LIGHT SOURCE:** High performance LED modules with standard 0-10V or phase dimming driver integrated within the fixture.  
**HOUSING:** Aluminium extrusion frame and die-formed steel backplate with polyester powder finish.  
**DIFFUSER:** High performance white translucent PMMA.  
**CERTIFIED:** c-CSA-us

**CONCEPTION:** Grand format fonctionnel et élégant, ce plafonnier rond est offert en Ø24" and Ø36".  
**SOURCE LUMINEUSE:** Modules de DEL hautes performances avec un convertisseur à gradation 0-10v ou phase intégré dans le luminaire.

**BOITIER:** Cadre d'aluminium extrudé et plaque d'acier découpé puis plié, avec peinture électrostatique à base de polyester.

**DIFFUSEUR:** PMMA translucide blanc haute performance usiné.  
**CERTIFIÉ:** c-CSA-us


# AREA 4715

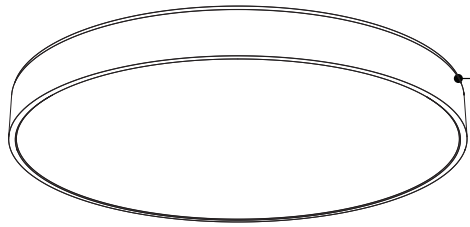


**SIMPLE AND CLEAN HOUSING**  
Precision welded aluminium extrusion  
Clean geometry on the outside,  
structural details on the inside

**SHADOW LINE**  
Built-in shadow line for a clean install,  
compensates for uneven ceiling surfaces


**LENS**  
High performance frosted acrylic lens  
for superior light transmission

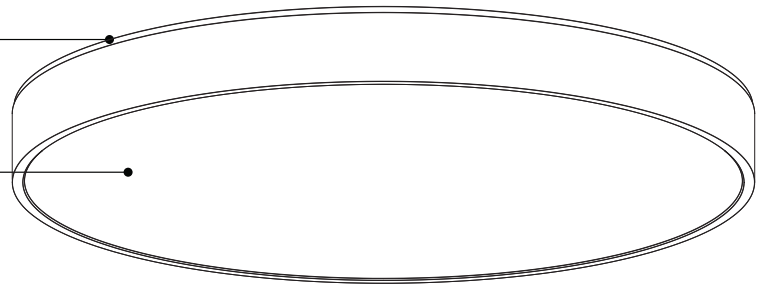

4715-36



4715-24



4715-36



Also available in acoustic version  
See product 4716

## PRODUCT SPECIFICATION

### 4715-24


### 4715-36

PERFORMANCE	LO/REG/HO	LO/REG/HO
SYSTEM WATTAGE	17.3W / 35.8W / 44.5W	38.2W / 86.7W / 110.1W
DELIVERED DIRECT LUMENS (4000K)	1876LM / 3400LM / 4120LM	4394LM / 8673LM / 10701LM
EFFICACY	95LM/W	100LM/W
OTHER INFORMATIONS		
WEIGHT	12.5LBS / 5.7KG	33.5LBS / 15.2KG
L70 (LUMEN MAINTENANCE)	> 60 000 HRS	> 60 000 HRS
MAX. LUMINANCE 45°-90° OF NADIR	3529 CD/M <sup>2</sup> (HO)	3936 CD/M <sup>2</sup> (HO)
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)	R9 > 50 (90 CRI OPTION)

## EFFICACY MULTIPLIERS

## LIGHT DISTRIBUTION

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.92
90+	2700K	0.87




4715-XX



Visit our website for warranty terms and conditions.



## TECHNICAL DATA

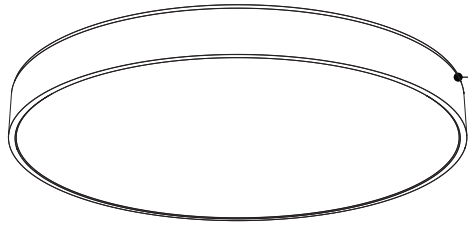


### BOÎTIER SOBRE

Extrusion d'aluminium soudée avec précision  
Lignes nettes et modernes à l'extérieur,  
détails structuraux cachés à l'intérieur


**JOINT CREUX**  
Léger retour intégré au boîtier pour une  
installation propre, compense pour les  
surfaces de plafond irrégulières

**LENTILLE**  
Lentille d'acrylique givrée haute performance  
permet une transmission optique supérieure

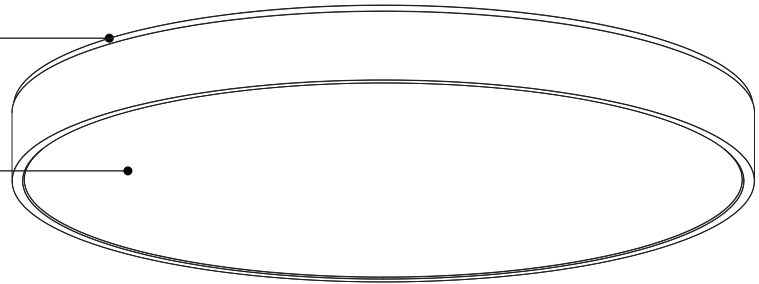


4715-36

3.70"  
94mm



4715-24

3.70"  
94mm



4715-36



Aussi disponible en version acoustique  
Voir le produit 4716

## SPÉCIFICATION PRODUIT

### 4715-24


### 4715-36

PERFORMANCE	LO/REG/HO	LO/REG/HO
PUISSANCE TOTALE	17.3W / 35.8W / 44.5W	38.2W / 86.7W / 110.1W
LUMENS RÉELS INDIRECT (4000K)	1876LM / 3400LM / 4120LM	4394LM / 8673LM / 10701LM
EFFICACITÉ	95LM/W	100LM/W
AUTRES INFORMATIONS		
POIDS	12.5LBS / 5.7KG	33.5LBS / 15.2KG
L70 (MAINTENANCE DE LA LUMIÈRE)	> 60 000 H	> 60 000 H
MAX. LUMINANCE 45°-90° NADIR	3259 CD/M² (HO)	3936 CD/M² (HO)
QUALITÉ DE LA LUMIÈRE	R9 > 50 (OPTION 90 IRC)	R9 > 50 (OPTION 90 IRC)

## FACTEURS D'EFFICACITÉ

## DISTRIBUTION LUMINEUSE

CRI	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.96
90+	3000K	0.92
90+	2700K	0.87



4715-XX



VisiteznotresiteWebpourlestermesetconditions.