


AREA 4715

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI

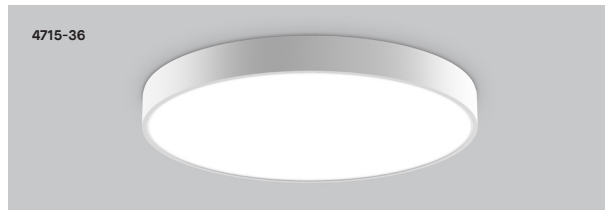

BLKE WHE LGE


FAMILY FAMILLE



4715 (WALL SURFACE) 4815X 4716 (CEILING SURFACE)



4720 (WALL SURFACE) 4820 4721 (CEILING SURFACE)

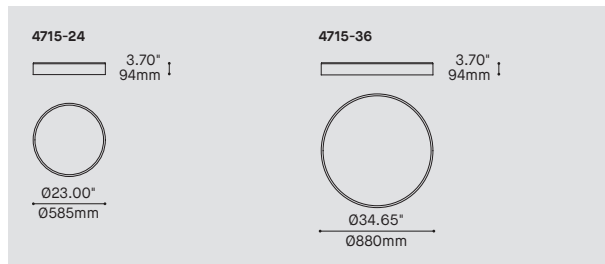

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

4715-24 AREA 24"
4715-36 AREA 36"

LIGHT SOURCE SOURCE LUMINEUSE

LED REGULAR OUTPUT
LED.HO HIGH OUTPUT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR (A)

27* 2700K
30 3000K
35 3500K
40 4000K
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI
90* 90+ CRI
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

VOLTAGE VOLTAGE

120V 120 VOLT
277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
DP PHASE DIMMING (120V ONLY)
NA* NLIGHT AIR CONTROL
NW NLIGHT WIRED CONTROL
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE
* REQUIRES REMOTE BOX (3985)

EMERGENCY BATTERY BATTERIE D'URGENCE

EM EMERGENCY BATTERY

HOUSING FINISH FINI BOITIER

BLKE BLACK FINE TEXTURE
WHE WHITE FINE TEXTURE
LGE LIGHT GRAY FINE TEXTURE
RAL* PLEASE SPECIFY RAL CODE
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE WH

ACCESSORY ACCESSOIRE

3985 REMOTE BOX FOR NLIGHT CONTROL


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Large format, functional and elegant round surface mounted fixtures in Ø24" and Ø36".
LIGHT SOURCE: High performance LED modules with standard 0-10v or phase dimming driver integrated within the fixture.
STRUCTURE: Aluminum extrusion frame and die-formed steel backplate with polyester powder finish.
DIFFUSER: High performance white translucent PMMA.
CERTIFIED: c-CSA-us

CONCEPTION: Grand format fonctionnel et élégant, ce plafonnier rond est offert en Ø24" et Ø36".
SOURCE LUMINEUSE: Modules de DEL hautes performances avec un convertisseur à gradation 0-10v ou phase intégré dans le luminaire.
STRUCTURE: Cadre d'aluminium extrudé et plaque d'acier découpé puis plié, avec peinture électrostatique à base de polyester.
DIFFUSEUR: PMMA translucide blanc haute performance.
CERTIFIÉ: c-CSA-us


AREA 4715

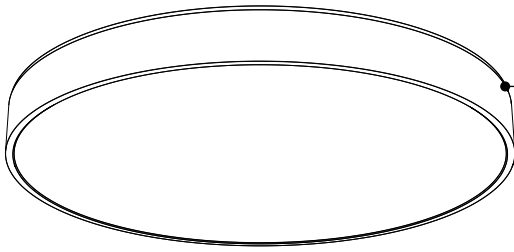


SIMPLE AND CLEAN HOUSING
Precision welded aluminium extrusion
Clean geometry on the outside,
structural details on the inside

SHADOW LINE
Built-in shadow line for a clean install,
compensates for uneven ceiling surfaces


LENS
High performance frosted acrylic lens
for superior light transmission

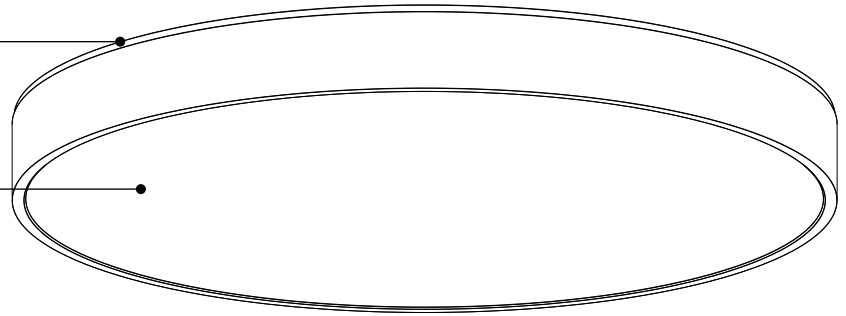

4715-36



4715-24



4715-36



Also available in acoustic version
See product 4716

PRODUCT SPECIFICATION

4715-24

4715-36

PERFORMANCE

SYSTEM WATTAGE	35.8W / 44.5W	86.7W / 110.1W
DELIVERED DIRECT LUMENS (4000K)	3864LM / 4682LM	9856LM / 12161LM
EFFICACY	108LM/W	114LM/W


OTHER INFORMATION

WEIGHT	12.5LBS / 5.7KG	33.5LBS / 15.2KG
--------	-----------------	------------------

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION




4715-XX



Visit our website for warranty terms and conditions.



TECHNICAL DATA

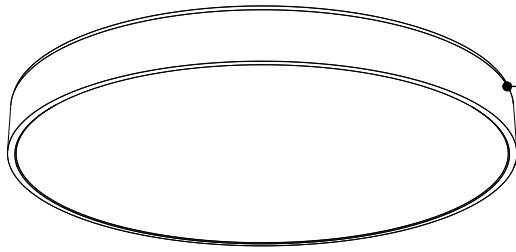

BOÎTIER SOBRE


Extrusion d'aluminium soudée avec précision
Lignes nettes et modernes à l'extérieur,
détails structuraux cachés à l'intérieur

JOINT CREUX


Léger retour intégré au boîtier pour une
installation propre, compense pour les
surfaces de plafond irrégulières

LENTILLE


Lentille d'acrylique givrée haute performance
permet une transmission optique supérieure

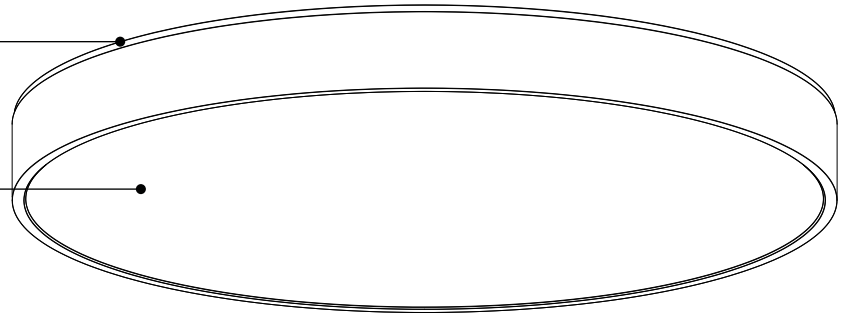

4715-36



4715-24



4715-36



Aussi disponible en version acoustique
Voir le produit 4716

SPÉCIFICATION PRODUIT

4715-24

4715-36

PERFORMANCE

PERFORMANCE	4715-24	4715-36
PUISSANCE TOTALE	35.8W / 44.5W	86.7W / 110.1W
LUMENS RÉELS INDIRECT (4000K)	3864LM / 4682LM	9856LM / 12161LM
EFFICACITÉ	108LM/W	114LM/W


AUTRES INFORMATION

AUTRES INFORMATION	4715-24	4715-36
POIDS	12.5LBS / 5.7KG	33.5LBS / 15.2KG

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE



4715-XX



Visitez notre site Web pour les termes et conditions.