
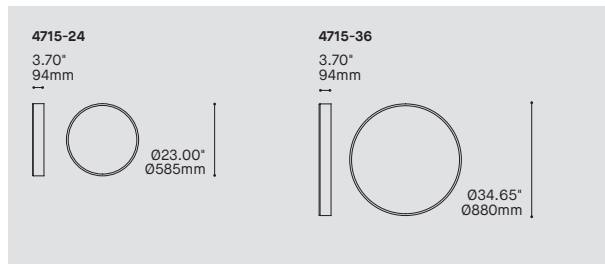
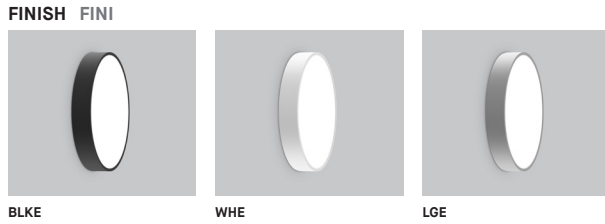


AREA 4715

PROJECT PROJÉT
SPEC TYPE
NOTES

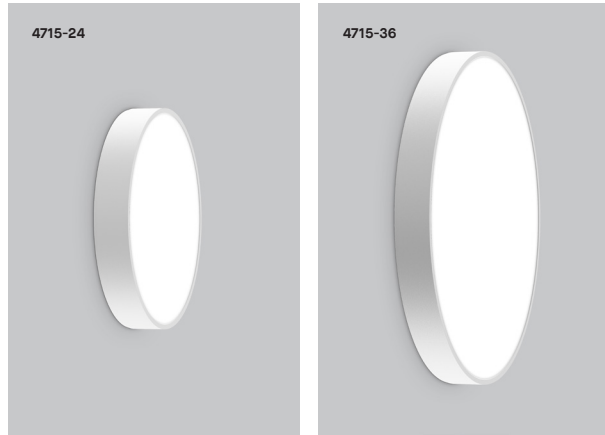

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4715-24	AREA 24"	
4715-36	AREA 36"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR (A)		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NA*	NLIGHT AIR CONTROL	
NW	NLIGHT WIRED CONTROL	
LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE		
* REQUIRES REMOTE BOX (3985)		
EMERGENCY BATTERY BATTERIE D'URGENCE		
EM	EMERGENCY BATTERY	
HOUSING FINISH FINI BOITIER		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
LGE	LIGHT GRAY FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		
WH	WHITE	WH
ACCESSORY ACCESSOIRE		
3985	REMOTE BOX FOR NLIGHT CONTROL	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Large format, functional and elegant round surface mounted fixtures in Ø24" and Ø36".

LIGHT SOURCE: High performance LED modules with standard 0-10v or phase dimming driver integrated within the fixture.

STRUCTURE: Aluminum extrusion frame and die-formed steel backplate with polyester powder finish.

DIFFUSER: High performance white translucent PMMA.

CERTIFIED: c-CSA-us

CONCEPTION: Luminaire rond, élégant et fonctionnel disponible en grands formats de Ø24" et Ø36" avec éclairage direct. Version surface.


SOURCE LUMINEUSE: Modules de DEL hautes performances avec un convertisseur à gradation 0-10v ou phase intégré dans le luminaire.

STRUCTURE: Cadre d'aluminium extrudé et plaque d'acier découpé puis plié, avec peinture électrostatique à base de polyester.

DIFFUSEUR: PMMA translucide blanc haute performance.

CERTIFIÉ: c-CSA-us


AREA 4715

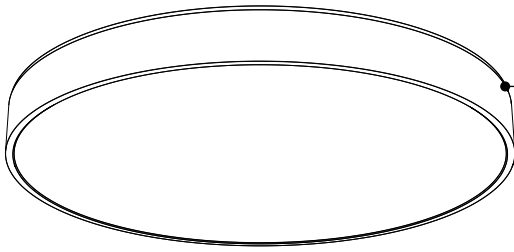


SIMPLE AND CLEAN HOUSING
Precision welded aluminium extrusion
Clean geometry on the outside,
structural details on the inside

SHADOW LINE
Built-in shadow line for a clean install,
compensates for uneven ceiling surfaces


LENS
High performance frosted acrylic lens
for superior light transmission

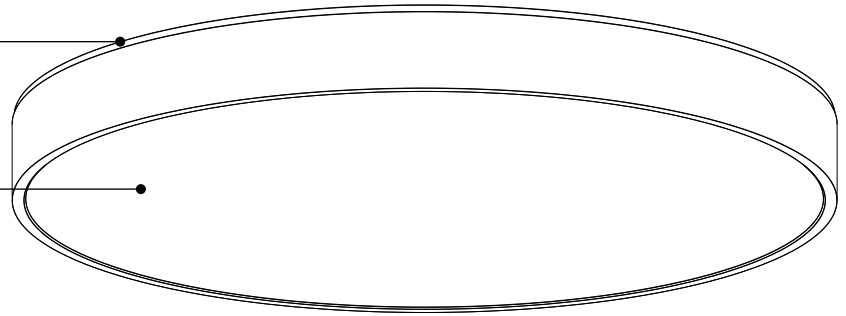

4715-36



4715-24



4715-36



Also available in acoustic version
See product 4716

PRODUCT SPECIFICATION

4715-24

4715-36

PERFORMANCE

SYSTEM WATTAGE	35.8W / 44.5W	86.7W / 110.1W
DELIVERED DIRECT LUMENS (4000K)	3864LM / 4682LM	9856LM / 12161LM
EFFICACY	108LM/W	114LM/W


OTHER INFORMATION

WEIGHT	12.5LBS / 5.7KG	33.5LBS / 15.2KG
--------	-----------------	------------------

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION




4715-XX



Visit our website for warranty terms and conditions.



TECHNICAL DATA

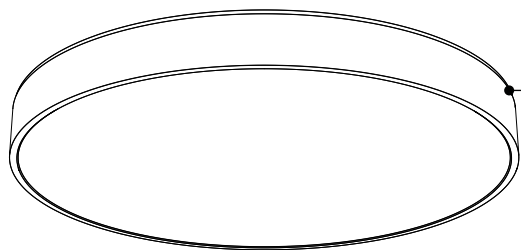


BOÎTIER SOBRE


Extrusion d'aluminium soudée avec précision
Lignes nettes et modernes à l'extérieur,
détails structuraux cachés à l'intérieur

JOINT CREUX
Léger retour intégré au boîtier pour une
installation propre, compense pour les
surfaces de plafond irrégulières


LENTILLE
Lentille d'acrylique givrée haute performance
permet une transmission optique supérieure

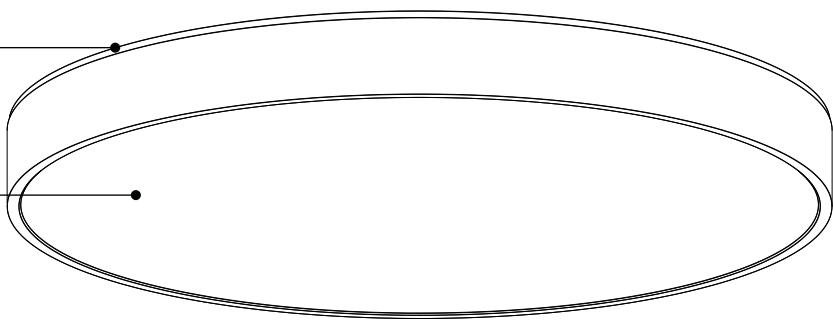

4715-36



4715-24



4715-36



Aussi disponible en version acoustique
Voir le produit 4716

SPÉCIFICATION PRODUIT

4715-24

4715-36

PERFORMANCE

PUISSANCE TOTALE	35.8W / 44.5W	86.7W / 110.1W
LUMENS RÉELS INDIRECT (4000K)	3864LM / 4682LM	9856LM / 12161LM
EFFICACITÉ	108LM/W	114LM/W


AUTRES INFORMATION

POIDS	12.5LBS / 5.7KG	33.5LBS / 15.2KG
-------	-----------------	------------------

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE



4715-XX



Visitez notre site Web pour les termes et conditions.