


ARENA SQUARE & RECTANGLE 8220

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE

WHE

FAMILY FAMILLE




ARENA - BEAM 8290

ARENA - GLOW 8291

ARENA - AIM 8292

ARENA - BALL 8295

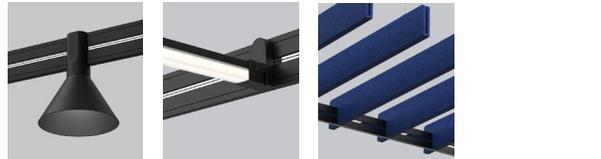


ARENA - CONE 8294

ARENA - SLICE SQ 8296

ARENA - ACOUSTIC 8298

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

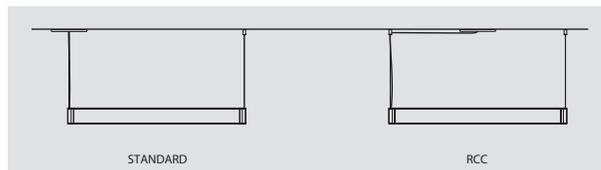

STANDARD

RCC

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

STANDARD MODEL MODÈLE STANDARD

8220-36X36	ARENA SQUARE 36X36"	8220-36X190	ARENA RECTANGLE 36X190"
8220-54X54	ARENA SQUARE 54X54"	8220-54X190	ARENA RECTANGLE 54X190"
8220-96X96	ARENA SQUARE 96X96"	8220-96X190	ARENA RECTANGLE 96X190"
8220-190X190	ARENA SQUARE 190X190"	8220-36X380	ARENA RECTANGLE 36X380"
8220-380X380	ARENA SQUARE 380X380"	8220-54X380	ARENA RECTANGLE 54X380"
8220-36X54	ARENA RECTANGLE 36X54"	8220-96X380	ARENA RECTANGLE 96X380"
8220-36X96	ARENA RECTANGLE 36X96"	8220-190X380	ARENA RECTANGLE 190X380"
8220-54X96	ARENA RECTANGLE 54X96"		

FOR CUSTOM SIZES, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

DC LOAD PUISSANCE MAXIMALE DC

90W	1 CANOPY / 1 DRIVER OF 90W
180W	1 CANOPY / 2 DRIVERS OF 90W
360W	2 CANOPY / 4 DRIVERS OF 90W
540W	4 CANOPY / 6 DRIVERS OF 90W
720W	4 CANOPY / 8 DRIVERS OF 90W

8220	36"	54"	96"	190"	380"
36"	90W				
54"		180W			
96"			180W	360W	540W
190"					
380"					720W

ARENA
SQUARE 8220
MAXIMUM DC LOAD SEE TABLE
MAXIMUM TOTAL WEIGHT PER SECTION 25 LBS

LIGHT SOURCES							
BEAM 8290	GLOW 8291	AIM 8292	SLICE-SQ 8296-36	SLICE-SQ 8296-54	BALL 8295	CONE 8294	ADAPTER TAA
8W DC	8W DC	8W DC	8W DC	11W DC	8W DC	11W DC	SEE SPEC SHEET
0.62 LBS	0.70 LBS	0.61 LBS	2.22 LBS	3.50 LBS	0.48 LBS	0.88 LBS	

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTIONS OPTION DE CONTRÔLE

DV	0-10V DIMMING (120V-277V)
NLTAIR2*	NLIGHT AIR CONTROL GEN2 (NOT AVAILABLE WITH MOUNTING OPTION RC3)
NLIGHT*	NLIGHT WIRED CONTROL (NOT AVAILABLE WITH MOUNTING OPTION RC3)
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT
	*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

CABLE CÂBLE

AC	AIRCRAFT CABLE & POWER CORD, FIELD ADJUSTABLE
----	---

AC

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC2	ROUND SURFACE SCREWLESS CANOPY 9.4" FOR 90W ONLY (24751)
RC3	ROUND SURFACE SCREWLESS CANOPY 4.6" FOR REMOTE DRIVER BOX 12"X16" (2471C) (PAIR WITH ACCESSORY 3981GA OR 3981GB)
RC4	ROUND SURFACE SCREWLESS CANOPY 12" FOR 180W OR 360W (24771)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RCC	FLOATING CANOPY - STRAIGHT AIRCRAFT CABLES
	IF NO OPTION IS SELECTED, A CANOPY AT CORNERS OF THE FIXTURE WITH AIRCRAFT CABLES IS STANDARD

CANOPY & GRIPPERS FINISH FINI PAVILLON ET ATTACHES

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE


POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK	BLACK POWER CORD
WH	WHITE POWER CORD
CLR	CLEAR POWER CORD

FRAME FINISH FINI DU CADRE

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

MOUNTING OPTION OPTION DE MONTAGE

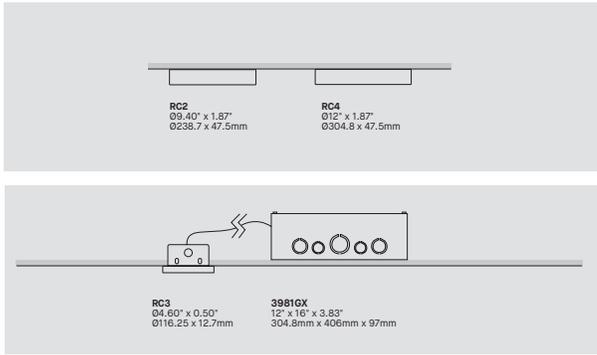

ACCESSORY ACCESSOIRE


- 3981GA** 1 REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
- 3981GB** 1 REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 180W
- 3981GB2** 2 REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 360W
- 3981GB3** 3 REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 540W
- 3981GB4** 4 REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 720W
- 39NLAA*** NLIGHT AIR GEN 2 REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)
- 39NLWA*** NLIGHT WIRED REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE


ARENA SQUARE 8220

CONFIGURATIONS


8220-36X36
ARENA SQUARE 36" x 36"

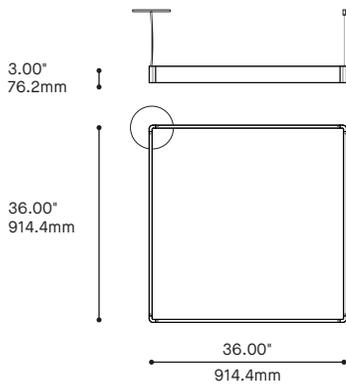


8220-54X54
ARENA SQUARE 54" x 54"

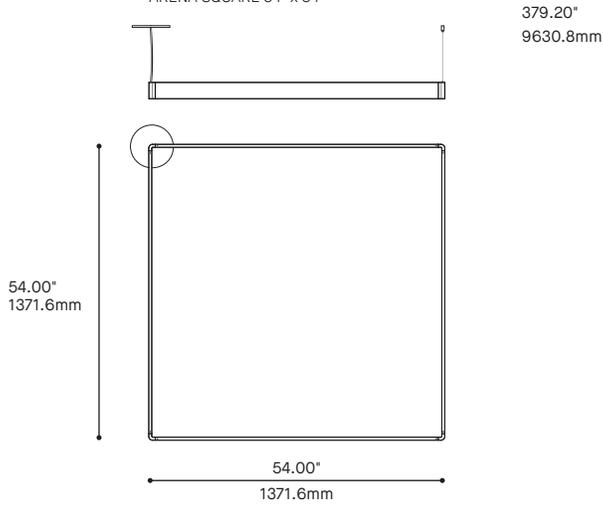


8220-96X96
ARENA SQUARE 96" x 96"

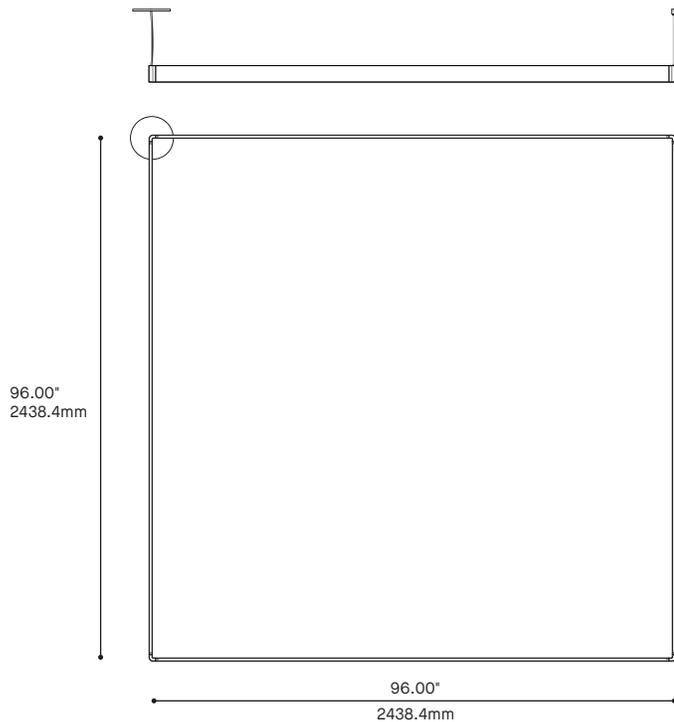

8220-380X380
ARENA SQUARE 380" x 380"






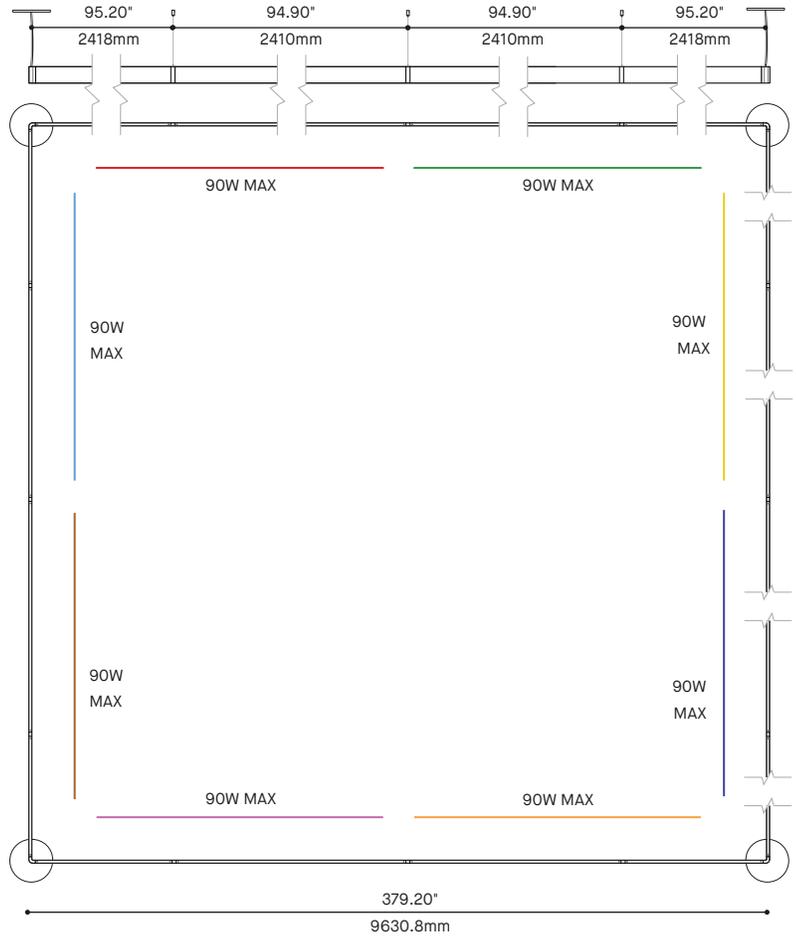


8220-190X190
ARENA SQUARE 190" x 190"

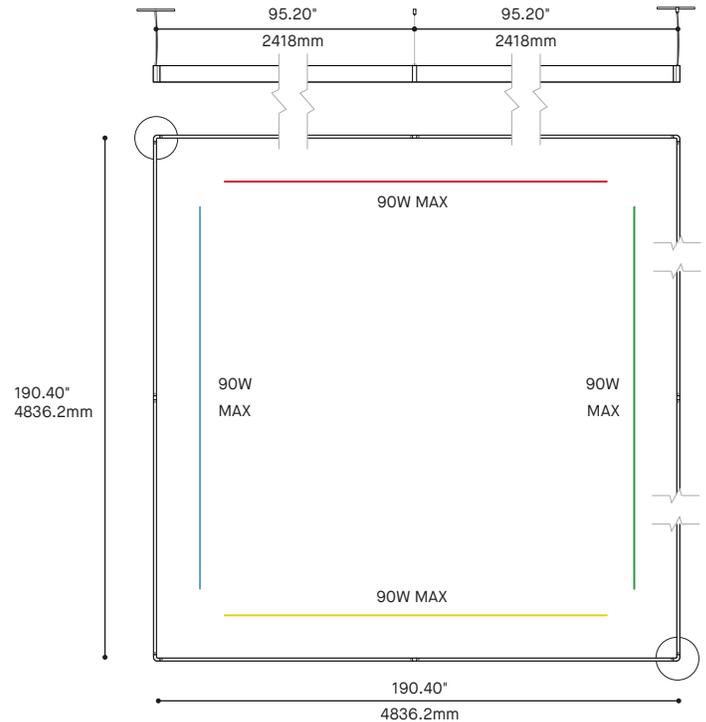

ARENA RECTANGLE 8220 1/2


CONFIGURATIONS

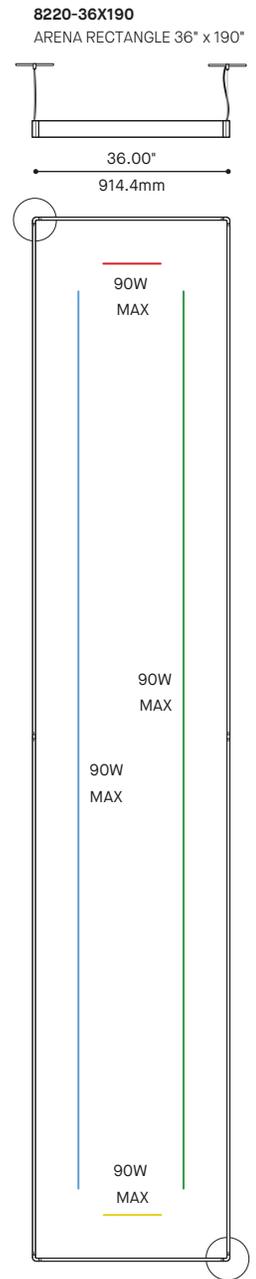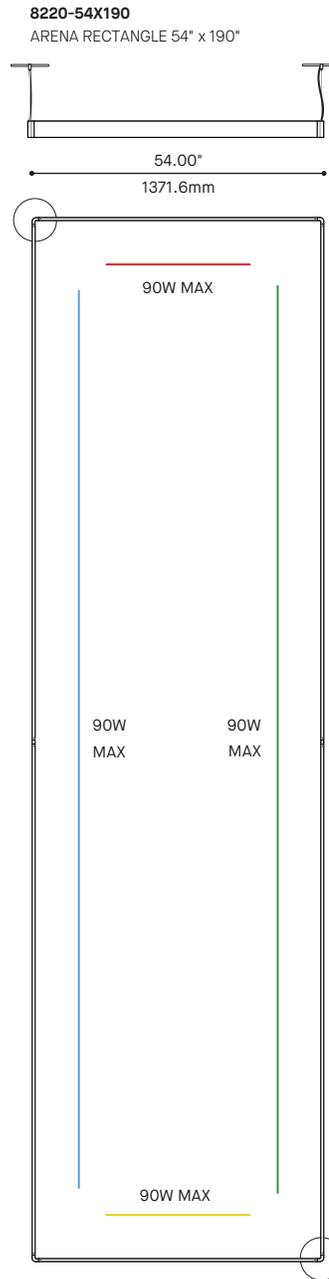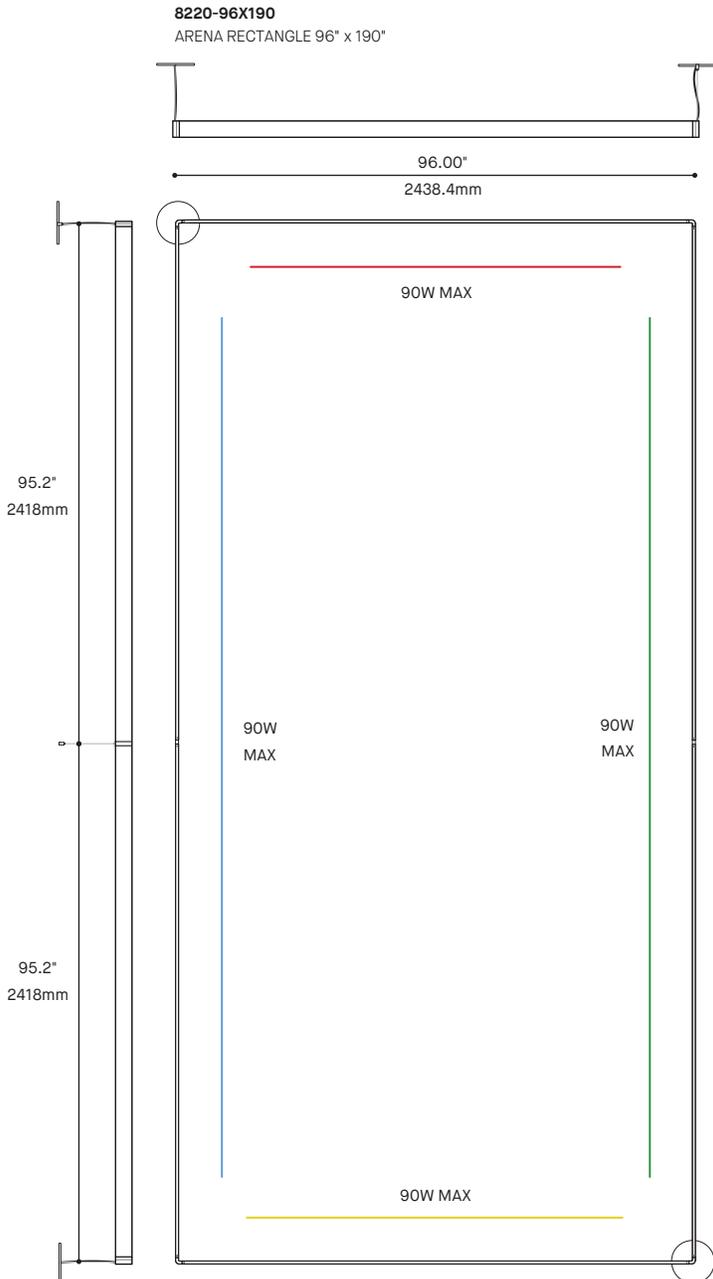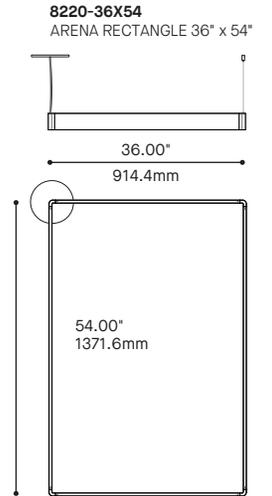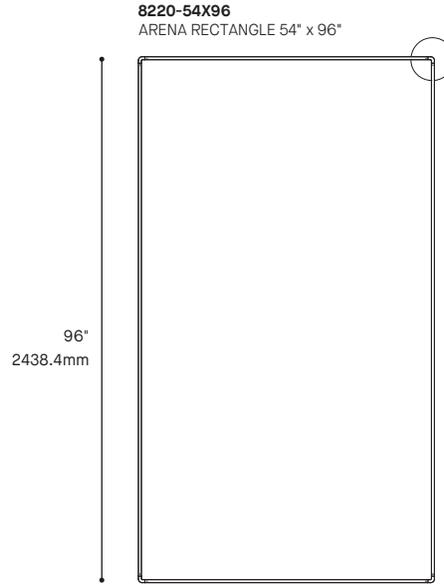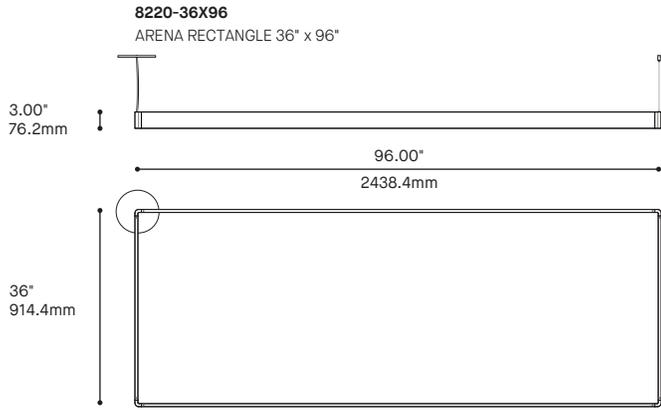


ARENA RECTANGLE 8220 2/2

CONFIGURATIONS


8220-96X380
ARENA SQUARE 96" x 380"

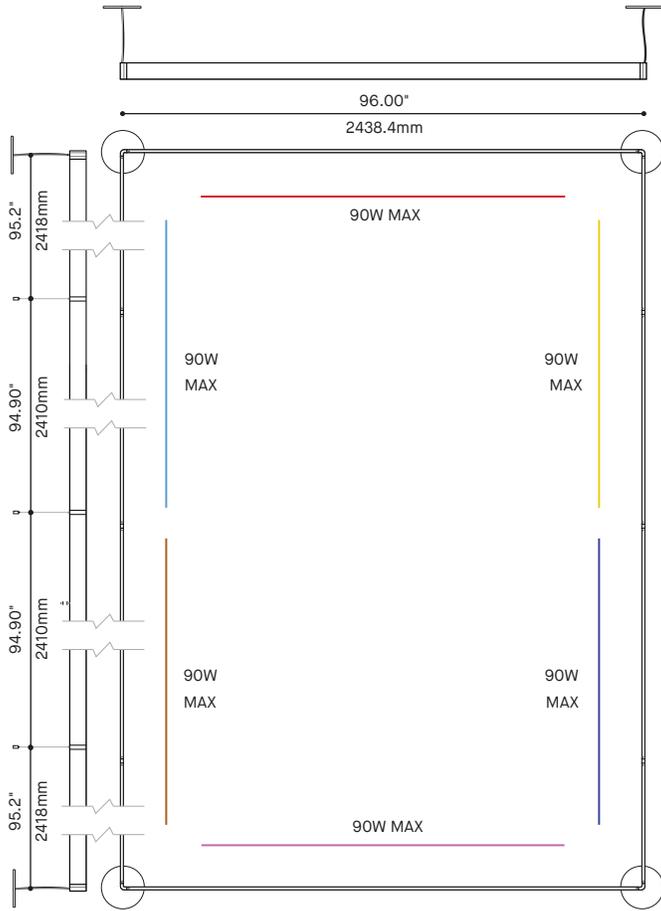


8220-54X380
ARENA RECTANGLE 54" x 380"

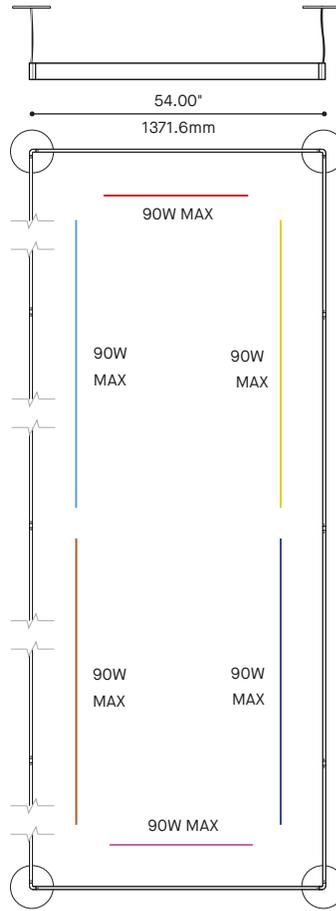


8220-36X380
ARENA RECTANGLE 36" x 380"

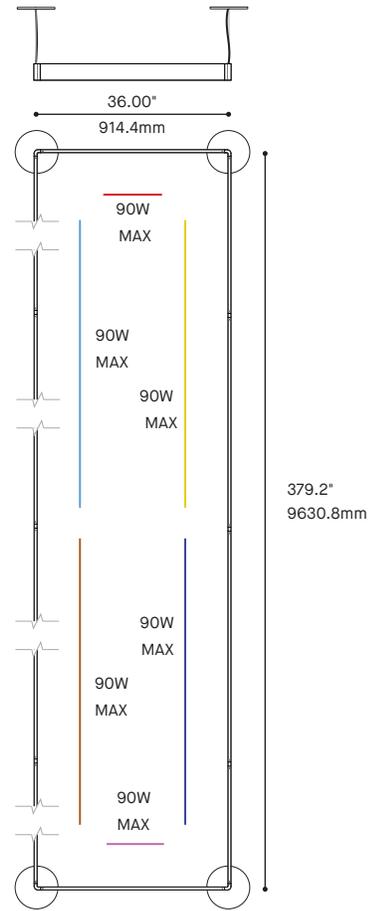

8220-190X380
ARENA RECTANGLE 190" x 380"

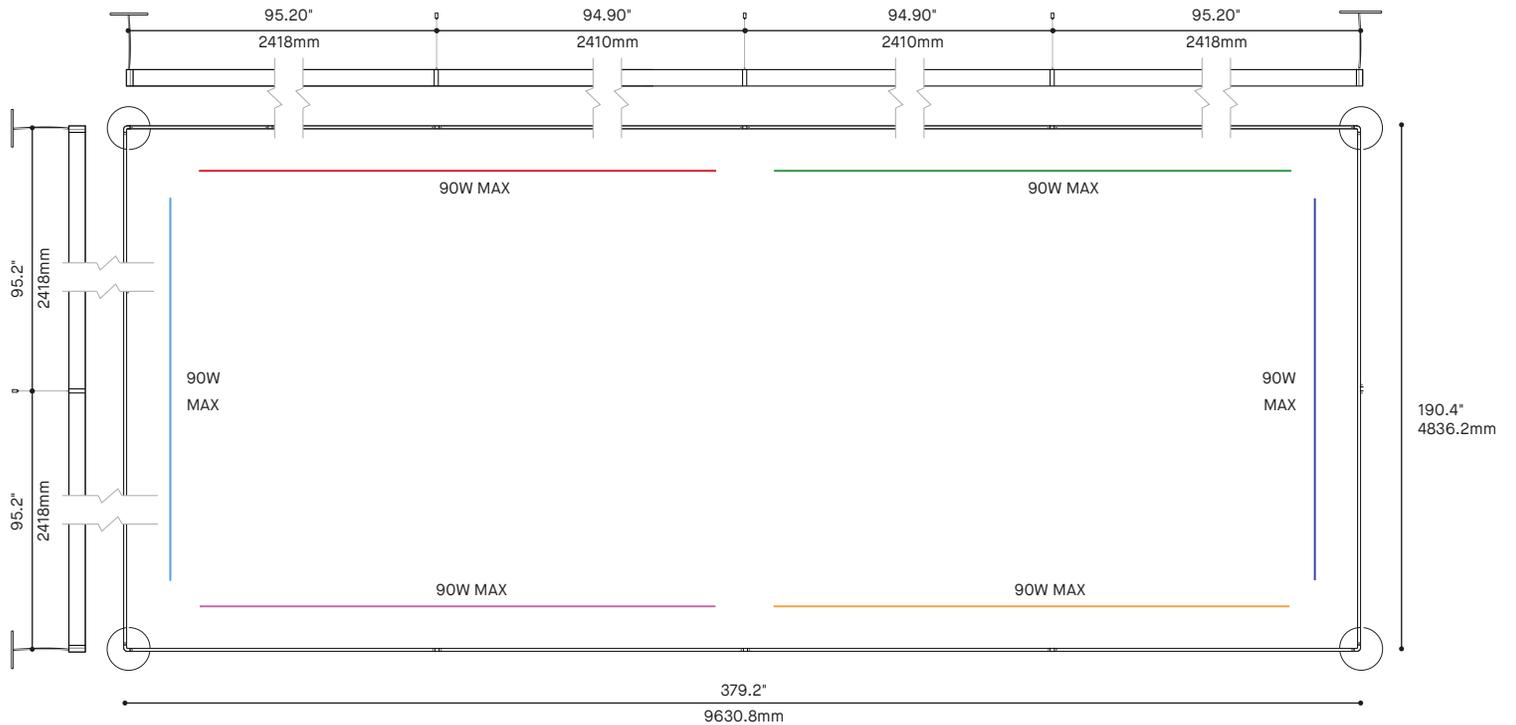


ARENA RECTANGLE 8220

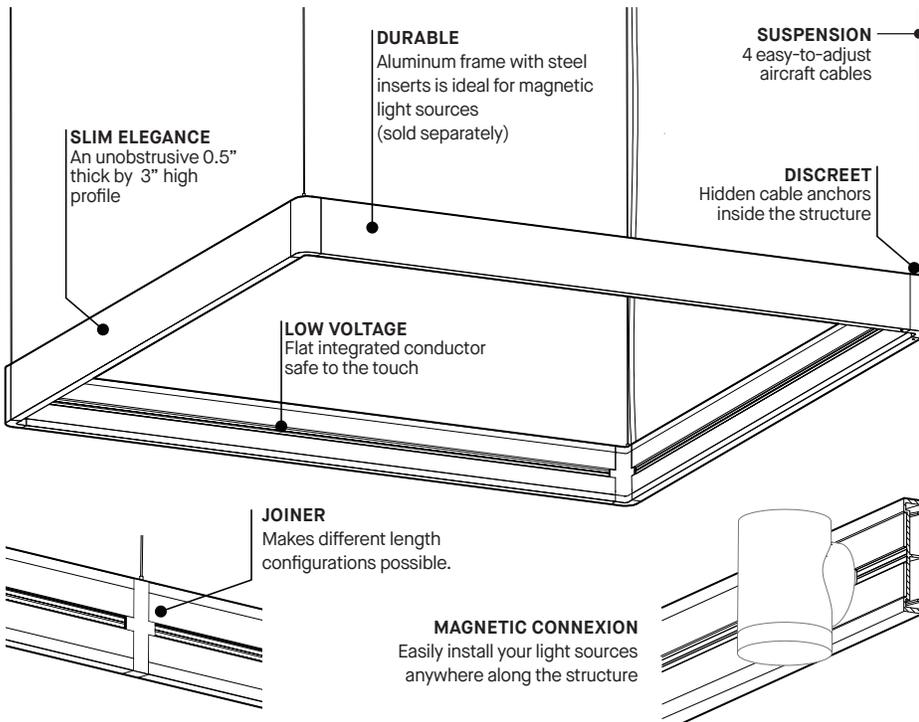


LIGHT SOURCES

Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined. Please refer to their individual product pages for more information.

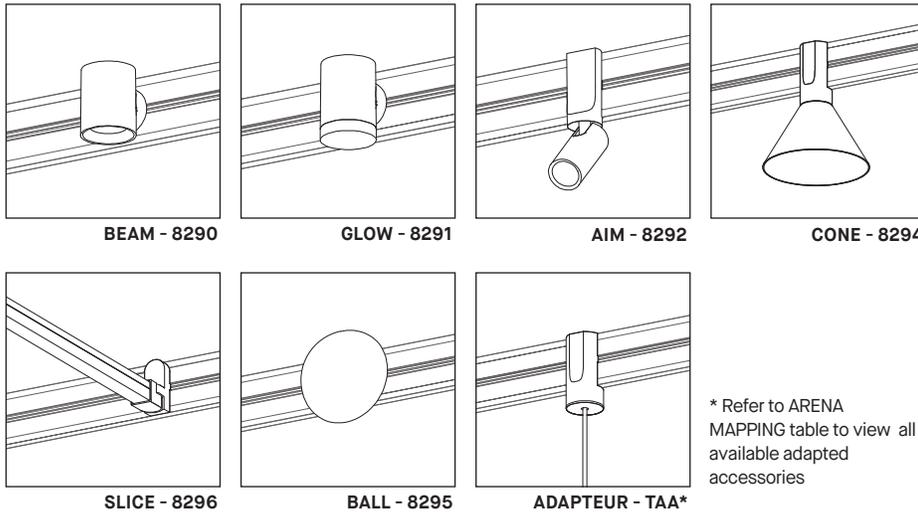


* Refer to ARENA MAPPING table to view all available adapted accessories


ARENA SQUARE

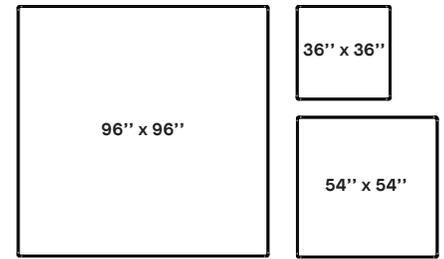

ARENA SQUARE WITH JOINERS

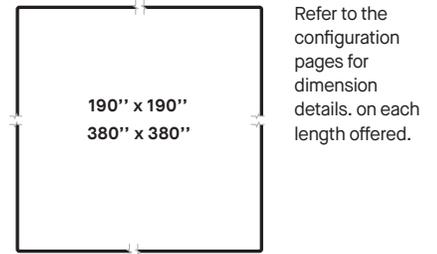

CANOPY POSITION

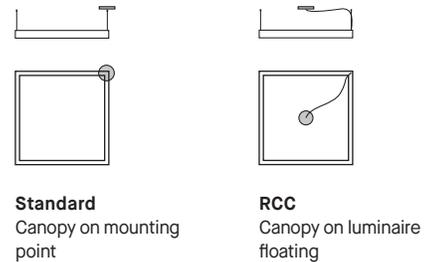

CANOPY TYPE

RC2	RC3	RC4
09.40" x 1.87"	04.60" x 0.50"	012" x 1.87"
0238.7 x 47.5mm	0116.25 x 12.7mm	0304.8 x 47.5mm

PRODUCT SPECIFICATIONS

	36X36	54X54	96X96	190X190	380X380
ACCESSORIES QUANTITY					
MAX TOTAL DC LOAD OF ACCESSORIES	90W / 180W			360W	720W
MAX TOTAL WEIGHT OF ACCESSORIES	100 LBS / 22.6 KG			200 LBS / 45,2 KG	400 LBS / 90.4 KG
* Refer to mapping page for weight per configuration.					
OTHER INFORMATION					
PRODUCT WEIGHT (WITHOUT ACCESSORIES)	12.72 LBS / 5.77 KG	19.05 LBS / 8.64 KG	33.86 LBS / 15.86 KG	69.93 LBS / 31.72 KG	139.45 LBS / 63.25 KG




Visit our website for warranty terms and conditions.




TECHNICAL DATA

ARENA RECTANGLE 8220

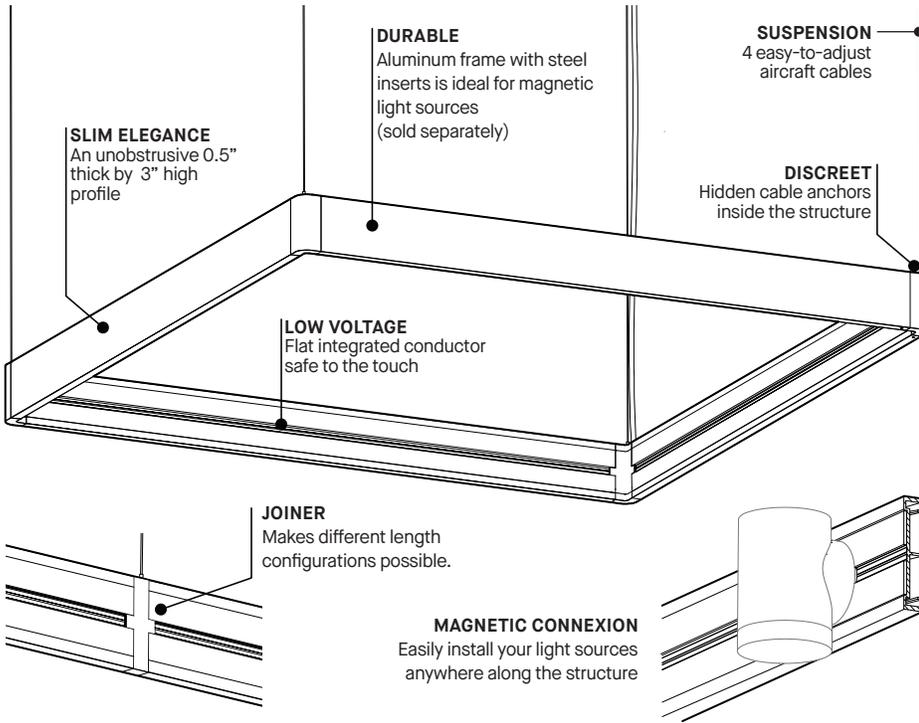

ARENA RECTANGLE

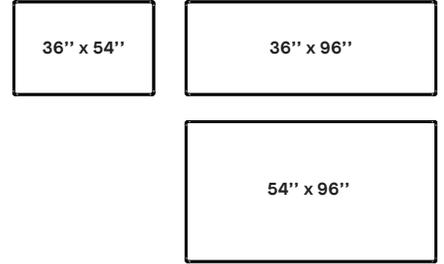

ARENA RECTANGLE WITH JOINERS




36" x 190"
54" x 190"
96" x 190"

Refer to the configuration pages for dimension details, on each length offered.

36" x 380"
54" x 380"
96" x 380"
190" x 380"


LIGHT SOURCES

Several light source accessories are available for ARENA. They are sold separately in the quantity and type desired. Different types can be combined. Please refer to their individual product pages for more information.

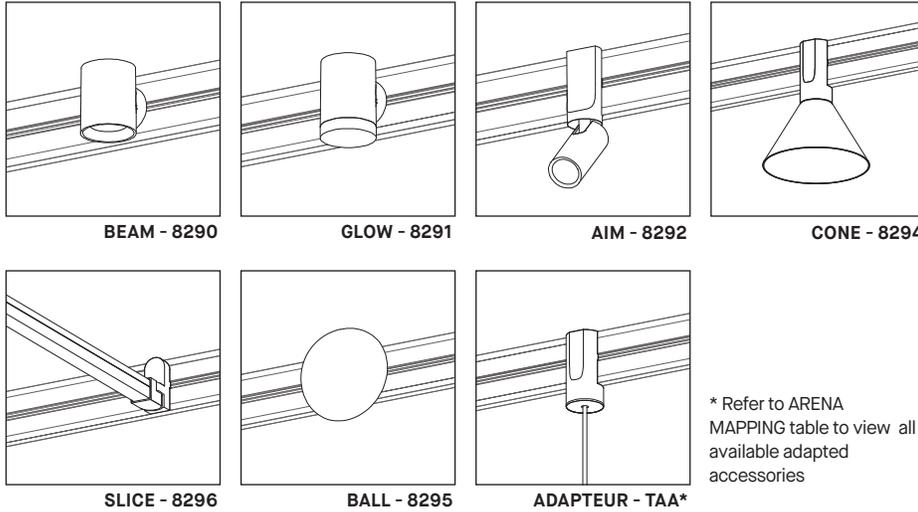

* Refer to ARENA MAPPING table to view all available adapted accessories


CANOPY POSITION

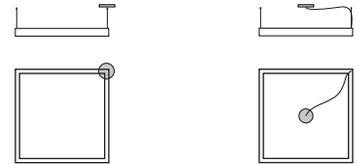

Standard
Canopy on mounting point

RCC
Canopy on luminaire floating

CANOPY TYPE



PRODUCT SPECIFICATIONS	36X54	36X96	54X96	36X190	54X190	96X190	36X380	54X380	96X380	190X380
ACCESSORIES QUANTITY										
MAX TOTAL DC LOAD OF ACCESSORIES	90W / 180W			360W			540W			540W
MAX TOTAL WEIGHT OF ACCESSORIES	100 LBS / 22.6 KG			200 LBS / 45.2 KG			250 LBS / 113.4 KG			300 LBS / 136 KG
* Refer to mapping page for weight per configuration.										
OTHER INFORMATION										
PRODUCT WEIGHT (WITHOUT ACCESSORIES)	15.87 LBS / 7.20 KG	23.28 LBS / 10.56 KG	26.46 LBS / 12.0 KG	41.71 LBS / 18.92 KG	44.88 LBS / 20.36 KG	52.55 LBS / 23.84 KG	76.47 LBS / 34.68 KG	79.64 LBS / 36.12 KG	87.31 LBS / 39.60 KG	139.45 LBS / 47.69 KG



Visit our website for warranty terms and conditions.




TECHNICAL DATA

Arena Mapping

MIXING LIGHT SOURCES IS POSSIBLE AND RECOMMENDED. TO HELP YOU DO SO, SUBSTRACT THE DC LOAD OF EACH LIGHT SOURCE FROM THE MAXIMUM DC LOAD OF ARENA. DO NOT EXCEED MAXIMUM WEIGHT PER SIDE



LUMINAIRE	FRAME CONFIGURATION *REFER TO 2D DRAWINGS FOR EACH SIZE.	ARENA RING 8200-36 8200-54	ARENA SQUARE & RECTANGLE			
			8220-36X36 8220-36X54	8220-54X54 8220-36X96 8220-54X96 8220-96X96	8220-36X190 8220-54X190 8220-96X190 8220-190X190	8220-36X380 8220-54X380 8220-96X380 8220-190X380 8220-380X380
	MAXIMUM TOTAL DC LOAD OF ACCESSORY	90W DC	90W DC	180W (90W DC PER 2 SIDES)	360W (90W DC PER SIDES)	540W, 720W (90W DC PER SECTION)
	MAXIMUM TOTAL WEIGHT OF ACCESSORY	25 LBS	25 LBS / SIDE	25 LBS / SIDE	25 LBS / SECTION	25 LBS / SECTION

LUMINAIRE	FRAME CONFIGURATION *REFER TO 2D DRAWINGS FOR EACH SIZE.	ARENA STRAIGHT			
		8210-36 (1 SECTION) 8210-54 (1 SECTION) 8210-70 (2 SECTIONS)	8210-96 (1 SECTION) 8210-158 (3 SECTIONS) 8210-190 (2 SECTIONS)	8210-284 (3 SECTIONS) 8210-380 (4 SECTIONS)	
		MAXIMUM TOTAL DC LOAD OF ACCESSORY	90W (90W DC FOR BOTH SIDES)	180W (90W DC PER SECTION)	360W DC (90W DC PER SECTION)
	MAXIMUM TOTAL WEIGHT OF ACCESSORY	25 LBS / SECTION	25 LBS / SECTION	25 LBS / SECTION	

ACCESSORIES HEAD	LIGHT SOURCES	BEAM 8290	GLOW 8291	AIM 8292	CONE 8294	BALL 8295
						
	DC LOAD	8W DC	8W DC	8W DC	11W DC	8W DC
	WEIGHT LBS	0.62 LBS	0.70 LBS	0.61 LBS	0.88 LBS	0.48 LBS

ACCESSORIES SLICE	LIGHT SOURCES	SLICE-ROUND 8293 (ONLY FOR 8200)		SLICE-SQUARE 8296	
		8293-36	8293-54	8296-36	8296-54
					
	DC LOAD	8W DC	11W DC	8W DC	11W DC
WEIGHT LBS	1.24 LBS	1.65 LBS	2.22 LBS	3.50 LBS	

ACCESSORIES ADAPTER	LIGHT SOURCES	MILL 14" 4277D-14	SCOUT 02.75" 4048-XX	SCOUT 04" 4049-XX	MIKA 8" 4230-8	BLOOM 4269-XX	MINI MUTE 4258-16	CELESTE 4010-CEL1
								
	DC LOAD	8W DC	8W DC	8W DC	8W DC	8W DC	11W DC	4W DC
	WEIGHT LBS	11.3 LBS	MAX 4.32 LBS	MAX 6.05 LBS	2.40 LBS	MAX 9.75 LBS	5.83 LBS	2.20 LBS

ACCESSORIES ACOUSTIC	ACOUSTIC CONFIGURATION	ACOUSTIC BAFFLE FOR ARENA SQUARE		ACOUSTIC BAFFLE FOR ARENA STRAIGHT	
		8297-40	8297-58	8298-40	8298-58
					
	WEIGHT LBS	1.38 LBS / PANEL	1.63 LBS / PANEL	1.38 LBS / PANEL	1.63 LBS / PANEL
CONFIGURATION USE FOR ARENA	8220-36X36 8220-36X54 8220-36X96	8220-54X54 8220-36X54 8220-54X96	8210-XX 8220-XX	8210-XX 8220-XX	

*WE RESERVE THE RIGHT TO MODIFY ANY INFORMATION AT ANY TIME.

ARENA – BEAM 8290

PROJECT PROJET
SPEC TYPE
NOTES



FAMILY FAMILLE



FINISH FINI



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE	8290
8290*	ARENA – BEAM *ARENA – BEAM IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)
LIGHT SOURCE SOURCE LUMINEUSE	LED
LED	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	
27	2700K
30	3000K
35	3500K
40	4000K
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)	
80	80+CRI
BEAM ANGLE ANGLE DE FAISCEAU	
NA	NARROW (16°)
ME	MEDIUM (26°)
WI	WIDE (45°)
PROJECTOR FINISH FINI PROJECTEUR	
BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES	
CLR	CLEAR GLASS LENS
FRO	FROSTED LENS
HON	HONEYCOMB LOUVER
SOL	SOLITE SOFTENING LENS

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	ARENA – BEAM is a classic yet modern 62mm diameter spot accessory for ARENA (8200). The accessory rotates 90° in each direction and the light source can be flipped on the ring for direct or indirect illumination. ARENA – BEAM hides discreetly behind the ring's height and shines brightly above or below.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – BEAM can be installed on each ARENA or can be combined with other accessories for a total load of up to 90W.
LIGHT SOURCE:	COB LED with light collimating reflector offered in three beam angles: 16°, 26° or 45°. Optical accessories such as clear and frosted lens, a Solite softening lens and honeycomb louvers can be added to each projector to precisely control the emitted light.
PROJECTOR:	Custom designed diecast aluminum heatsink offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	ARENA – BEAM est un projecteur de 62mm au look moderne pour ARENA (8200). L'accessoire pivote 90° dans chaque direction et peut être inversé sur l'anneau pour un éclairage vers le haut ou vers le bas. ARENA – BEAM se dissimule discrètement derrière la hauteur de l'anneau tout en procurant une lumière directe ou indirecte.
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Un maximum de 12 ARENA – BEAM peuvent être installés sur chaque ARENA ou être combinés avec d'autres accessoires jusqu'à une charge maximale de 90W.
SOURCE LUMINEUSE:	LED de type COB avec réflecteur collimateur de lumière offert en trois angles de faisceau: 16°, 26° ou 45°. Accessoires optiques tels que des lentilles transparentes, dépolies, en nid d'abeille ou Solite peuvent être ajoutées sur chaque projecteur afin de contrôler plus précisément la lumière émise.
PROJECTEUR:	Dissipateur thermique en aluminium moulé conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
CERTIFIÉ:	c-CSA-us

REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
ARENA 8200-36 & 8200-54					
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC

ARENA – GLOW 8291

PROJECT PROJÉT
SPEC TYPE
NOTES



FAMILY FAMILLE



ARENA 8200



ARENA – BEAM 8290

FINISH FINI



BLKE



ARENA – AIM 8292



ARENA – SLICE 8293



WHE



ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		8291
8291*	ARENA – GLOW * ARENA – GLOW IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)		
80	80+CRI	
PROJECTOR FINISH FINI PROJECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES		FRO
FRO	FROSTED LENS	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** With its thick clear-cut crystalline diffuser, ARENA – GLOW adds a touch of ambient luxury to the stately ARENA (8200) ring profile. Using the same 62mm body of ARENA – BEAM, the accessory rotates 90° in each direction and can be flipped vertically on the ring to enable direct or indirect illumination.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – GLOW can be installed on each ARENA or can be combined with other accessories for a total load of up to 90W.
- LIGHT SOURCE:** COB LED combined with machined acrylic diffuser. The diffuser has a frosted interior surface for a smooth light diffusion and a perfectly polished exterior giving it a jewel-like look. Custom designed diecast aluminum heatsink offered in white or black architectural grade finish. c-CSA-us
- CONCEPTION:** Avec son diffuseur massif et cristallin, ARENA – GLOW ajoute une touche luxueuse à l'anneau ARENA (8200). En utilisant le même corps de 62 mm de ARENA – BEAM, l'accessoire pivote sur 90° dans chaque direction et peut être inversé sur l'anneau pour une illumination directe ou indirecte.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Un maximum de 12 ARENA – GLOW peuvent être installés sur chaque ARENA ou être combinés avec d'autres accessoires jusqu'à une charge maximale de 90W.
- SOURCE LUMINEUSE:** LED de type COB combiné à un diffuseur en acrylique usiné. Le diffuseur a une surface intérieure givrée pour une diffusion douce de la lumière et un extérieur parfaitement poli lui attribuant un aspect luxueux.
- PROJECTEUR:** Dissipateur thermique en aluminium moulé conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
ARENA 8200-36 & 8200-54	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC

ARENA – AIM 8292

PROJECT PROJÉT
SPEC TYPE
NOTES

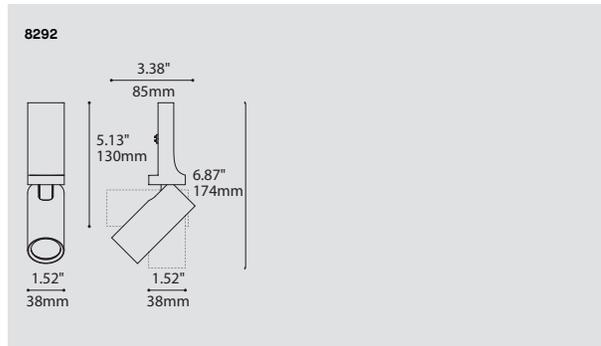

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		8292
8292*	ARENA – AIM * ARENA – AIM IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES (8290, 8291, 8292, 8293-36, 8293-54) MUST NOT EXCEED 90W.	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40	4000K	
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)		
80	80+CRI	
BEAM ANGLE ANGLE DE FAISCEAU		
NA	NARROW (19°)	
WI	WIDE (30°)	
PROJECTOR FINISH FINI PROJECTEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:	ARENA – AIM is an elegant 38mm diameter aimable projector for ARENA (8200). The head rotates at 350° and can be tilted up to 90° inwards or outward for a wider lighting surface area. ARENA – AIM can also be flipped vertically on the ring to enable direct or indirect illumination.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. A maximum of up to 12 ARENA – AIM projectors can be installed on each ARENA or can be combined with other accessories for a total of up to 90W.
LIGHT SOURCE:	COB LED with a 32mm silicone collimator available in 19° & 30° beam angles.
PROJECTOR:	Custom designed diecast aluminum heatsink offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	ARENA – AIM est un projecteur dirigeable élégant de 38mm pour ARENA (8200). La tête pivote à 350° et incline à 90° vers l'intérieur ou l'extérieur pour une surface d'éclairage élargie. ARENA – AIM peut être inversé verticalement pour une illumination directe ou indirecte.
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration sur place. Un maximum de 12 projecteurs ARENA – AIM peuvent être installés sur chaque ARENA ou peuvent être combinés avec d'autres accessoires pour une puissance totale jusqu'à 90W.
SOURCE LUMINEUSE:	LED de type COB avec un collimateur en silicone de 32 mm offert en deux angles de faisceau: 19° ou 30°.
PROJECTEUR:	Dissipateur thermique en aluminium moulé conçu sur mesure, offert avec une finition noire ou blanche finement texturée de grade architectural.
CERTIFIÉ:	c-CSA-us

REFERENCE CHART TABLEAU DE RÉFÉRENCE

RING	LIGHT SOURCES				
	BEAM 8290	GLOW 8291	AIM 8292	SLICE RD 8293-36	SLICE RD 8293-54
ARENA 8200-36 & 8200-54					
MAXIMUM DC LOAD 90W	8W DC	8W DC	8W DC	8W DC	11W DC

ARENA – CONE 8294

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI



BLKE

WHE

FAMILY FAMILLE



ARENA - BEAM 8290

ARENA - GLOW 8291

ARENA - AIM 8292


ARENA - BALL 8295



ARENA - CONE 8294

ARENA - SLICE SQ 8296

ARENA - ACOUSTIC 8298

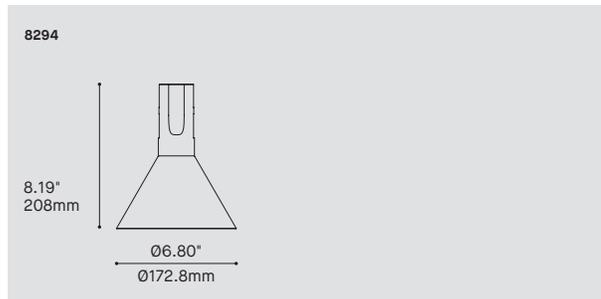

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		8294
8294*	ARENA – CONE * ARENA – CONE IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200, 8210 OR 8220 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		LED
LED	REGULAR OUTPUT, 11W	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		80
80	80 CRI	
BEAM ANGLE ANGLE DE FAISCEAU		WI
WI	WIDE (30°)	
FINISH FINI		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** CONE is a sleek projector with a simple and geometric look. Placed separately or clustered, this accessory allows adding specific points of light to create a unique presence and visual statement.
- INSTALLATION:** Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. Can be flipped vertically on the frame to enable direct or indirect illumination.
- LIGHT SOURCE:** COB LED with a 30° beam angle.
- PROJECTOR:** Custom designed aluminum heatsink and spun aluminum shade offered in white or black architectural grade powder coated finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** CONE est un projecteur élégant au style simple et géométrique. Placé séparément ou en groupe, cet accessoire permet d'ajouter des points de lumières spécifiques et de créer une présence unique.
- INSTALLATION:** Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur place. Peut offrir un éclairage direct ou indirect en étant orienté vers le bas ou vers le haut.
- SOURCE LUMINEUSE:** DEL de type COB avec un angle de projection de 30°.
- PROJECTEUR:** Dissipateur thermique et abat-jour en aluminium conçus sur mesure et offerts avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

ARENA – BALL 8295

PROJECT PROJET
SPEC TYPE
NOTES

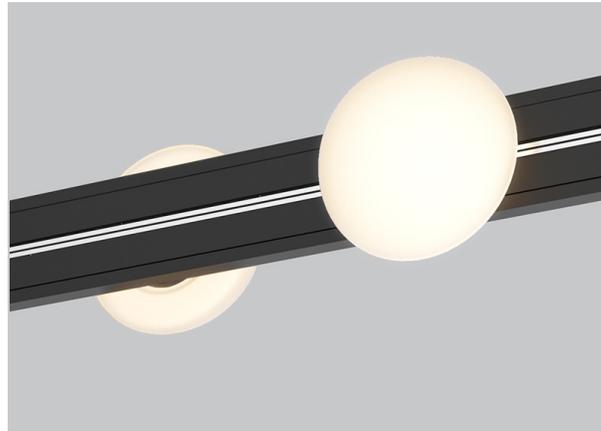

FAMILY FAMILLE

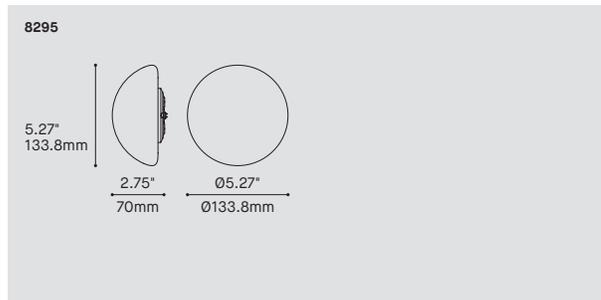

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	8295* ARENA – BALL * ARENA – BALL IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200, 8210 OR 8220 (SOLD SEPARATELY)	8295
LIGHT SOURCE SOURCE LUMINEUSE	LED REGULAR OUTPUT, 8W TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W.	LED
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	27* 2700K 30 3000K 35 3500K 40 4000K *LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)	80 80 CRI	80
HEATSINK FINISH FINI DU MODULE	BLKE BLACK FINE TEXTURE WHE WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH


PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




- DESIGN:** ALL is half a sphere when mounted on one side of the ARENA and can make a full globe effect when installed mirrored to each other on the straight fixture.
- INSTALLATION:** Magnetically positioned instantly anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment.
- LIGHT SOURCE:** COB LED uniformly diffused.
- BASE:** Custom designed machined aluminum heatsink offered in white or black architectural grade powder coated finish.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** BALL est une demi-sphère lorsqu'elle est montée sur un seul côté du Arena et peut former une sphère presque parfaite lorsque plusieurs sont installées symétriquement sur la version droite du luminaire.
- INSTALLATION:** Positionnée magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur place.
- SOURCE LUMINEUSE:** DEL de type COB avec une diffusion uniforme.
- BASE:** Dissipateur thermique usiné en aluminium conçu sur mesure et offert avec une finition noire ou blanche de grade architectural.
- CERTIFIÉ:** c-CSA-us

ARENA – SLICE SQUARE 8296

PROJECT PROJÉT
SPEC TYPE
NOTES

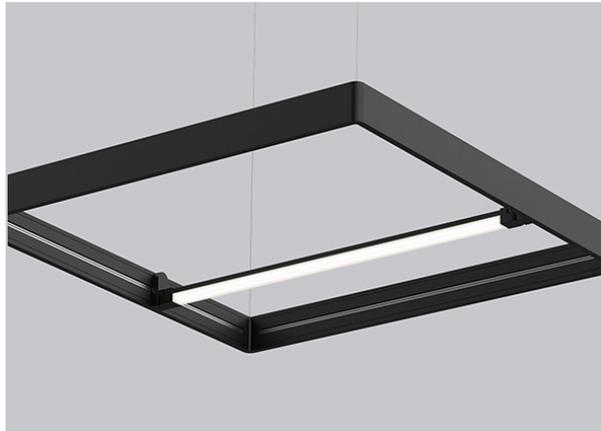

FINISH FINI



BLKE

WHE

FAMILY FAMILLE



ARENA - BEAM 8290

ARENA - GLOW 8291

ARENA - AIM 8292


ARENA - BALL 8295



ARENA - CONE 8294

ARENA - SLICE SQ 8296

ARENA - ACOUSTIC 8298

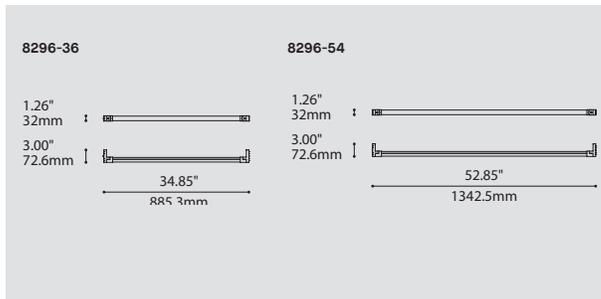

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE

8296-36* ARENA – SLICE SQUARE 36" (ONLY FOR 8220-36X36, 8220-36X96, 8220-36X54)

8296-54* ARENA – SLICE SQUARE 54" (ONLY FOR 8220-54X54, 8220-54X96)

*ARENA – SLICE SQUARE IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8210 OR 8220 (SOLD SEPARATELY)

LIGHT SOURCE SOURCE LUMINEUSE

LED

LED REGULAR OUTPUT, 8W FOR 8296-36 & 11W FOR 8296-54*

TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W.

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+CRI

90* 90+ CRI

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

27* 2700K

30 3000K

35 3500K

40 4000K

*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

FIXTURE FINISH FINI

BLKE BLACK FINE TEXTURE

WHE WHITE FINE TEXTURE

DIFFUSER FINISH FINI DIFFUSEUR

WH

WH WHITE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN:

SLICE SQUARE is an engaging decorative light source with sharp lines. The rectilinear white acrylic diffuser creates a visually striking statement of diffused ambient light. Create a unique environment by arranging several units as desired.

INSTALLATION:

Magnetically positioned instantly anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. This accessory can be flipped to the upper position to overlap another in the lower position for a unique intersecting look.

LIGHT SOURCE:

LED linear light engine with custom engineered acrylic diffuser. Each Slice-Square can be flipped for direct or indirect illumination.

BASE:

Custom designed aluminum extruded heatsink offered in white or black architectural grade finish. Swivels turn up to 45 degrees on both end of the luminaire for more flexibility.

CERTIFIED:

c-CSA-us

CONCEPTION:

SLICE SQUARE est une élégante source de lumière linéaire accrocheuse qui créer un effet d'agencement unique. Extrusion d'aluminium conçue sur mesure avec embouts en aluminium moulé sous pression offerts en finition blanche ou noire de qualité architecturale.

INSTALLATION:

Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. Cet accessoire peut être retourné en position supérieure pour en chevaucher un autre en position inférieure pour un look croisé unique.

SOURCE LUMINEUSE:

Éclairage linéaire à DEL avec diffuseur en acrylique conçu sur mesure. Chaque Slice-square peuvent être installés pour une illumination directe ou indirecte.

BASE:

Dissipateur thermique en aluminium extrudé conçu sur mesure offert en finition blanche ou noire de qualité architecturale. Pivote jusqu'à 45 degrés aux deux extrémités du luminaire pour plus de flexibilité.

CERTIFIÉ:


c-CSA-us

SCOUT 404X FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES



ADAPTER FINISH FINI DE L'ADAPTEUR



BLKE WHE

SHADE & BAFFLE FINISH FINI ABAT-JOUR & DÉFLECTEUR



ORDERING SPECIFICATION	SÉPÉCIFICATION DE COMMANDE	CODE			
MODEL MODÈLE					
4048-6	SCOUT 6" Ø2.75"				
4048-10	SCOUT 10" Ø2.75"				
4048-18	SCOUT 18" Ø2.75"				
4049-6	SCOUT 6" Ø4.5"				
4049-10	SCOUT 10" Ø4.5"				
4049-18	SCOUT 18" Ø4.5"				
LIGHT SOURCE SOURCE LUMINEUSE					
LEDA	SPECIAL OUTPUT FOR ARENA, 8W	LEDA			
* TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION					
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)					
80	80+ CRI				
90*	90+ CRI				
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
BEAM ANGLE ANGLE DE FAISAU					
NA	NARROW (24°)				
ME	MEDIUM (45°)				
OPTICAL ACCESSORIES ACCESSOIRES OPTIQUES					
CLR	CLEAR GLASS LENS				
FRO	FROSTED GLASS LENS				
HON	HONEYCOMB LOUVER				
SOL	SOLITE SOFTENING LENS				
CABLE CÂBLE					
C	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	C			
CABLE LENGTH LONGUEUR DE CÂBLE					
24	24" CABLE (STD LENGTH)				
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)				
MOUNTING MONTAGE					
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210				
TAB	ARENA ADAPTOR FOR ARENA RING 8200				
ADAPTER FINISH FINI ADAPTEUR					
BLKE	BLACK FINE TEXTURED				
WHE	WHITE FINE TEXTURED				
POWER CORD FINISH FINI ADAPTEUR					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CYLINDER FINISH FINI CYLINDRE					
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		
RAL** PLEASE SPECIFY RAL CODE					
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
BAFFLE FINISH FINI DÉFLECTEUR					
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN		
BRE*	BRICK RED	LNE*	LUNAR GREY		
RAL** PLEASE SPECIFY RAL CODE					
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					




SPECIFICATION

CELESTE 4010-CEL FOR ARENA 82X0

PROJECT PROJÉT
SPEC TYPE
NOTES




ADAPTER FINISH FINI DE L'ADAPTATEUR



BLKE WHE


HEAD & GLASS FINISH FINI TÊTE & VERRE

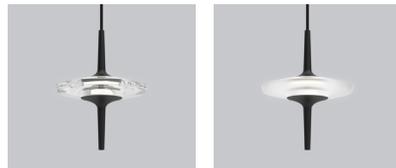

BLKE CLR BLKE FRO



WHE CLR WHE FRO

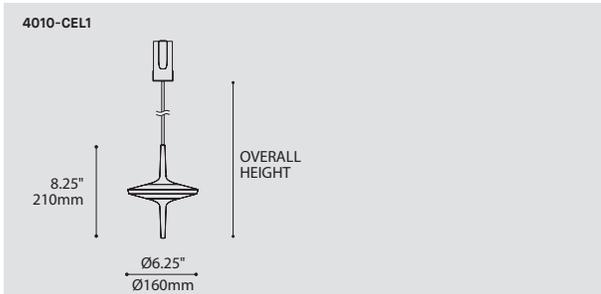

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		4010-CEL
4010-CEL	DROPLET CELESTE FOR ARENA	
CONFIGURATION CONFIGURATION		1
1	SINGLE UNIT 1 HEAD MIN. HEIGHT 16"	
LIGHT SOURCE SOURCE LUMINEUSE		LEDA
LEDA	SPECIAL OUTPUT FOR ARENA, 4W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
OVERALL HEIGHT HAUTEUR HORS TOUT		
24	24" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
MOUNTING MONTAGE		
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
TAB	ARENA ADAPTOR FOR ARENA RING 8200	
ADAPTER FINISH FINI ADAPTATEUR		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
HEAD FINISH FINI TÊTE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
GLASS FINISH FINI VERRE		
CLR	CLEAR GLASS	
FRO	FROSTED GLASS	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	Celeste is a clean minimalist pendant featuring an elegant artisanal casted glass disc. Vertical stems passing through the light fixture create a visual continuity with the cable, accentuated by the glowing glass disc to create a striking effect. Die casted aluminum caps with machined stems. Casted glass diffuser is offered in either clear or frost finish, structure coated in an architectural grade finely textured black paint.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. Cable length is not field adjustable and must be specified to desired length.
LIGHT SOURCE:	LED strip wrapped around a cylindrical heatsink. The light is blended through an internal diffuser, before shining through the thick glass disc.
ADAPTER:	Custom designed aluminum base offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	Celeste est un luminaire suspendu minimaliste doté d'un élégant disque en verre coulé artisanal. Les tiges verticales traversant le luminaire créent une continuité visuelle avec le câble, accentuée par un disque de verre brillant pour créer un effet saisissant. Embouts en aluminium moulé sous pression avec tiges usinées. Diffuseur en verre coulé offert en finis clair ou givré, structure revêtue d'une peinture noire finement texturée de qualité architecturale.
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité. La longueur du câble n'est pas ajustable sur le terrain et doit être spécifiée à la longueur souhaitée.
SOURCE LUMINEUSE:	Bande LED enroulée sur un dissipateur thermique cylindrique. La lumière est mélangée à travers un diffuseur interne, avant de briller à travers le disque en verre massif.
ADAPTATEUR:	Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
CERTIFIÉ:	c-CSA-us

MIKA 4230-8 FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES



ADAPTER FINISH FINI DE L'ADAPTEUR



BLKE

WHE

FAMILY FAMILLE



ARENA - BEAM 8290

ARENA - GLOW 8291

ARENA - AIM 8292


ARENA - BALL 8295



ARENA - CONE 8294

ARENA - SLICE SQ 8296

ARENA - ACOUSTIC 8298

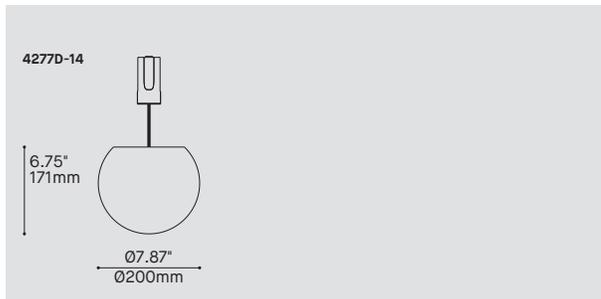

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		4230-8
4230-8	MIKA 8"	
LIGHT SOURCE SOURCE LUMINEUSE		LEDA
LEDA*	SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CABLE CÂBLE		C
C	BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
24	24" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
MOUNTING MONTAGE		
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
TAB	ARENA ADAPTOR FOR ARENA RING 8200	
ADAPTER FINISH FINI ADAPTEUR		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
POWER CORD FINISH FINI ADAPTEUR		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT




DESIGN:	Classic round globe with an evenly frosted shade of 8" diameter. Translucent white diffuser made of impact resistant rotomolded MDPE.
INSTALLATION:	Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety.
LIGHT SOURCE:	High performance LED module mounted on an extruded aluminum heatsink.
ADAPTER:	Custom designed aluminum base offered in white or black architectural grade finish.
CERTIFIED:	c-CSA-us
CONCEPTION:	Globe rond classique composé d'un diffuseur uniformément givré de 8" de diamètres. Diffuseur blanc translucide en MDPE rotomoulé résistant aux chocs.
INSTALLATION:	Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.
SOURCE LUMINEUSE:	Module DEL à haute intensité monté sur un radiateur en aluminium extrudé.
ADAPTEUR:	Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.
CERTIFIÉ:	c-CSA-us

MUTE 4258-16 FOR ARENA 82X0

PROJECT PROJÉT
SPEC TYPE
NOTES



ADAPTER FINISH FINI DE L'ADAPTATEUR




BLKE

WHE

SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

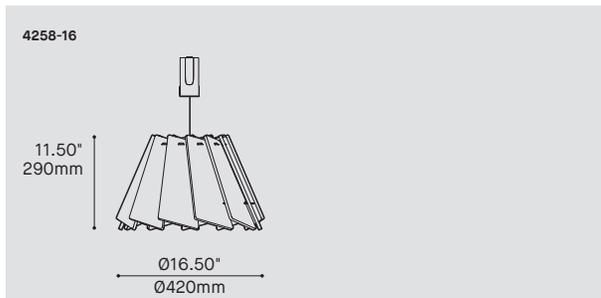

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4258-16 MUTE 16"	4258-16
LIGHT SOURCE SOURCE LUMINEUSE	LEDA SPECIAL OUTPUT FOR ARENA, 11W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	LEDA
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	27* 2700K 30 3000K 35 3500K 40 4000K *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)	80 80+ CRI 90* 90+ CRI *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
CABLE LENGTH LONGUEUR DE CÂBLE	24 24" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
MOUNTING MONTAGE	TAA ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210 TAB ARENA ADAPTOR FOR ARENA RING 8200	
ADAPTER FINISH FINI ADAPTATEUR	BLKE BLACK FINE TEXTURED WHE WHITE FINE TEXTURED	
POWER CORD FINISH FINI ADAPTATEUR	BLK BLACK POWER CORD WH WHITE POWER CORD	
SHADE FINISH FINI ABAT-JOUR	ABF AZURE BLUE FELT BYF BANANA YELLOW FELT REF RED FELT AWF ARCTIC WHITE FELT CHF CHARCOAL FELT SGF SILVER GRAY FELT BBF BASIC BLACK FELT NBF NAVY BLUE FELT TGF TITANIUM GRAY FELT BOF BLOOD ORANGE FELT OBF OCEAN BLUE FELT ZFF ZINFANDEL FELT BTF BATTLESHIP GRAY FELT PGF PEAR GREEN FELT PREMIUM* PLEASE SPECIFY PREMIUM COLOR CODE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE *LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Mute is a soft, colorful and sound absorbing downlight pendant composed of twelve felt acoustic panels surrounding a custom LED light source. Precision cut chrome top cover plate. The custom CNC cut felt panels are made from recycled PET bottles and are recyclable. Available in 30 colors.

INSTALLATION: Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. Clip-on acoustic panels.

LIGHT SOURCE: Custom LED light source distributing a uniform and direct light.

ADAPTER: Custom designed aluminum base offered in white or black architectural grade finish.

CERTIFIED: c-CSA-us

CONCEPTION: Ce luminaire chaleureux et coloré est composé de douze panneaux acoustiques feutrés encerclant une source DEL. Plaque chromée découpée avec précision

INSTALLATION: Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité. Panneaux acoustiques se fixant rapidement et sans outils autour du noyau central.

SOURCE LUMINEUSE: Mute est composée d'un module lumineux DEL fait sur mesure.

ADAPTATEUR: Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.


CERTIFIÉ: c-CSA-us

BLOOM 4269-XX FOR ARENA 82X0

PROJECT PROJET
SPEC TYPE
NOTES



ADAPTER FINISH FINI DE L'ADAPTATEUR



BLKE WHE

SHADE FINISH 10" FINI ABAT-JOUR 10"




BLKE WHE LGE PGE NBE

SHADE FINISH 15" FINI ABAT-JOUR 15"



BLKE WHE LGE PGE NBE

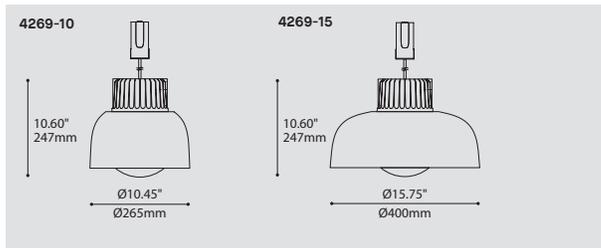

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4269-10	BLOOM 10"	
4269-15	BLOOM 15"	
LIGHT SOURCE SOURCE LUMINEUSE		LEDA
LEDA	SPECIAL OUTPUT FOR ARENA, 8W * TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CABLE CÂBLE		C
C	BLACK CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
24	24" CABLE (STD LENGTH)	
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
MOUNTING MONTAGE		
TAA	ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210	
TAB	ARENA ADAPTOR FOR ARENA RING 8200	
ADAPTER FINISH FINI ADAPTATEUR		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
POWER CORD FINISH FINI ADAPTATEUR		
BLK	BLACK POWER CORD	
WH	WHITE POWER CORD	
SHADE FINISH FINI CYLINDRE		
BLKE	BLACK FINE TEXTURED	
WHE	WHITE FINE TEXTURED	
LGE	LIGHT GREY FINE TEXTURED	
PGE	PALE GREEN FINE TEXTURED	
NBE	NAVY BLUE FINE TEXTURED	
RAL*	PLEASE SPECIFY RAL CODE	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: Bloom is a light fixture with a soft and inviting shape. Under the colorful shade hides a luminous globe offering a generous amount of soft light. Bloom is available in two sizes and a variety of different finishes. High-performance die-cast aluminum heatsink with textured black finish. Spun aluminum shades, offered in a wide variety of external finishes with a white internal finish for optimal light reflection.

INSTALLATION: Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety.

LIGHT SOURCE: A central powerful COB type light source project a powerful light, softened by the spherical polymer diffuser to create a light that is efficient, yet soft to the eye.

ADAPATER: Custom designed aluminum base offered in white or black architectural grade finish.

CERTIFIED: c-CSA-us

CONCEPTION: Bloom est un luminaire à la forme charmante et invitante. Sous l'abat-jour coloré, un globe lumineux offre une quantité généreuse de douce lumière. Bloom est offert en deux tailles et en une variété de finis. Radiateur haute performance en aluminium moulé sous pression, fini noir texturé. Réflecteurs en aluminium tourné, offert en une large variété de finis externes avec un fini interne blanc pour une réflexion lumineuse optimale.

INSTALLATION: Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.

SOURCE LUMINEUSE: Un projecteur central de type COB projette une puissante lumière, adoucie par un diffuseur sphérique en polymère, afin de créer une lumière efficace, mais plaisante pour l'œil.

ADAPTATEUR: Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.

CERTIFIÉ: c-CSA-us

MILL 4277D-14 FOR ARENA 82X0

PROJECT PROJCT
SPEC TYPE
NOTES



ADAPTER FINISH FINI DE L'ADAPTATEUR




BLKE WHE

SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

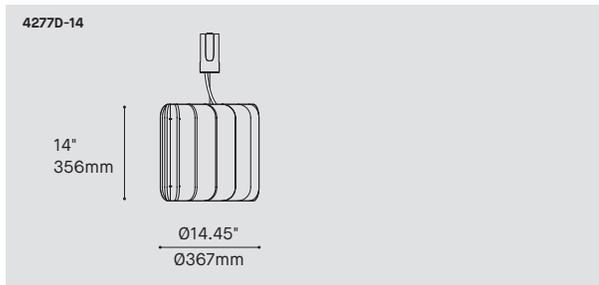

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE	4277D-14 MILL DIRECT 14"	4277D-14
LIGHT SOURCE SOURCE LUMINEUSE	LEDA*	LEDA
* TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W OR 180W DEPENDING ON THE SELECTED OPTION		
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR	27* 2700K 30 3000K 35 3500K 40 4000K	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX INDICE DE RENDU DE COULEUR (IRC)	80 80+ CRI 90* 90+ CRI	
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
CABLE CÂBLE	AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC
CABLE LENGTH LONGUEUR DE CÂBLE	24 24" CABLE (STD LENGTH) ** CUSTOM CABLE LENGTH (PLEASE SPECIFY)	
MOUNTING MONTAGE	TAA ARENA ADAPTOR FOR ARENA SQUARE & RECTANGLE 8220 & ARENA STRAIGHT 8210 TAB ARENA ADAPTOR FOR ARENA RING 8200	
ADAPTER FINISH FINI ADAPTATEUR	BLKE BLACK FINE TEXTURED WHE WHITE FINE TEXTURED	
POWER CORD FINISH FINI ADAPTATEUR	BLK BLACK POWER CORD WH WHITE POWER CORD	
SHADE FINISH FINI ABAT-JOUR	ABF AZURE BLUE FELT BYF BANANA YELLOW FELT REF RED FELT AWF ARCTIC WHITE FELT CHF CHARCOAL FELT SGF SILVER GRAY FELT BBF BASIC BLACK FELT NBF NAVY BLUE FELT TGF TITANIUM GRAY FELT BOF BLOOD ORANGE FELT OBF OCEAN BLUE FELT ZFF ZINFANDEL FELT BTF BATTLESHIP GRAY FELT PGF PEAR GREEN FELT	
PREMIUM* PLEASE SPECIFY PREMIUM COLOR CODE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE		
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR	WH WHITE	WH

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



DESIGN: With its fifteen acoustic panels shade, Mill offers an original soft aesthetic and atmosphere enhancing functionality. Mill will help with volume control while adding a stunning design element to the decor. The custom CNC cut rigid felt acoustic panels are available in 30 colors. Composed of at least 40% of recycled polyethylene bottles (PET) which make them recyclable and odorless.

INSTALLATION: Magnetically positioned anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment. The adapter has a hook for extra safety. This pendant offers evenly diffused lighting with a COB light source.

LIGHT SOURCE: Custom designed aluminum base offered in white or black architectural grade finish.

CERTIFIED: c-CSA-us

CONCEPTION: Avec son abat-jour de quinze panneaux acoustiques, Mill offre une esthétique et une atmosphère douce améliorant sa fonctionnalité. Mill vous aidera à contrôler le volume sonore de l'espace tout en ajoutant un élément de design époustouffant au décor. Découpés sur mesure, les panneaux acoustiques en feutre synthétique rigide sont disponibles en 30 couleurs. Composés principalement d'au moins 40% de bouteilles de polyéthylène recyclées (PET), ces panneaux sont recyclables et inodores.

INSTALLATION: Positionné magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur site. L'adaptateur est muni d'un crochet pour une double sécurité.

SOURCE LUMINEUSE: Pourvu d'une source lumineuse de type COB, ce luminaire offre un éclairage uniforme.

ADAPTATEUR: Base en aluminium conçu sur mesure offert avec une finition noire ou blanche de grade architectural.

CERTIFIÉ: c-CSA-us

ARENA – ACOUSTIC 8297

PROJECT PROJÉT
SPEC TYPE
NOTES

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE CODE

MODEL MODÈLE

8297-40* ARENA – ACOUSTIC 40" (ONLY FOR 8220-36x36, 8220-36x54, 8220-36x96)
8297-58* ARENA – ACOUSTIC 58" (ONLY FOR 8220-54X54, 8220-36X54, 8220-54X96)
* ARENA – ACOUSTIC BAFFLE IS AN ACCESSORY USED WITH ARENA 8210** OR 8220 (SOLD SEPARATELY)
 ** USE WITH ARENA 8210 WHEN TWO LINEAR ARE INSTALLED AT 36" OR 54" IN FRONT OF EACH OTHER

BAFFLE FINISH FINI DÉFLECTEUR


ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		

PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE
*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM

- DESIGN:** This double layered acoustic baffle absorbs noise frequencies with a soft and functional aesthetic which enhances a rooms atmosphere. This sleek acoustic Arena accessory will help with volume control while adding a stunning design element to the decor.
- INSTALLATION:** Panels are placed on the ARENA STRAIGHT or SQUARE, no hardware required for easy on-site installation or reconfiguration of the lighting environment. You can install as many baffles as desired on the fixture.
- BAFFLE:** Custom CNC cut rigid felt acoustic panels available in 30 colors. Composed of minimum 40% of recycled polyethylene bottles (PET). Fully recyclable and odorless.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Avec ses doubles panneaux acoustiques, son esthétique douce et fonctionnelle rehausse l'ambiance. Cet élégant accessoire acoustique vous aidera à contrôler le volume de votre espace tout en ajoutant un élément de design époustoufflant au décor.
- INSTALLATION:** Les panneaux sont déposés sur le luminaire ARENA STRAIGHT ou SQUARE, aucun matériel n'est requis pour une installation ou une reconfiguration facile sur site. Vous pouvez installer cet accessoire autant de fois que vous le souhaitez.
- PANNEAU:** Les panneaux acoustiques en feutre rigide découpés CNC sur mesure sont disponibles en 30 couleurs. Composés d'au moins 40% de bouteilles en polyéthylène recyclé (PET) qui les rendent recyclables et inodores.
- CERTIFIÉ:** c-CSA-us

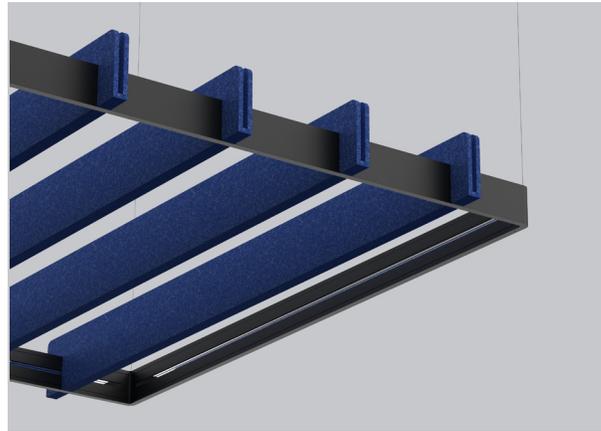

SHADE FINI



ADDITIONAL PREMIUM COLORS AVAILABLE - SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE


FAMILY FAMILLE



ARENA - BEAM 8290 ARENA - GLOW 8291 ARENA - AIM 8292 ARENA - BALL 8295




ARENA - CONE 8294 ARENA - SLICE SQ 8296 ARENA - ACOUSTIC 8298

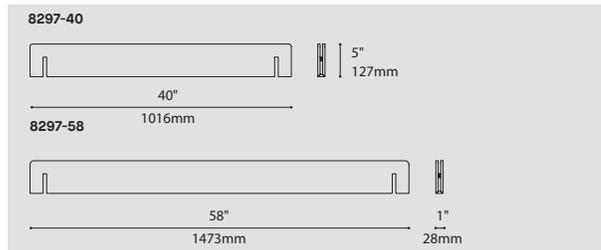

ARENA – ACOUSTIC SUSPENDED 8298

PROJECT PROJÉT
SPEC TYPE
NOTES

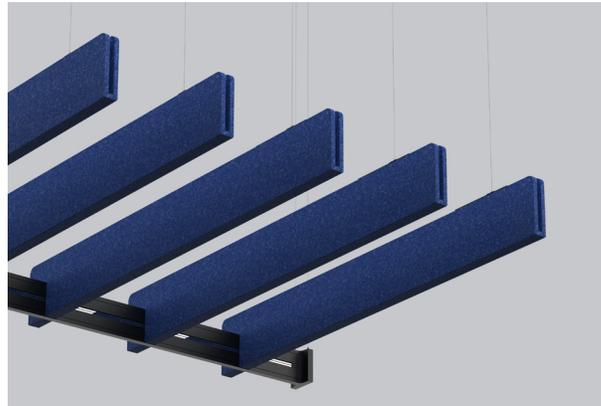


SHADE FINI



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

FAMILY FAMILLE

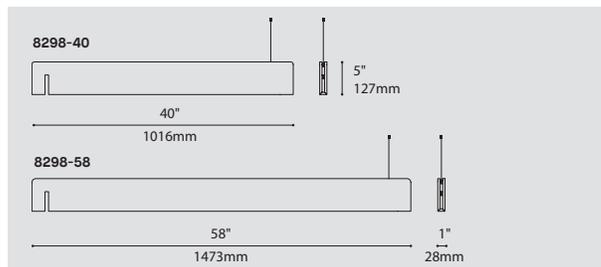

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
MODEL MODÈLE					
8298-40	ARENA – ACOUSTIC BAFFLE 40" WITH SUSPENSION CABLE				
8298-58	ARENA – ACOUSTIC BAFFLE 58" WITH SUSPENSION CABLE				
ARENA – ACOUSTIC BAFFLE IS AN ACCESSORY USED WITH ARENA 8210 OR 8220 (SOLD SEPARATELY)					
CABLE CÂBLE					
AC	60" CABLE (STD LENGTH)				
**	CUSTOM CABLE LENGTH (PLEASE SPECIFY)				
BAFFLE FINISH FINI DÉFLECTEUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		

PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE
*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM

- DESIGN:** This double layered acoustic baffle absorbs noise frequencies with a soft and functional aesthetic which enhances a rooms atmosphere. This sleek acoustic Arena accessory will help with volume control while adding a stunning design element to the decor.
- INSTALLATION:** The baffle is placed on the Arena on one end and supported on the other end by a ceiling mounted aircraft cable. You can install as many baffles as desired on the fixture.
- BAFFLE:** Custom CNC cut rigid felt acoustic panels available in 30 colors. Composed of minimum 40% of recycled polyethylene bottles (PET). Fully recyclable and odorless.
- CERTIFIED:** c-CSA-us
- CONCEPTION:** Avec ses doubles panneaux acoustiques de 40" ou 58", esthétique Avec ses doubles panneaux acoustiques, son esthétique douce et fonctionnelle rehausse l'ambiance. Cet élégant accessoire acoustique vous aidera à contrôler le volume de votre espace tout en ajoutant un élément de design époustouffant au décor.
- INSTALLATION:** L'accessoire est déposé d'un côté sur le luminaire ARENA et soutenue à l'autre extrémité par un câble d'acier et une attache au plafond. Vous pouvez en installer autant que vous le souhaitez sur le luminaire.
- PROJECTEUR:** Les panneaux acoustiques en feutre rigide découpés CNC sur mesure sont disponibles en 30 couleurs. Composés d'au moins 40% de bouteilles en polyéthylène recyclé (PET) qui les rendent recyclables et inodores.
- CERTIFIÉ:** c-CSA-us