ARENA – BALL 8295

PROJECT PROJET

SPEC TYPE

NOTES

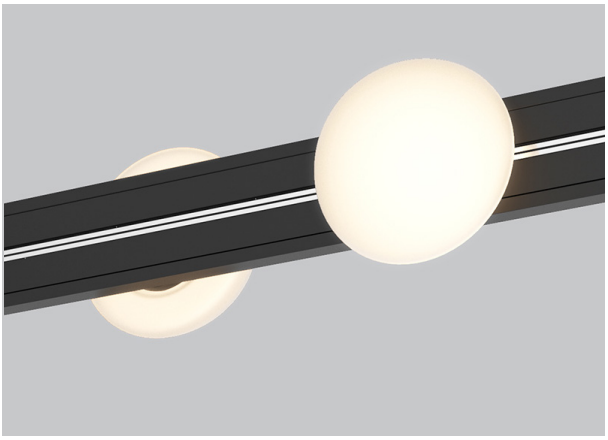

FAMILY FAMILLE

ARENA - BEAM **8290**

ARENA - GLOW **8291**

ARENA - AIM **8292**



ARENA - BALL **8295**

ARENA - CONE **8294**

ARENA - SLICE SQ **8296**



ARENA - ACOUSTIC **8298**

8295



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE		**8295**
8295*	ARENA – BALL	
	* ARENA – BALL IS AN ACCESSORY LIGHT SOURCE USED WITH ARENA 8200, 8210 OR 8220 (SOLD SEPARATELY)	
LIGHT SOURCE SOURCE LUMINEUSE		**LED**
LED	REGULAR OUTPUT, 8W	
	TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W.	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		**80**
80	80 CRI	
HEATSINK FINISH FINI DU MODULE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
DIFFUSER FINISH FINI DIFFUSEUR		**WH**
WH	WHITE	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT

BIM DIM IES LED

DESIGN: ALL is half a sphere when mounted on one side of the ARENA and can make a full globe effect when installed mirrored to each other on the straight fixture.

INSTALLATION: Magnetically positioned instantly anywhere on the ARENA for easy on-site installation or reconfiguration of the lighting environment.

LIGHT SOURCE: COB LED uniformly diffused.

BASE: Custom designed machined aluminum heatsink offered in white or black architectural grade powder coated finish.

CERTIFIED: c-CSA-us

CONCEPTION: BALL est une demi-sphère lorsqu'elle est montée sur un seul côté du Arena et peut former une sphère presque parfaite lorsque plusieurs sont installées symétriquement sur la version droite du luminaire.

INSTALLATION: Positionnée magnétiquement n'importe où sur l'ARENA pour faciliter l'installation ou la reconfiguration de l'éclairage sur place.

SOURCE LUMINEUSE: DEL de type COB avec une diffusion uniforme.

BASE: Dissipateur thermique usiné en aluminium conçu sur mesure et offert avec une finition noire ou blanche de grade architectural.

CERTIFIÉ: c-CSA-us

© 2026 Acuity Brands Lighting, Inc. All rights reserved.

ARENA - BALL 8295

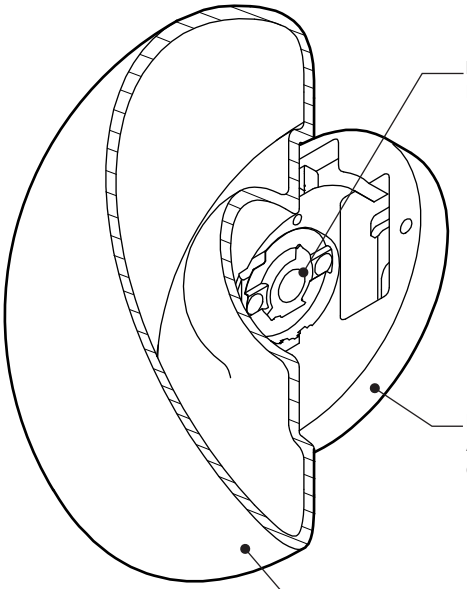

PERFORMANCE
High powered COB LED.

HEAT MANAGEMENT
A slick aluminum base dissipates the excess heat

GLOW
The rotomolded LLDPE diffuser creates a soft and pleasing glow



Ø5.27”
Ø134mm

2.64”
67mm

Compatible with **ARENA RING (8200)**, **ARENA STRAIGHT (8210)** and **ARENA SQUARE (8220)** (sold separately)

A SOFT LIGHT DOME
Create your own array of BALLs along any ARENA structure for a distinctive mellow light.
It’s transluscent white diffuser displays a smooth half sphere when mounted on Arena and creates a perfect sphere when mirrored to eachother on ARENA STRAIGHT.

CUSTOM*
The quantity and position of BALL on the structure can be modified as desired.

* view ARENA MAPPING table for power and weight limit

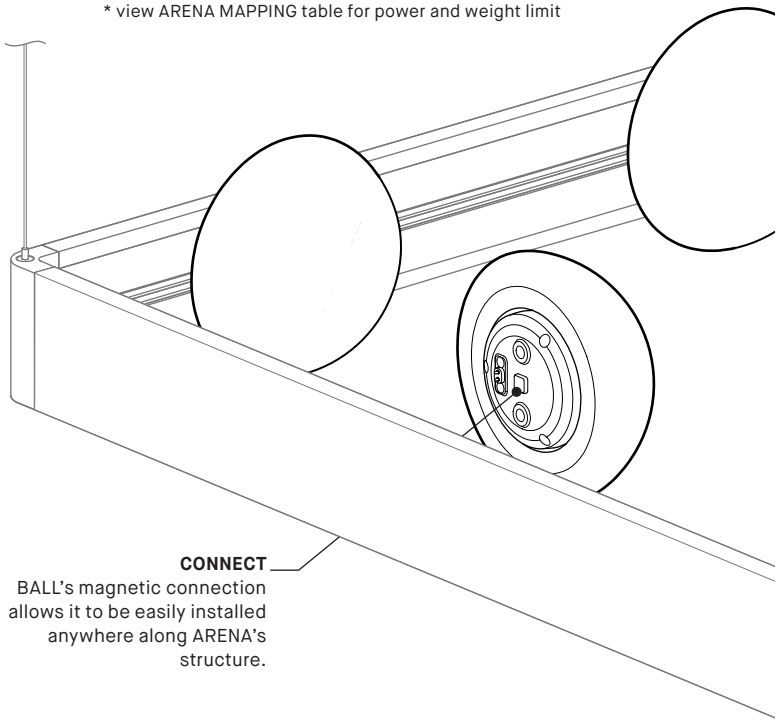

CONNECT
BALL’s magnetic connection allows it to be easily installed anywhere along ARENA’s structure.

PRODUCT SPECIFICATIONS

PERFORMANCE	
SYSTEM WATTAGE	8W
DELIVERED LUMENS (4000K)	678 LM
EFFICACY	88 LM/W
OTHER INFORMATION	
WEIGHT	0.48LBS / 0.22KG
L70 (LUMEN MAINTENANCE)	55,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION



8295

5 years warranty

Visit our website for warranty terms and conditions.

EUREKA

TECHNICAL DATA

All right reserved and all designs protected by copyrights. Eureka Lighting reserves the right to change or modify specification without notification.

ARENA - BALL 8295

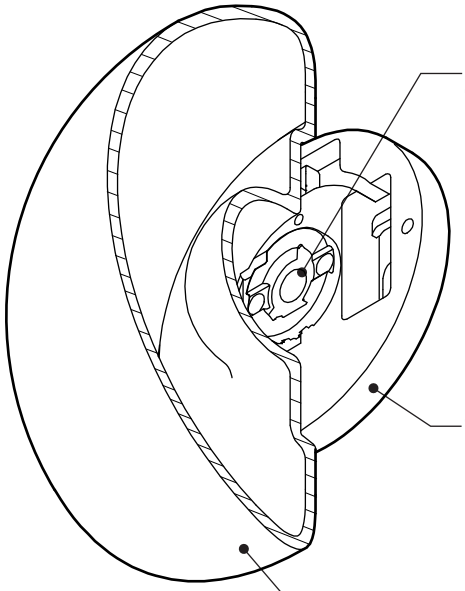

PERFORMANCE
COB DEL haute puissance

GESTION DE CHALEUR
La base en aluminium dissipe l'excès de chaleur

DIFFUSION
Le diffuseur en LLDPE rotomoulé transmet une lumière douce et agréable



Compatible avec **ARENA RING (8200)**, **ARENA STRAIGHT (8210)** and **ARENA SQUARE (8220)** (vendus séparément)

DÔME LUMINEUX
Créer votre propre ensemble de BALL le long de n'importe quelle structure ARENA pour un éclairage unique.
Son diffuseur blanc translucide forme une demi-sphère lumineuse et peut créer une sphère complète quand elle est positionnée dos-à-dos sur ARENA STRAIGHT.

PERSONNALISABLE*
La quantité et la position de BALL sur la structure peut être modifiée comme désiré.

* voir le tableau ARENA MAPPING pour la limite de poids

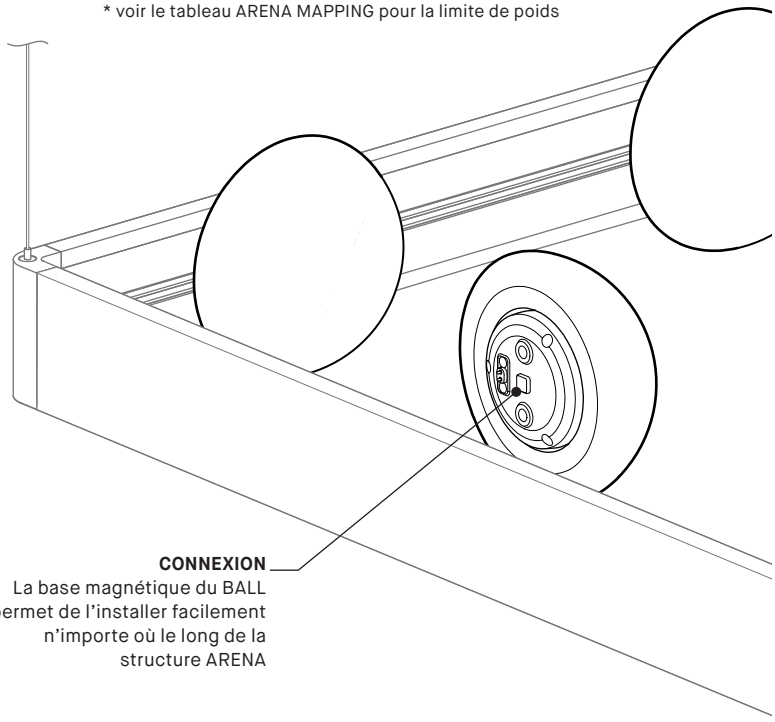

CONNEXION
La base magnétique du BALL permet de l'installer facilement n'importe où le long de la structure ARENA

SPÉCIFICATIONS PRODUIT

PERFORMANCE	
PUISSANCE TOTALE	8W
LUMENS RÉELS (4000K)	678 LM
EFFICACITÉ	88LM/W
AUTRES INFORMATIONS	
POIDS	0.48LBS / 0.22KG
L70 (LUMEN MAINTENANCE)	55,000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE



8295

Visitez notre site Web pour les termes et conditions.

EUREKA

DONNÉES TECHNIQUES

Tous droits réservés et tous les dessins protégés par le droit d'auteur. Eureka Lighting se réserve le droit de changer ou de modifier les spécifications sans préavis.

Arena Mapping

MIXING LIGHT SOURCES IS POSSIBLE AND RECOMMENDED. TO HELP YOU DO SO, SUBSTRACT THE DC LOAD OF EACH LIGHT SOURCE FROM THE MAXIMUM DC LOAD OF ARENA.
DO NOT EXCEED MAXIMUM WEIGHT PER SIDE

LUMINAIRE

	ARENA RING	ARENA SQUARE & RECTANGLE			
FRAME CONFIGURATION *REFER TO 2D DRAWINGS FOR EACH SIZE.	8200-36 8200-54	8220-36X36 8220-36X54	8220-54X54 8220-36X96 8220-54X96 8220-96X96	8220-36X190 8220-54X190 8220-96X190 8220-190X190	8220-36X380 8220-54X380 8220-96X380 8220-190X380 8220-380X380
					
MAXIMUM TOTAL **DC LOAD OF ACCESSORY**	**90W** DC	**90W** DC	**180W** (**90W** DC PER 2 SIDES)	**360W** (**90W** DC PER SIDES)	**540W, 720W** (**90W** DC PER SECTION)
MAXIMUM TOTAL **WEIGHT OF ACCESSORY**	**25 LBS**	**25 LBS / SIDE**	**25 LBS / SIDE**	**25 LBS / SECTION**	**25 LBS / SECTION**

LUMINAIRE

	ARENA STRAIGHT		
FRAME CONFIGURATION *REFER TO 2D DRAWINGS FOR EACH SIZE.	8210-36 (1 SECTION) 8210-54 (1 SECTION) 8210-70 (2 SECTIONS)	8210-96 (1 SECTION) 8210-158 (3 SECTIONS) 8210-190 (2 SECTIONS)	8210-284 (3 SECTIONS) 8210-380 (4 SECTIONS)
MAXIMUM TOTAL **DC LOAD OF ACCESSORY**	**90W** (**90W** DC FOR BOTH SIDES)	**180W** (**90W** DC PER SECTION)	**360W** DC (**90W** DC PER SECTION)
MAXIMUM TOTAL **WEIGHT OF ACCESSORY**	**25 LBS / SECTION**	**25 LBS / SECTION**	**25 LBS / SECTION**

ACCESSORIES HEAD

	BEAM 8290	GLOW 8291	AIM 8292	CONE 8294	BALL 8295
LIGHT SOURCES					
DC LOAD	**8W** DC	**8W** DC	**8W** DC	**11W** DC	**8W** DC
WEIGHT LBS	**0.62** LBS	**0.70** LBS	**0.61** LBS	**0.88** LBS	**0.48** LBS

ACCESSORIES SLICE

	SLICE-ROUND 8293 (ONLY FOR 8200)		SLICE-SQUARE 8296	
	8293-36	8293-54	8296-36	8296-54
LIGHT SOURCES				
DC LOAD	**8W** DC	**11W** DC	**8W** DC	**11W** DC
WEIGHT LBS	**1.24** LBS	**1.65** LBS	**2.22** LBS	**3.50** LBS

ACCESSORIES ADAPTER

	MILL 14" 4277D-14	SCOUT Ø2.75" 4048-XX	SCOUT Ø4" 4049-XX	MIKA 8" 4230-8	BLOOM 4269-XX	MINI MUTE 4258-16	CELESTE 4010-CEL1
LIGHT SOURCES							
DC LOAD	**8W** DC	**8W** DC	**8W** DC	**8W** DC	**8W** DC	**11W** DC	**4W** DC
WEIGHT LBS	**11.3** LBS	MAX **4.32** LBS	MAX **6.05** LBS	**2.40** LBS	MAX **9.75** LBS	**5.83** LBS	**2.20** LBS

ACCESSORIES ACOUSTIC

	ACOUSTIC BAFFLE FOR ARENA SQUARE		ACOUSTIC BAFFLE FOR ARENA STRAIGHT	
	8297-40	8297-58	8298-40	8298-58
ACOUSTIC CONFIGURATION				
WEIGHT LBS	**1.38** LBS / PANEL	**1.63** LBS / PANEL	**1.38** LBS / PANEL	**1.63** LBS / PANEL
CONFIGURATION USE FOR ARENA	8220-36X36 8220-36X54 8220-36X96	8220-54X54 8220-36X54 8220-54X96	8210-XX 8220-XX	8210-XX 8220-XX

*WE RESERVE THE RIGHT TO MODIFY ANY INFORMATION AT ANY TIME.

EUREKA

ARENA 8200

PROJECT PROJET

SPEC TYPE

NOTES

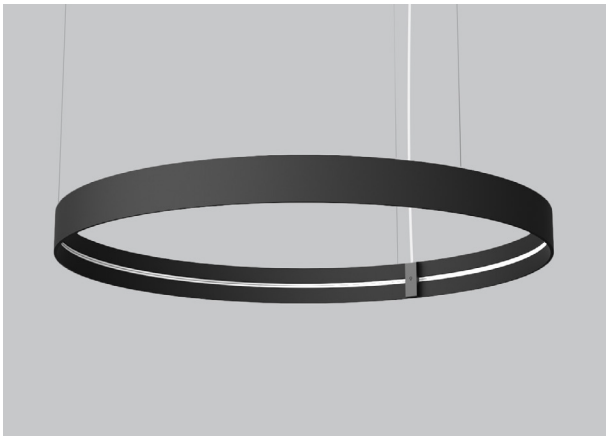

FAMILY FAMILLE



ARENA – BEAM **8290**

ARENA – GLOW **8291**

ARENA – SLICE **8293**

ARENA – AIM **8292**

FINISH FINI

BLKE

WHE

MOUNTING OPTIONS OPTIONS DE MONTAGE



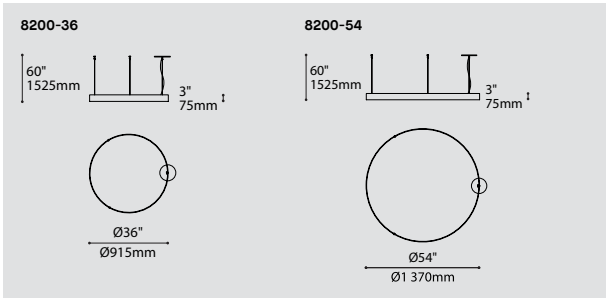

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

MODEL MODÈLE

8200-36	ARENA 36"
8200-54	ARENA 54"

MAXIMUM DC LOAD PUISSANCE MAXIMALE DC — **90W**

90W	90 WATT DC

TOTAL DC LOAD OF INSTALLED LIGHT SOURCES MUST NOT EXCEED 90W.
SEE MAPPING PAGE FOR ALL ACCESSORY AVAILABLE.

RING	LIGHT SOURCES				
	BEAM 8290	**GLOW** 8291	**AIM** 8292	**SLICE RD** 8293-36	**SLICE RD** 8293-54
ARENA 8200-36 & 8200-54					
MAXIMUM DC LOAD **90W**	**8W** DC	**8W** DC	**8W** DC	**8W** DC	**11W** DC

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV	0-10V DIMMING (120V-277V)
NLTAIR2*	NLIGHT AIR CONTROL GEN 2 (NOT AVAILABLE WITH MOUNTING OPTION RC3)
NLIGHT*	NLIGHT WIRED CONTROL (NOT AVAILABLE WITH MOUNTING OPTION RC3)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT).
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

CABLE CÂBLE — **AC**

AC	AIRCRAFT MOUNTING & CLEAR CABLE, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC2	ROUND SURFACE SCREWLESS CANOPY 1.87" (2475I)
RC3	ROUND SURFACE SCREWLESS CANOPY 0.50" FOR REMOTE DRIVER BOX 12"X16" (2471C)

* PAIR WITH ACCESSORY 3981GA

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

IF NO OPTION IS SELECTED, AN OFF-CENTERED ROUND CANOPY WITH STRAIGHT AIRCRAFT CABLES IS STANDARD

RCC	CENTERED ROUND CANOPY – STRAIGHT AIRCRAFT CABLES

CANOPY FINISH FINI PAVILLON

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK	BLACK POWER CORD
WH	WHITE POWER CORD
CLR	CLEAR POWER CORD

RING FINISH FINI DE L'ANNEAU

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3981GA-120	120V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
3981GA-277	277V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

© 2026 Acuity Brands Lighting, Inc. All rights reserved.

ARENA STRAIGHT 8210

PROJECT PROJET

SPEC TYPE

NOTES

FINISH FINI



BLKE



WHE

FAMILY FAMILLE

ARENA - BEAM **8290**

ARENA - GLOW **8291**

ARENA - AIM **8292**



ARENA - BALL **8295**

ARENA - CONE **8294**

ARENA - SLICE SQ **8296**



ARENA - ACOUSTIC **8298**

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

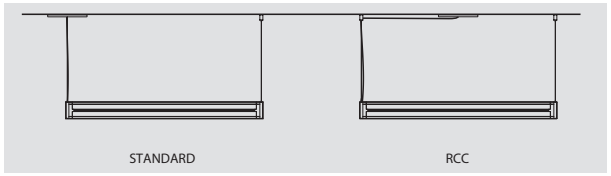

MOUNTING OPTION OPTION DE MONTAGE

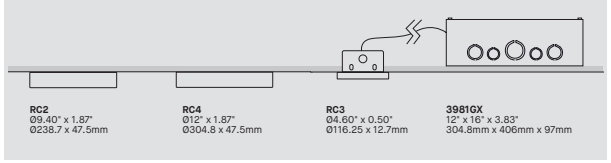

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

STANDARD MODEL MODÈLE STANDARD

8210-36	ARENA STRAIGHT 36''
8210-54	ARENA STRAIGHT 54''
8210-70	ARENA STRAIGHT 70'' (2 SECTIONS CONNECTED WITH 1 JOINER)
8210-96	ARENA STRAIGHT 96''
8210-158	ARENA STRAIGHT 158'' (3 SECTIONS CONNECTED WITH 2 JOINERS)
8210-190	ARENA STRAIGHT 190'' (2 SECTIONS CONNECTED WITH 1 JOINER)
8210-285	ARENA STRAIGHT 285'' (3 SECTIONS CONNECTED WITH 2 JOINERS)
8210-380	ARENA STRAIGHT 380'' (4 SECTIONS CONNECTED WITH 3 JOINERS)

FOR CUSTOM SIZES, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

DC LOAD PUISSANCE MAXIMALE DC

90W	1X 90 WATT (AVAILABLE FROM 36'' TO 96'')
180W	2X 90 WATT (AVAILABLE FROM 36'' TO 190'')
360W	4X 90 WATT (ONLY AVAILABLE FOR 285'' TO 380'')

ARENA	LIGHT SOURCES							
STRAIGHT 8210	**BEAM** 8290	**GLOW** 8291	**AIM** 8292	**SLICE-SQ** 8296-36	**SLICE-SQ** 8296-54	**BALL** 8295	**CONE** 8294	**ADAPTER** TAA
MAXIMUM DC LOAD **90W, 180W, 360W**	**8W** DC	**8W** DC	**8W** DC	**8W** DC	**11W** DC	**8W** DC	**11W** DC	SEE SPEC SHEET
MAXIMUM TOTAL WEIGHT PER SECTION **25 LBS**	**0.62** LBS	**0.70** LBS	**0.61** LBS	**2.22** LBS	**3.50** LBS	**0.48** LBS	**0.88** LBS	

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTIONS OPTION DE CONTRÔLE

DV	0-10V DIMMING (120V-277V)
NLTAIR2*	NLIGHT AIR CONTROL GEN2 (NOT AVAILABLE WITH MOUNTING OPTION RC3)
NLIGHT*	NLIGHT WIRED CONTROL (NOT AVAILABLE WITH MOUNTING OPTION RC3)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT). REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

CABLE CÂBLE — AC

AC	AIRCRAFT CABLE & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
****	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC2	ROUND SURFACE SCREWLESS CANOPY 9.4" FOR 90W ONLY (2475I)
RC3	ROUND SURFACE SCREWLESS CANOPY 4.6" FOR REMOTE DRIVER BOX 12"X16" (2471C) (PAIR WITH ACCESSORY 3981GA OR 3981GB)
RC4	ROUND SURFACE SCREWLESS CANOPY 12" FOR 180W OR 360W (2477I)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RCC	FLOATING CANOPY – STRAIGHT AIRCRAFT CABLES

IF NO OPTION IS SELECTED, A CANOPY AT END OF THE FIXTURE WITH AIRCRAFT CABLES IS STANDARD

CANOPY & GRIPPERS FINISH FINI PAVILLON ET ATTACHES

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK	BLACK POWER CORD
WH	WHITE POWER CORD
CLR	CLEAR POWER CORD

FRAME FINISH FINI DU CADRE

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

ACCESSORY ACCESSOIRE

3981GA-120	1X 120V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
3981GA-277	1X 277V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
3981GB-120	1X 120V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 180W
3981GB-277	1X 277V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 180W
3981GB2-120	2X 120V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 360W
3981GB2-277	2X 277V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 360W
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

EUREKA

SPECIFICATION

© 2026 Acuity Brands Lighting, Inc. All rights reserved.

ARENA STRAIGHT 8210

CONFIGURATIONS

8210-36
ARENA STRAIGHT 36"



8210-54
ARENA STRAIGHT 54"



8210-70
ARENA STRAIGHT 70.4"

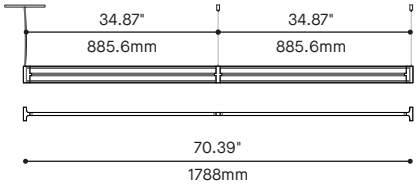

8210-96
ARENA STRAIGHT 96"

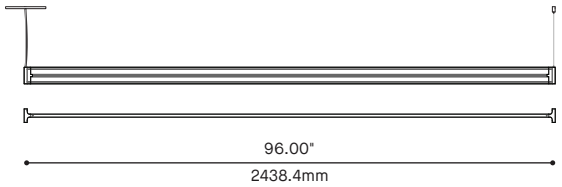

8210-158
ARENA STRAIGHT 158.78"

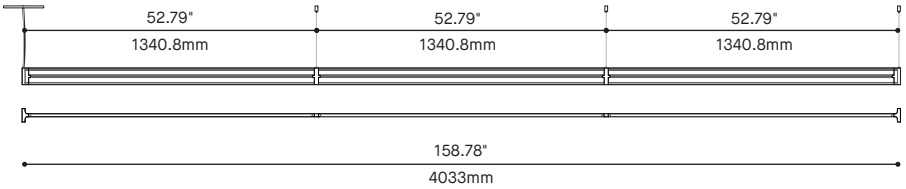

8210-190
ARENA STRAIGHT 190.39"

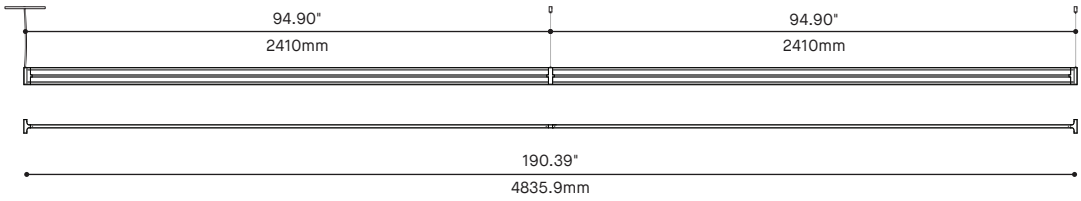

8210-284
ARENA STRAIGHT 284.7"

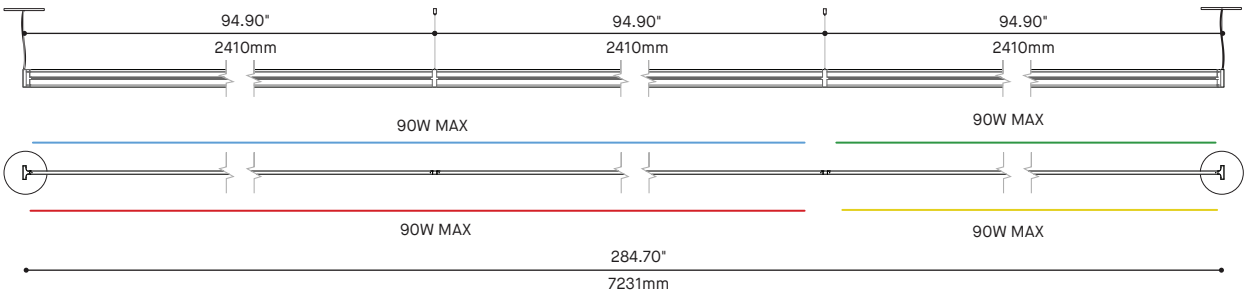

8210-380
ARENA STRAIGHT 379.6"

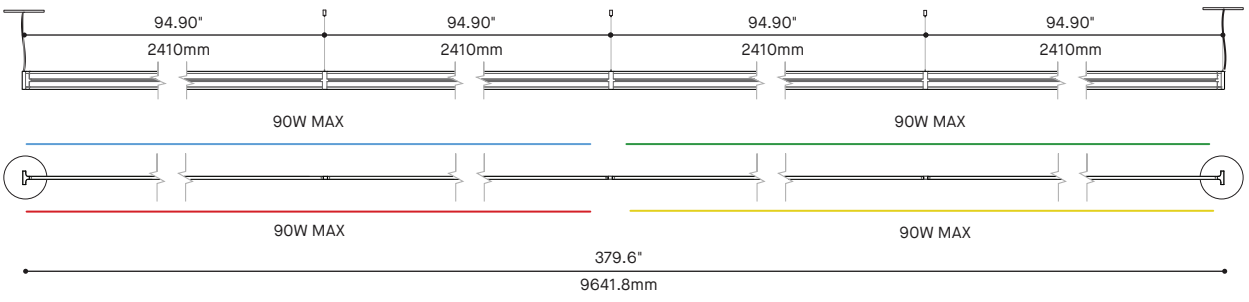

ARENA SQUARE & RECTANGLE 8220

PROJECT PROJET

SPEC TYPE

NOTES

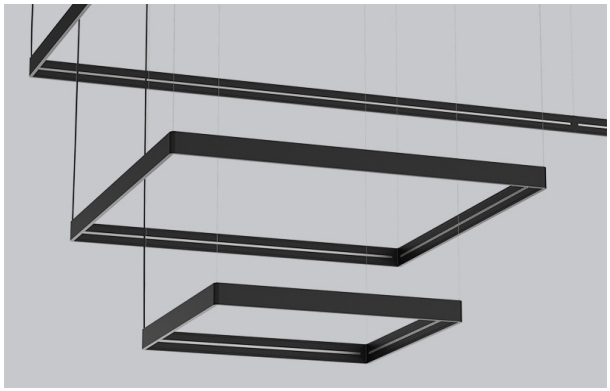

FINISH FINI



BLKE



WHE

FAMILY FAMILLE

ARENA - BEAM **8290**

ARENA - GLOW **8291**

ARENA - AIM **8292**



ARENA - BALL **8295**

ARENA - CONE **8294**

ARENA - SLICE SQ **8296**



ARENA - ACOUSTIC **8298**

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

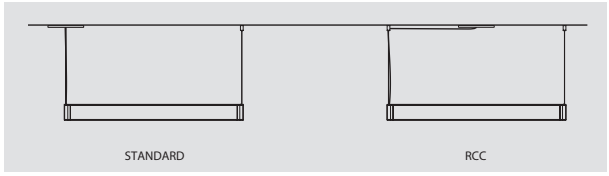

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE — CODE

STANDARD MODEL MODÈLE STANDARD

8220-36X36	ARENA SQUARE 36X36"	**8220-36X190**	ARENA RECTANGLE 36X190"
8220-54X54	ARENA SQUARE 54X54"	**8220-54X190**	ARENA RECTANGLE 54X190"
8220-96X96	ARENA SQUARE 96X96"	**8220-96X190**	ARENA RECTANGLE 96X190"
8220-190X190	ARENA SQUARE 190X190"	**8220-36X380**	ARENA RECTANGLE 36X380"
8220-380X380	ARENA SQUARE 380X380"	**8220-54X380**	ARENA RECTANGLE 54X380"
8220-36X54	ARENA RECTANGLE 36X54"	**8220-96X380**	ARENA RECTANGLE 96X380"
8220-36X96	ARENA RECTANGLE 36X96"	**8220-190X380**	ARENA RECTANGLE 190X380"
8220-54X96	ARENA RECTANGLE 54X96"		

FOR CUSTOM SIZES, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

DC LOAD PUISSANCE MAXIMALE DC

90W	1 CANOPY / 1 DRIVER OF 90W
180W	1 CANOPY / 2 DRIVERS OF 90W
360W	2 CANOPY / 4 DRIVERS OF 90W
540W	4 CANOPY / 6 DRIVERS OF 90W
720W	4 CANOPY / 8 DRIVERS OF 90W

8220	**36"**	**54"**	**96"**	**190"**	**380"**
36"	90W				
54"		180W	180W	360W	540W
96"					
190"					
380"					720W

ARENA	**LIGHT SOURCES**							
SQUARE 8220	**BEAM** 8290	**GLOW** 8291	**AIM** 8292	**SLICE-SQ** 8296-36	**SLICE-SQ** 8296-54	**BALL** 8295	**CONE** 8294	**ADAPTER** TAA
								
MAXIMUM DC LOAD **SEE TABLE**	**8W** DC	**8W** DC	**8W** DC	**8W** DC	**11W** DC	**8W** DC	**11W** DC	SEE SPEC SHEET
MAXIMUM TOTAL WEIGHT PER SECTION **25 LBS**	**0.62** LBS	**0.70** LBS	**0.61** LBS	**2.22** LBS	**3.50** LBS	**0.48** LBS	**0.88** LBS	

VOLTAGE VOLTAGE

120V	120 VOLT
277V	277 VOLT

CONTROL OPTIONS OPTION DE CONTRÔLE

DV	0-10V DIMMING (120V-277V)
NLTAIR2*	NLIGHT AIR CONTROL GEN2 (NOT AVAILABLE WITH MOUNTING OPTION RC3)
NLIGHT*	NLIGHT WIRED CONTROL (NOT AVAILABLE WITH MOUNTING OPTION RC3)

LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAA & 39NLWA AS BELOW FOR NLIGHT).
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.

CABLE CÂBLE — **AC**

AC	AIRCRAFT CABLE & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60	60" AIRCRAFT CABLE (STD LENGTH)
******	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)

FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.

MOUNTING MONTAGE

RC2	ROUND SURFACE SCREWLESS CANOPY 9.4" FOR 90W ONLY (2475I)
RC3	ROUND SURFACE SCREWLESS CANOPY 4.6" FOR REMOTE DRIVER BOX 12"X16" (2471C) (PAIR WITH ACCESSORY 3981GA OR 3981GB)
RC4	ROUND SURFACE SCREWLESS CANOPY 12" FOR 180W OR 360W (2477I)

MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE

RCC	FLOATING CANOPY – STRAIGHT AIRCRAFT CABLES

IF NO OPTION IS SELECTED, A CANOPY AT CORNERS OF THE FIXTURE WITH AIRCRAFT CABLES IS STANDARD

CANOPY & GRIPPERS FINISH FINI PAVILLON ET ATTACHES

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK	BLACK POWER CORD
WH	WHITE POWER CORD
CLR	CLEAR POWER CORD

FRAME FINISH FINI DU CADRE

BLKE	BLACK FINE TEXTURE
WHE	WHITE FINE TEXTURE

© 2026 Acuity Brands Lighting, Inc. All rights reserved.

MOUNTING OPTION OPTION DE MONTAGE

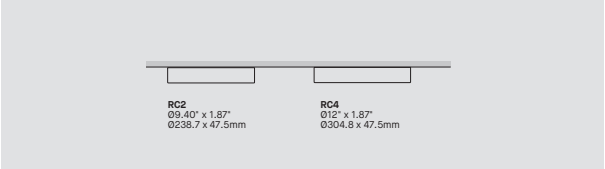

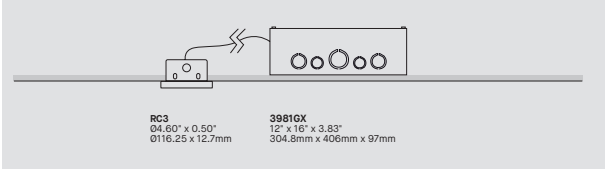

ACCESSORY	ACCESSOIRE
3981GA-120	1X 120V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
3981GA-277	1X 277V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 90W
3981GB-120	1X 120V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 180W
3981GB-277	1X 277V NON-IC REMOTE DRIVER BOX 12"X16" FOR MOUNTING RC3 FOR DC LOAD 180W
3981GB2-120	2X 120V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 360W
3981GB2-277	2X 277V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 360W
3981GB3-120	3X 120V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 540W
3981GB3-277	3X 277V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 540W
3981GB4-120	4X 120V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 720W
3981GB4-277	4X 277V NON-IC REMOTE DRIVER BOXES 12"X16" FOR MOUNTING RC3 FOR DC LOAD 720W
39NLAA*	NLIGHT AIR GEN 2 REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)
39NLWA*	NLIGHT WIRED REMOTE CONTROLLER (NOT AVAILABLE WITH MOUNTING OPTION RC3)

* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

© 2026 Acuity Brands Lighting, Inc. All rights reserved.

ARENA SQUARE 8220

CONFIGURATIONS

8220-36X36
ARENA SQUARE 36" x 36"

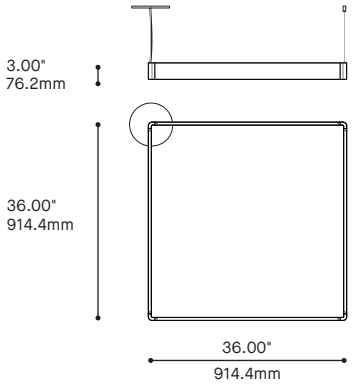

8220-54X54
ARENA SQUARE 54" x 54"

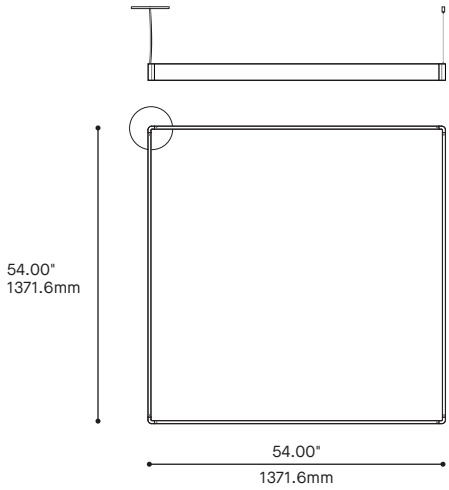

8220-380X380
ARENA SQUARE 380" x 380"

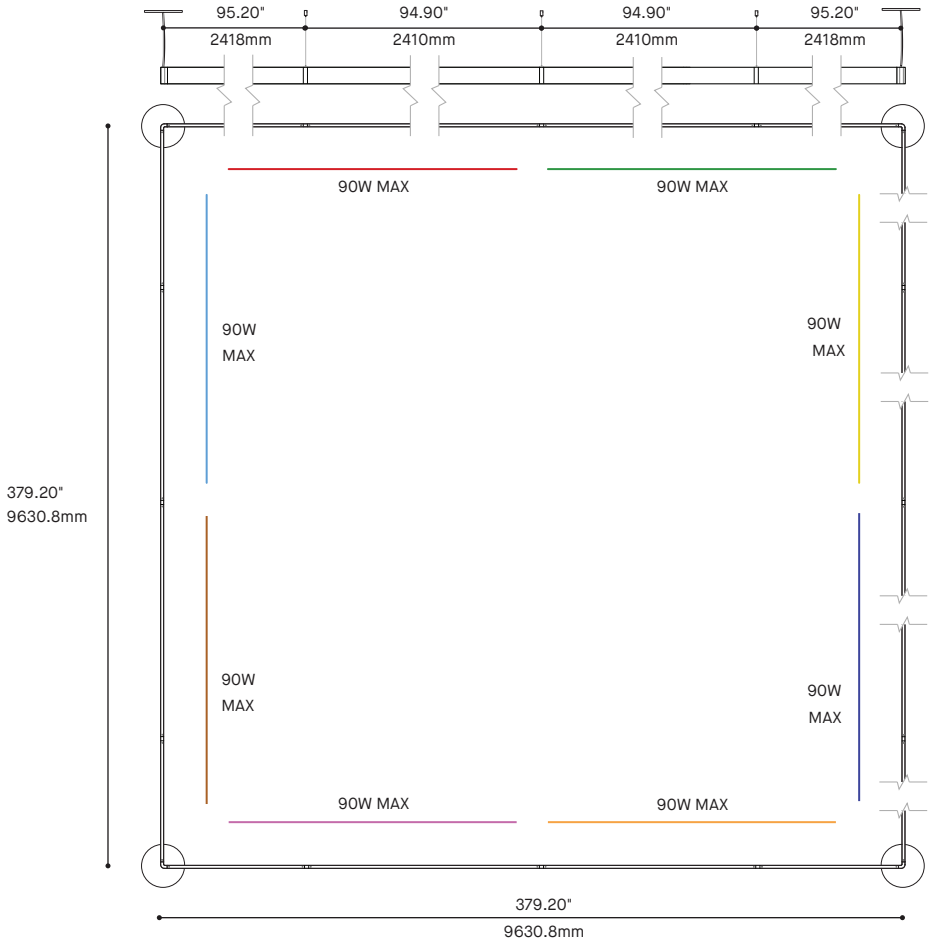

8220-96X96
ARENA SQUARE 96" x 96"

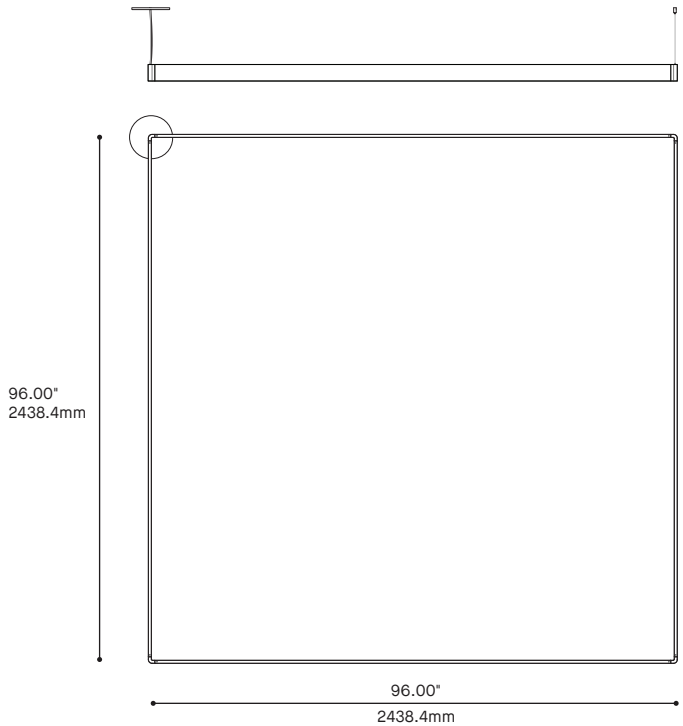

8220-190X190
ARENA SQUARE 190" x 190"

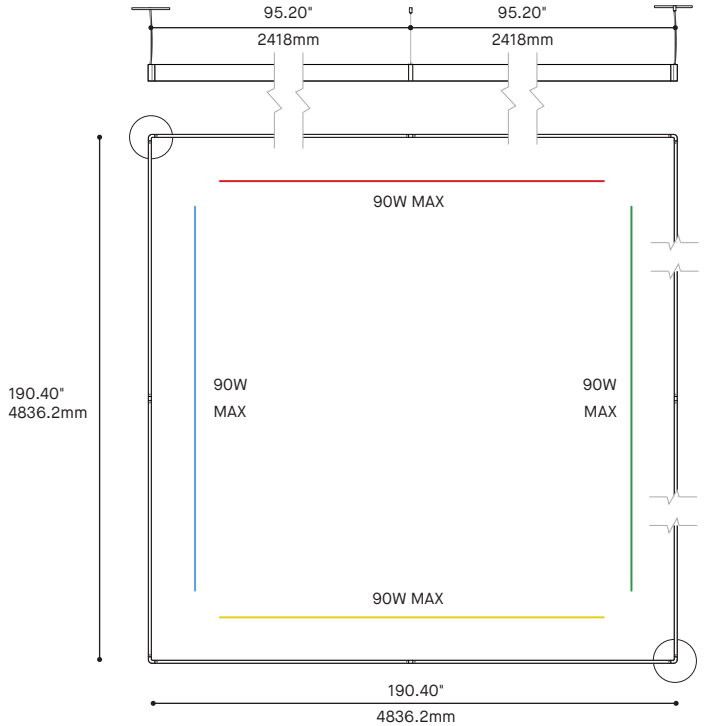

ARENA RECTANGLE 8220 1/2

CONFIGURATIONS

8220-36X96
ARENA RECTANGLE 36" x 96"

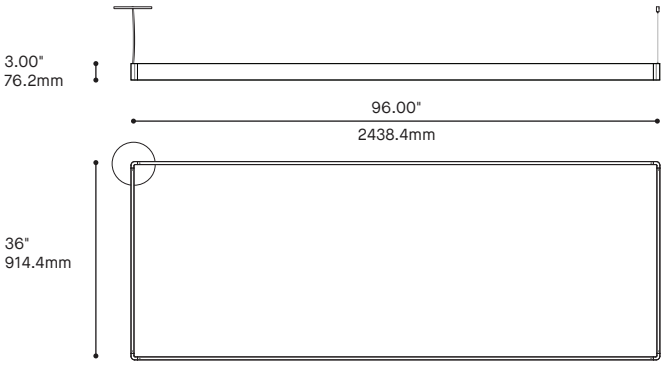

8220-54X96
ARENA RECTANGLE 54" x 96"

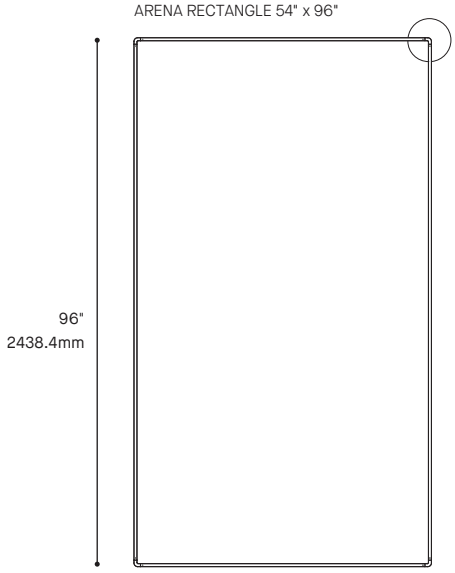

8220-36X54
ARENA RECTANGLE 36" x 54"

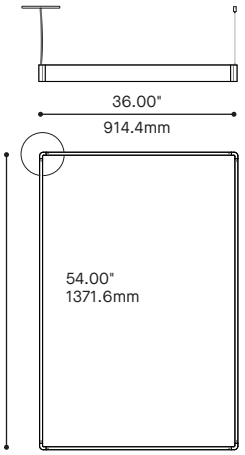

8220-96X190
ARENA RECTANGLE 96" x 190"

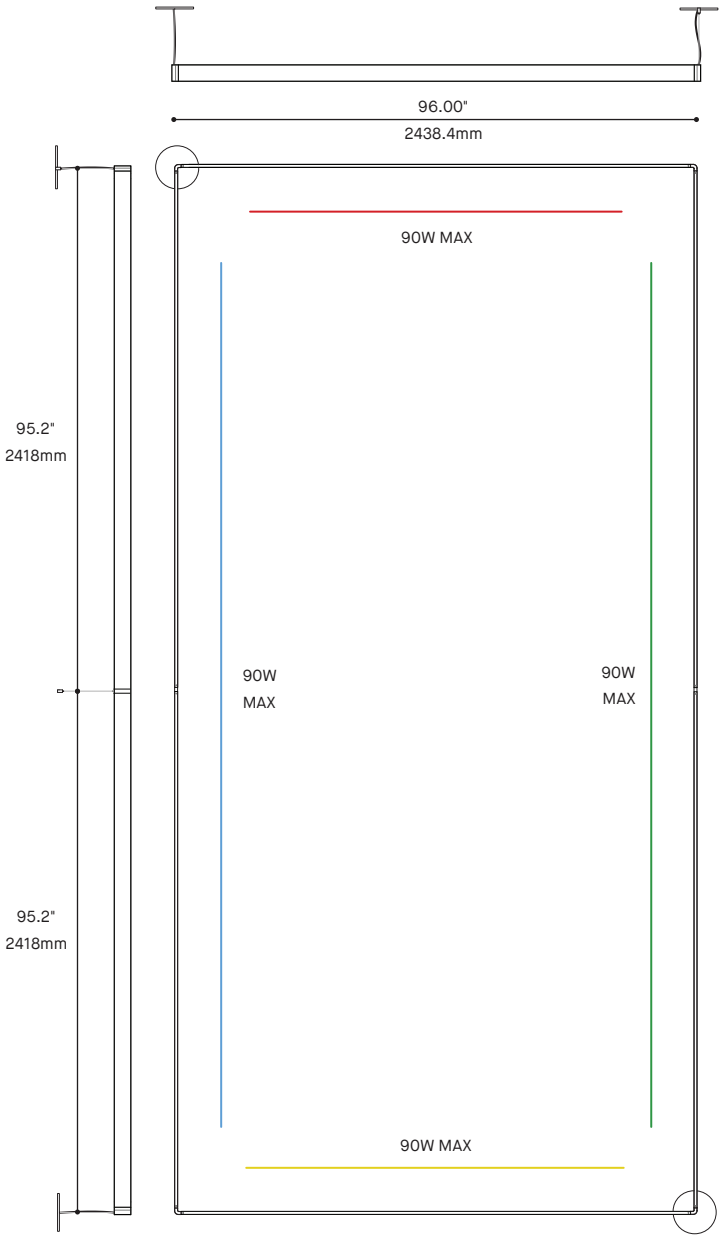

8220-54X190
ARENA RECTANGLE 54" x 190"

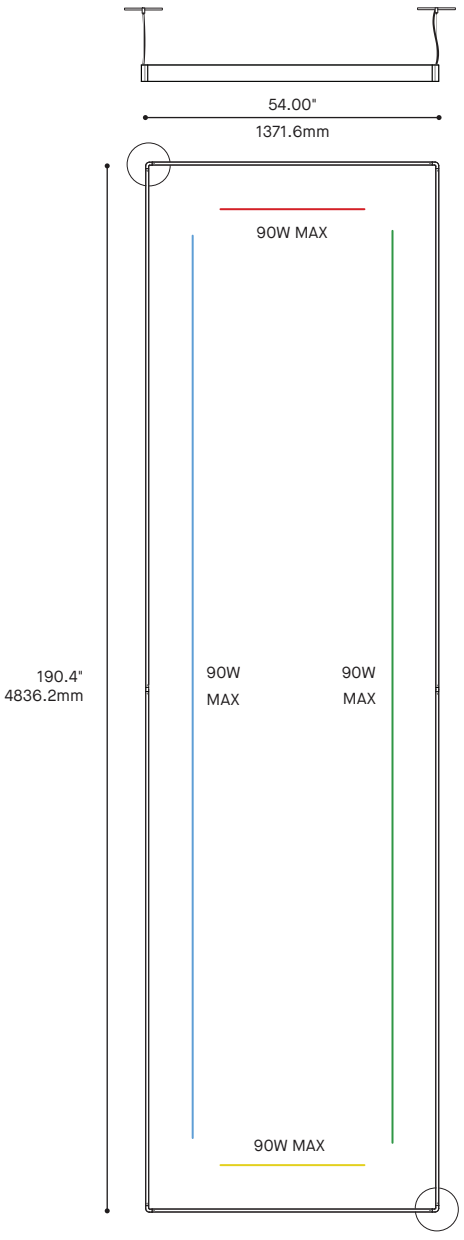

8220-36X190
ARENA RECTANGLE 36" x 190"

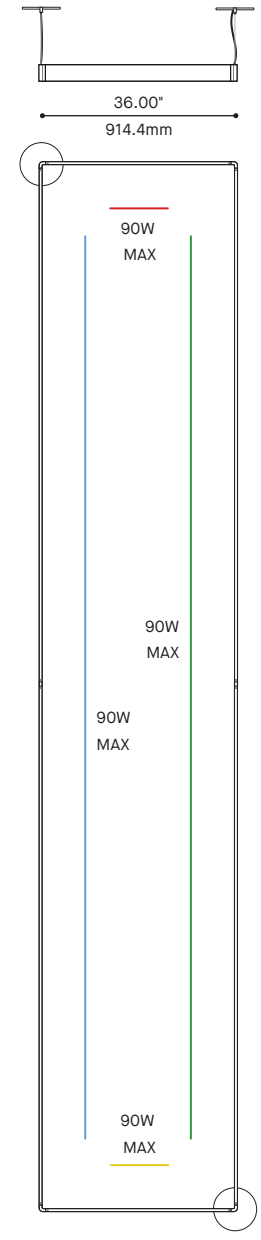

ARENA RECTANGLE 8220 2/2

CONFIGURATIONS

8220-96X380
ARENA SQUARE 96" x 380"

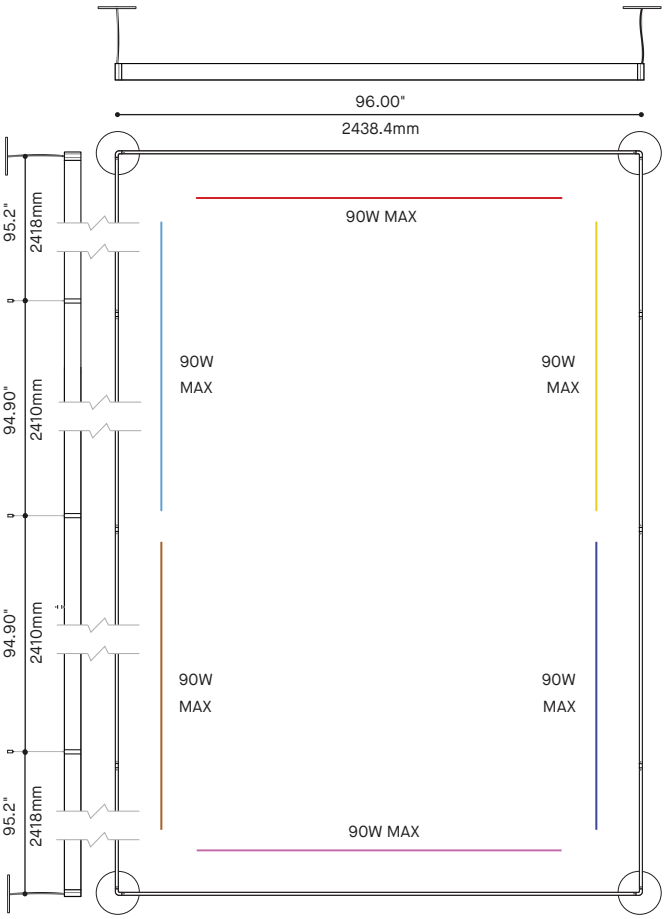

8220-54X380
ARENA RECTANGLE 54" x 380"

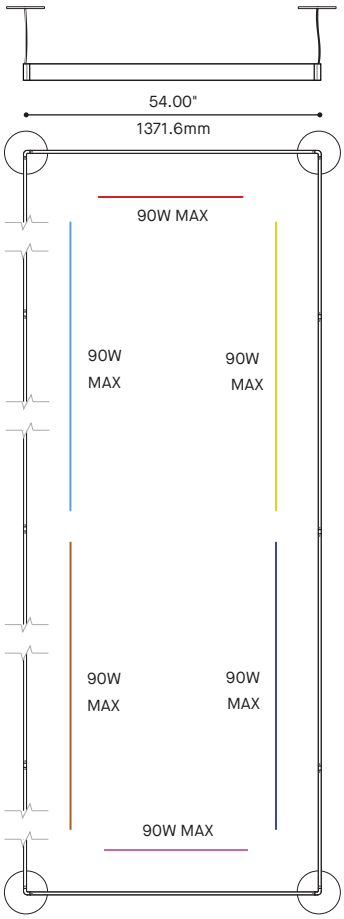

8220-36X380
ARENA RECTANGLE 36" x 380"

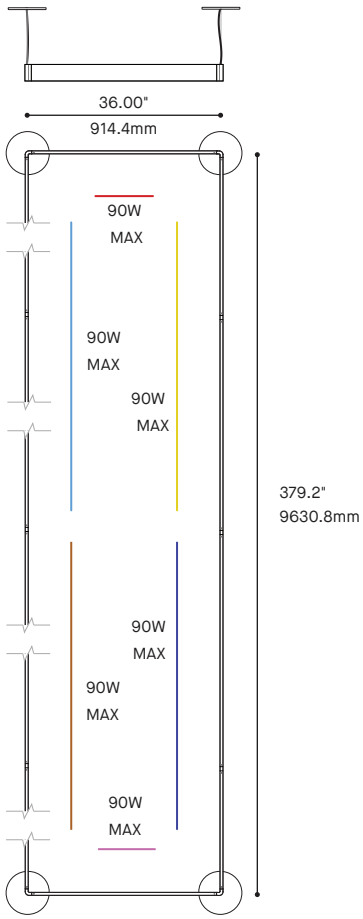
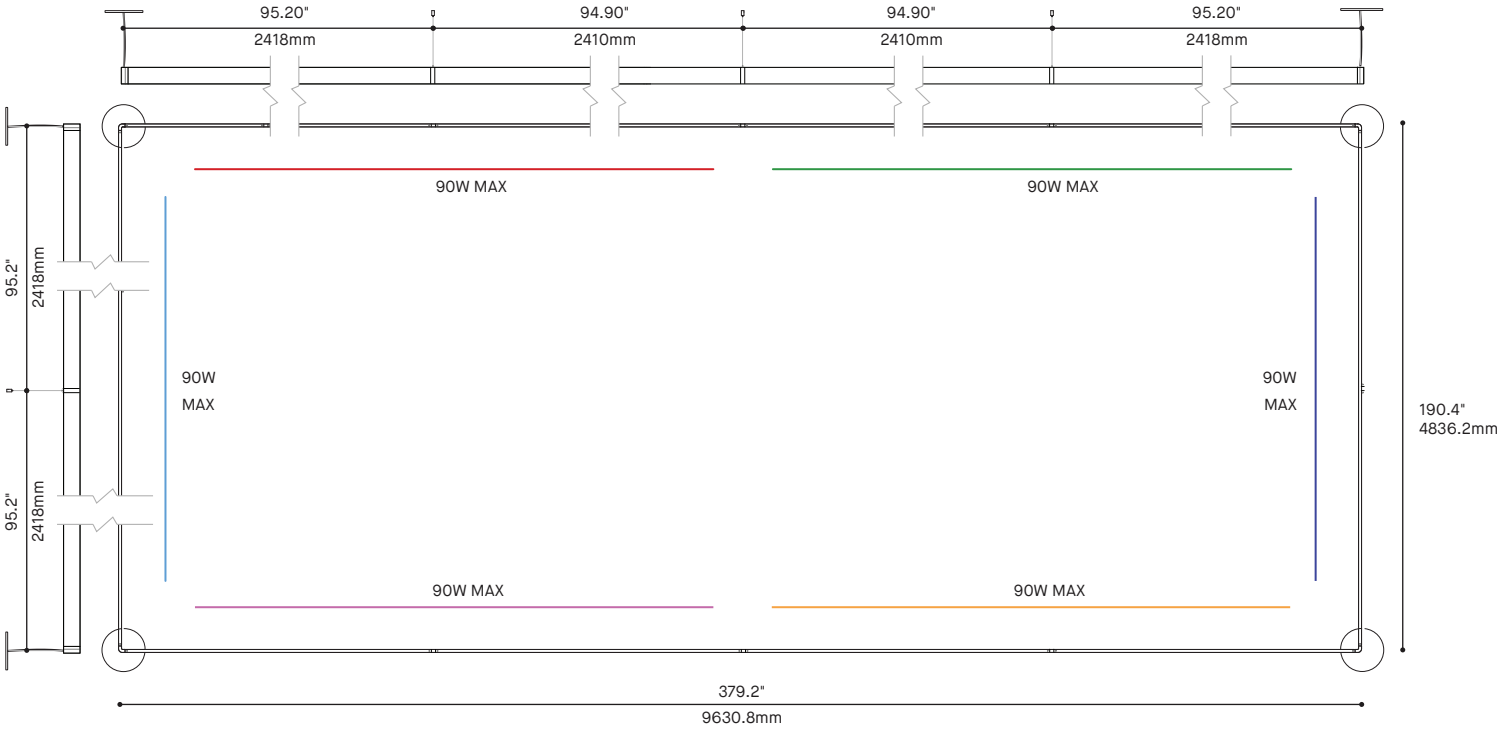
8220-190X380
ARENA RECTANGLE 190" x 380"