



EXPO 74545

PROJECT PROJÉT
SPEC TYPE
NOTES

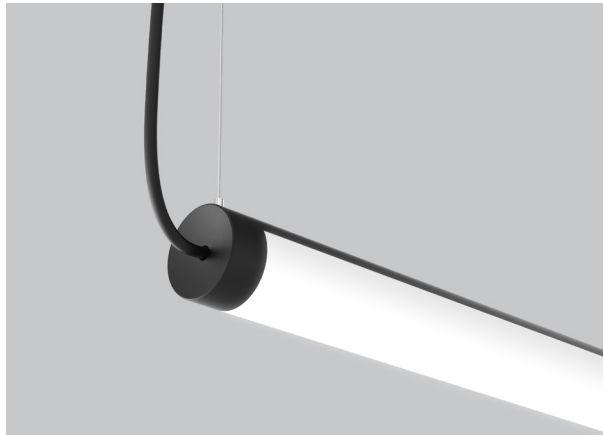


FINISH FINI





BLKE WHE

FAMILY FAMILLE

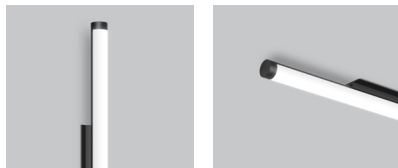


3545 (WALL) 3545 (CEILING)


MOUNTING OPTIONS OPTIONS DE MONTAGE

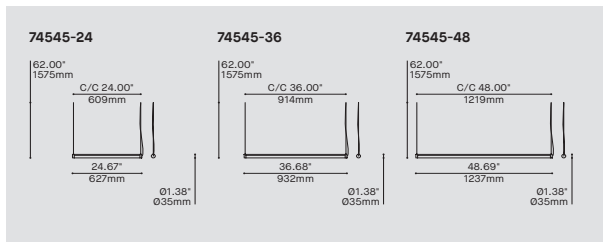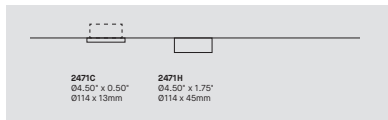


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
74545-24	EXPO 24"	
74545-36	EXPO 36"	
74545-48	EXPO 48"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED.LO	LOW OUTPUT	
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
LED.SHO	SUPER HIGH OUTPUT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
* NOT AVAILABLE WITH 74545-24 LOW, 74545-24 REG, 74545-36 LOW * REQUIRES RC3 CANOPY, REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.		
EMERGENCY BATTERY BATTERIE D'URGENCE		
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.		
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
* 3981EA ACCESSORY IS REQUIRED		
CABLE CÂBLE		AC
AC*	AIRCRAFT MOUNTING AND WHITE OR BLACK CABLE, FIELD ADJUSTABLE	
* FOR WHITE STRUCTURE FINISH: WHITE CABLE, FOR BLACK STRUCTURE FINISH: BLACK CABLE		
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
MOUNTING MONTAGE		
RC1	ROUND CANOPY / PAVILLON ROND	
RC2*	SCREWLESS 1.75" CANOPY (2471H)	
RC3	SCREWLESS 0.5" CANOPY (2471C)	
* 3983 ACCESSORY PROVIDED FOR 2471C CANOPY * RC2 NOT AVAILABLE FOR 74545-24 LOW (DV) AND 74545-24 REGULAR (DV) OUTPUT		
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
STRUCTURE FINISH FINI STRUCTURE		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
RAL*	PLEASE SPECIFY RAL CODE	
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE		
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3983*	DEEP JUNCTION BOX (PROVIDED FOR 2471C CANOPY)	
* JUNCTION BOX IS AVAILABLE FOR ADVANCE SHIPPING		
EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

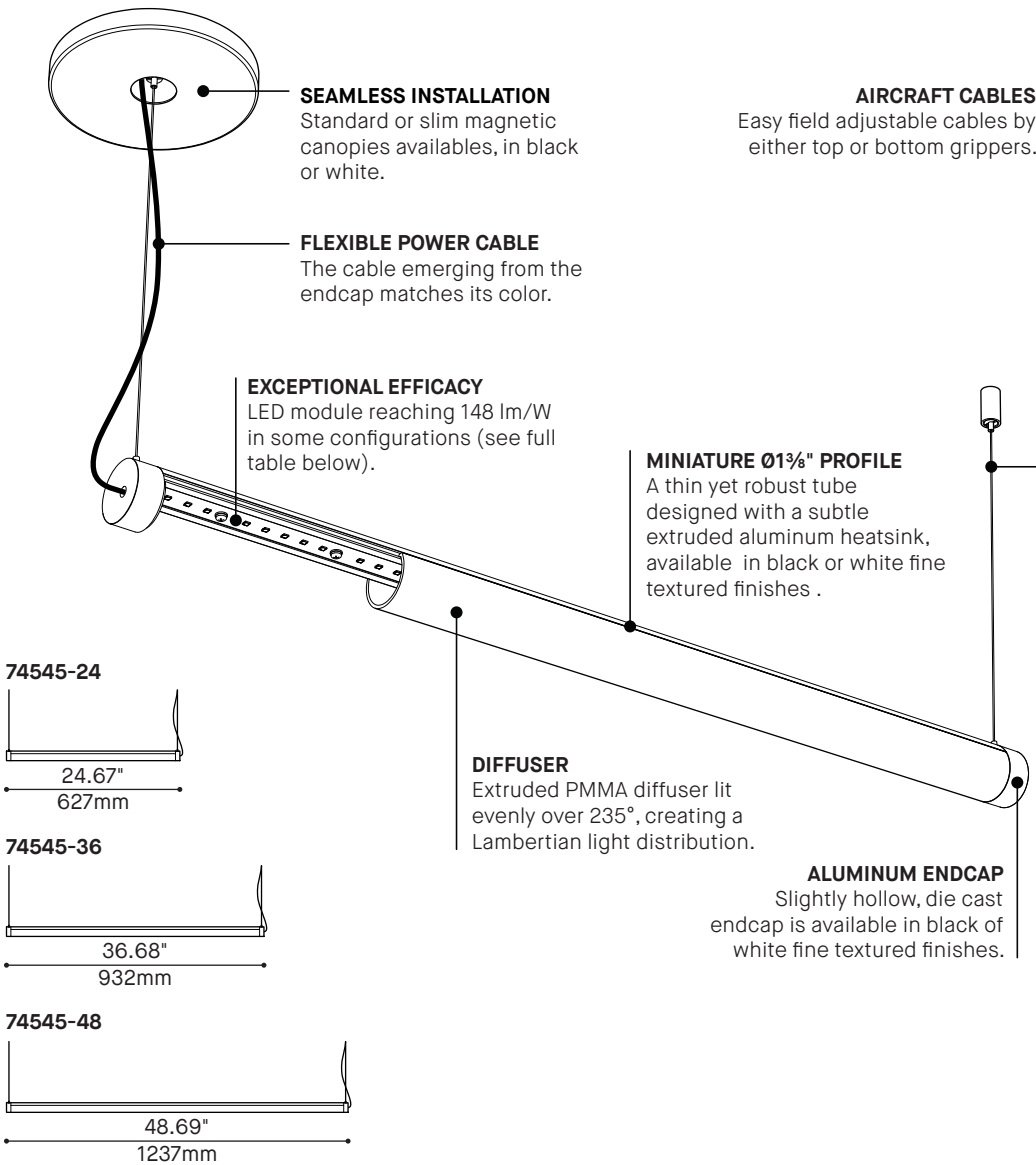

RC1 : STANDARD
Canopy 2471H (Ø4.5" x 1.75")

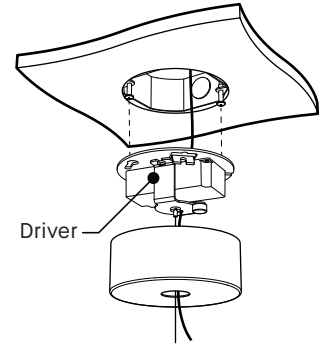

RC2 : SLIM
Canopy 2471C (Ø4.5" x 0.5")

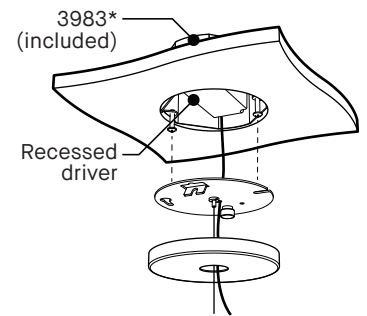


*Deep junction box designed to replace your existing junction box.

PRODUCT SPECIFICATION	74545-24 LOW — REG — HO — SHO	74545-36 LOW — REG — HO — SHO	74545-48 LOW — REG — HO — SHO
PERFORMANCE			
SYSTEM WATTAGE	4,7 W — 9,1 W — 14,2 W — 18,8 W	6,7 W — 13,7 W — 20,2 W — 25,7 W	9,4 W — 17,6 W — 28,5 W — 37,7 W
DELIVERED LUMENS (4000K - WHE)	696 LM — 1214 LM — 1901 LM — 2411 LM	1002 LM — 1928 LM — 2721 LM — 3338 LM	1391 LM — 2481 LM — 3801 LM — 4822 LM
DELIVERED LUMENS/FEET (4000K - WHE)	364 LM/FT — 636 LM/FT — 996 LM/FT — 1263 LM/FT	344 LM/FT — 663 LM/FT — 936 LM/FT — 1148 LM/FT	356 LM/FT — 635 LM/FT — 973 LM/FT — 1234 LM/FT
EFFICACY	143 LM/W — 133 LM/W — 133 LM/W — 128 LM/W	148 LM/W — 141 LM/W — 134 LM/W — 130 LM/W	148 LM/W — 141 LM/W — 133 LM/W — 128 LM/W
OTHER INFORMATION			
LUMINAIRE'S WEIGHT	2,2 LBS / 1 KG	2,75 LBS / 1,25 KG	3,3 LBS / 1,5 KG

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION




74545




Visit our website for warranty terms and conditions.




TECHNICAL DATA

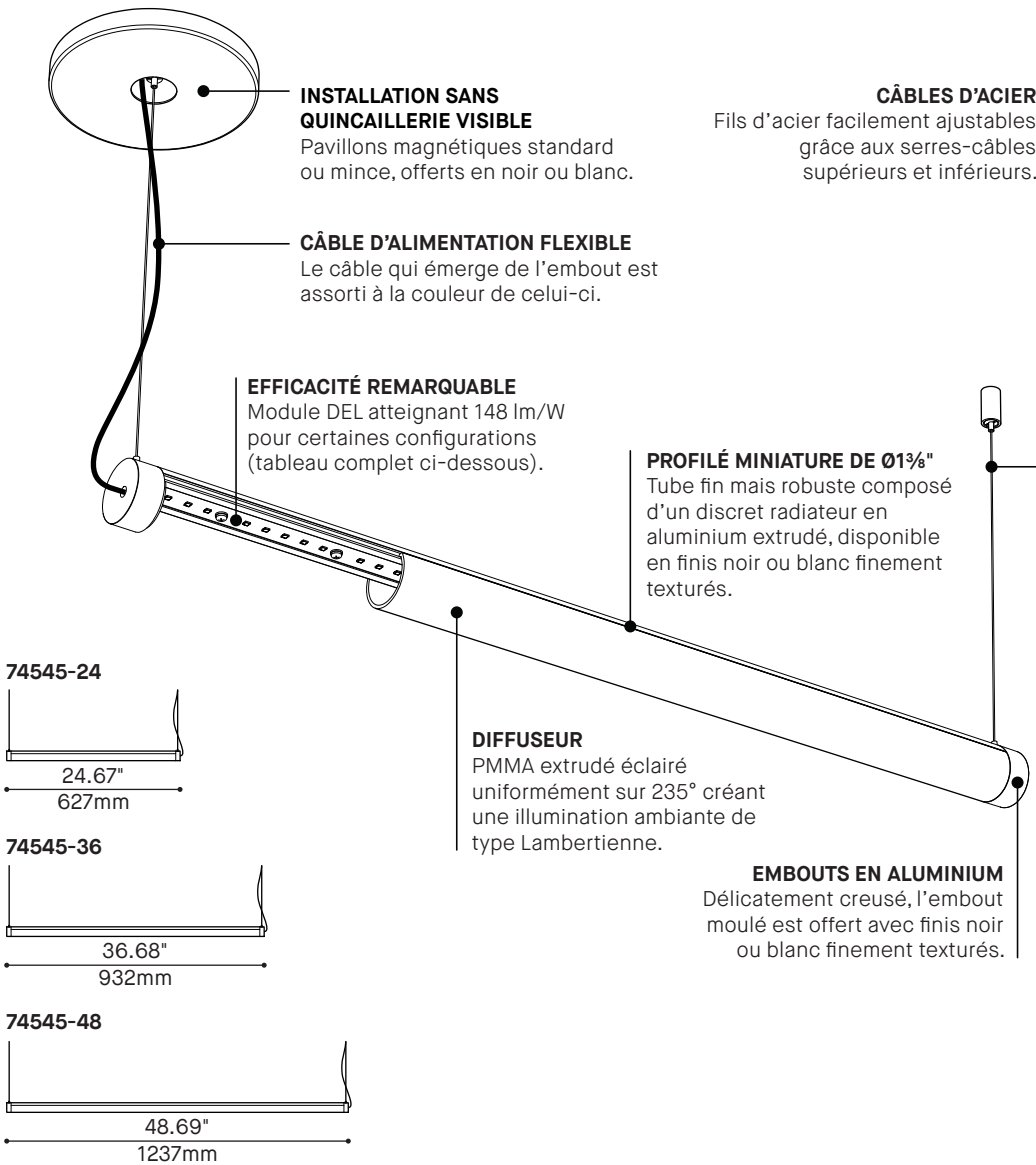


74545-24



74545-36

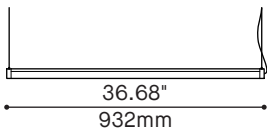


74545-48

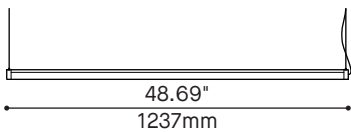


RC1 : STANDARD

Pavillon 2471H (Ø4.5" x 1.75")

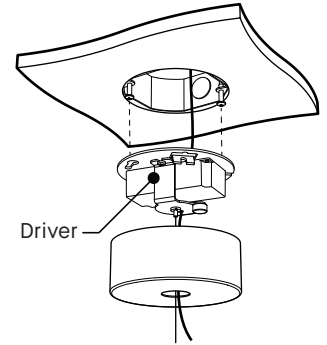

RC2 : MINCE

Pavillon 2471C (Ø4.5" x 0.5")

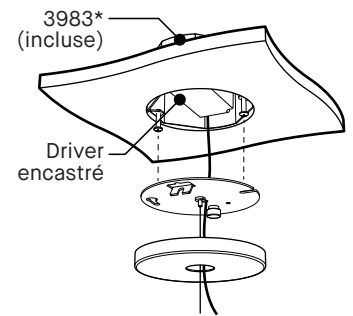

*Boîte de jonction profonde conçue pour remplacer votre boîte de jonction existante.

SPÉCIFICATION PRODUIT

74545-24

LOW — REG — HO — SHO

74545-36

LOW — REG — HO — SHO

74545-48

LOW — REG — HO — SHO

PERFORMANCE

PUISSANCE TOTALE	4,7 W — 9,1 W — 14,2 W — 18,8 W
LUMENS RÉELS (4000K - WHE)	696 LM — 1214 LM — 1901 LM — 2411 LM
LUMENS RÉELS/PIED (4000K - WHE)	364 LM/PI — 636 LM/PI — 996 LM/PI — 1263 LM/PI
EFFICACITÉ	143 LM/W — 133 LM/W — 133 LM/W — 128 LM/W

6,7 W — 13,7 W — 20,2 W — 25,7 W
1002 LM — 1928 LM — 2721 LM — 3338 LM
344 LM/PI — 663 LM/PI — 936 LM/PI — 1148 LM/PI
148 LM/W — 141 LM/W — 134 LM/W — 130 LM/W

9,4 W — 17,6 W — 28,5 W — 37,7 W
1391 LM — 2481 LM — 3801 LM — 4822 LM
356 LM/PI — 635 LM/PI — 973 LM/PI — 1234 LM/PI
148 LM/W — 141 LM/W — 133 LM/W — 128 LM/W


AUTRES INFORMATION

POIDS	2,2 LBS / 1 KG	2,75 LBS / 1,25 KG	3,3 LBS / 1,5 KG
--------------	----------------	--------------------	------------------

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE



74545



Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES