

FRANK 4276


PROJECTPROJET

SPEC TYPE


NOTES



MOUNTING OPTIONS OPTIONS DE MONTAGE

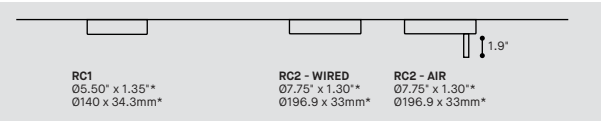


CABLE FINISH FINI CÂBLE

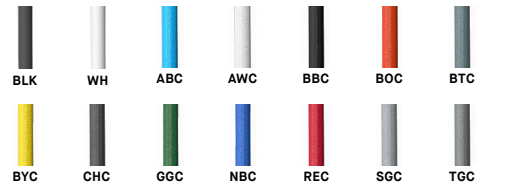

FELT FINISH FINI FEUTRE



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

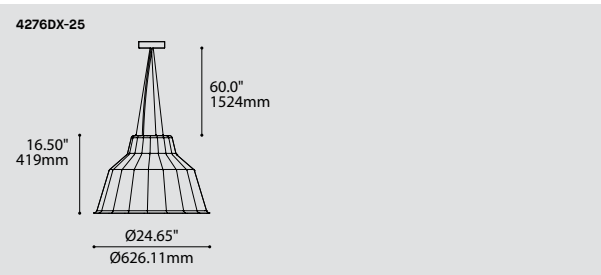


ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL MODÈLE					
4276D-25	FRANK 25" (DIRECT)				
4276DI*-25	FRANK 25" (DIRECT & INDIRECT) *DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY				
LIGHT SOURCE SOURCE LUMINEUSE					
(WATTAGE, LAMP TYPE, OTHER INFO)					
4276D-25					
LED.REG	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4276DI-25					
LED.C1	REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.C2	REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.C3	HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.C4	HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27	2700K				
30	3000K				
35	3500K				
40*	4000K * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL * DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS * REQUIRES RC2 CANOPY REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.				
EMERGENCY BATTERY BATTERIE D'URGENCE					
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX *3981EA ACCESSORY IS REQUIRED FOR THIS OPTION				
CABLE CABLE					
AC	AIRCRAFT MOUNTING AND BLACK OR WHITE CABLE, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.				
MOUNTING MONTAGE					
	ROUND CANOPY / PAVILLON ROND				
RC1	SCREWLESS 1.35" CANOPY (2473F)				
RC2	NLIGHT SCREWLESS 1.75" CANOPY (2474H)				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
RAL	PLEASE SPECIFY RAL CODE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
POWER CABLE FINISH FINI CÂBLE ALIMENTATION					
BLK	BLACK VINYL	BOC*	BLOOD ORANGE	NBC*	NAVY BLUE
WH	WHITE VINYL	BTC*	BATTLESHIP GRAY	REC*	RED
ABC*	AZURE BLUE	BYC*	BANANA YELLOW	SGC*	SILVER GRAY
AWC*	ARCTIC WHITE	CHC*	CHARCOAL	TGC*	TITANIUM GRAY
BBC*	BASIC BLACK	GGC*	GRASS GREEN		
* TEXTILE BRAIDED CORD, ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	CHF	CHARCOAL FELT	REF	RED FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	SGF	SILVER GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	TGF	TITANIUM GRAY FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT	ZFF	ZINFANDEL FELT
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE * LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
DIFFUSER FINISH FINI DIFFUSEUR					
WH	WHITE				
ACCESSORY EMERGENCY BATTERY ACCESSOIRE BATTERIE D'URGENCE					
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				





Cable Color Options for Frank

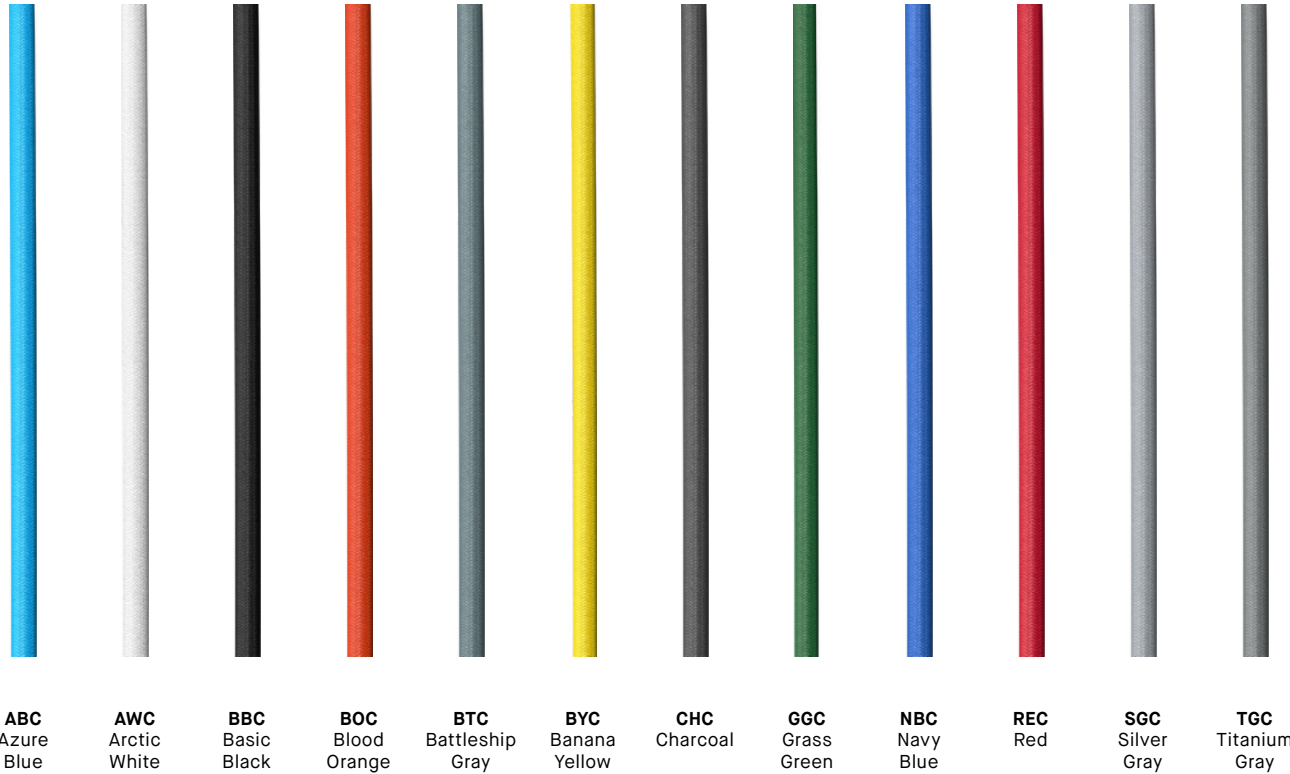

The cable has a Ø0.265in (direct) or Ø0.375in (direct+indirect) and is covered with a decorative braided sleeve.


- Longer lead time may apply.
- Colors shown for visual reference only.
- Due to the dye process, colors may vary slightly from batch to batch.
- Consult your sales representative or factory to get a sample.

Acoustic Material Color Options for Frank

Standard colors




ABF
Azure Blue



BBF
Basic Black




BOF
Blood Orange




BTF
Battleship Gray



CHF
Charcoal




NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BKF
Bark Brown



DBF
Denim Blue




DTF
Deep Teal Green



GGF
Green Grass




LGF
Lime Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple




TPF
Tulip Purple

— Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
— Due to the dye process, colors may vary slightly from batch to batch.

FRANK 4276D-25 / 4276DI-25


COLORED CABLE OPTION
Choose a vibrant color textile power cable to match with the shade color or a traditional vinyl black or white cable.



4276D / 4276DI
Ø0.265in / Ø0.375in

3 CABLES SUSPENSION
Easy installation and adjustment

VERSATILE ENGINES
Regular and high output light engine allows for a wide range of applications



— 4276D DIRECT

ELEGANT LIGHT
Rounded diffuser creates a charming illumination

STRUCTURAL DETAIL
Added lip reinforces the PET shell for extra strength

— 4276DI DIRECT INDIRECT

TRUE UPLIGHT
4276DI uses a second COB that can be controlled independently to offer great uplight performance
Minimum suspension height of 22"


GEOMETRIC SHADE
Thermoformed recycled PET shell offers a refined angular look and showcases the warmth of the material.
Available in 22 colors.



CLASS A FIRE RATING
ASTM E84-17 STANDARD



NOISE REDUCTION
The shade of this pendant is made from a noise absorbing material that increases acoustic comfort.

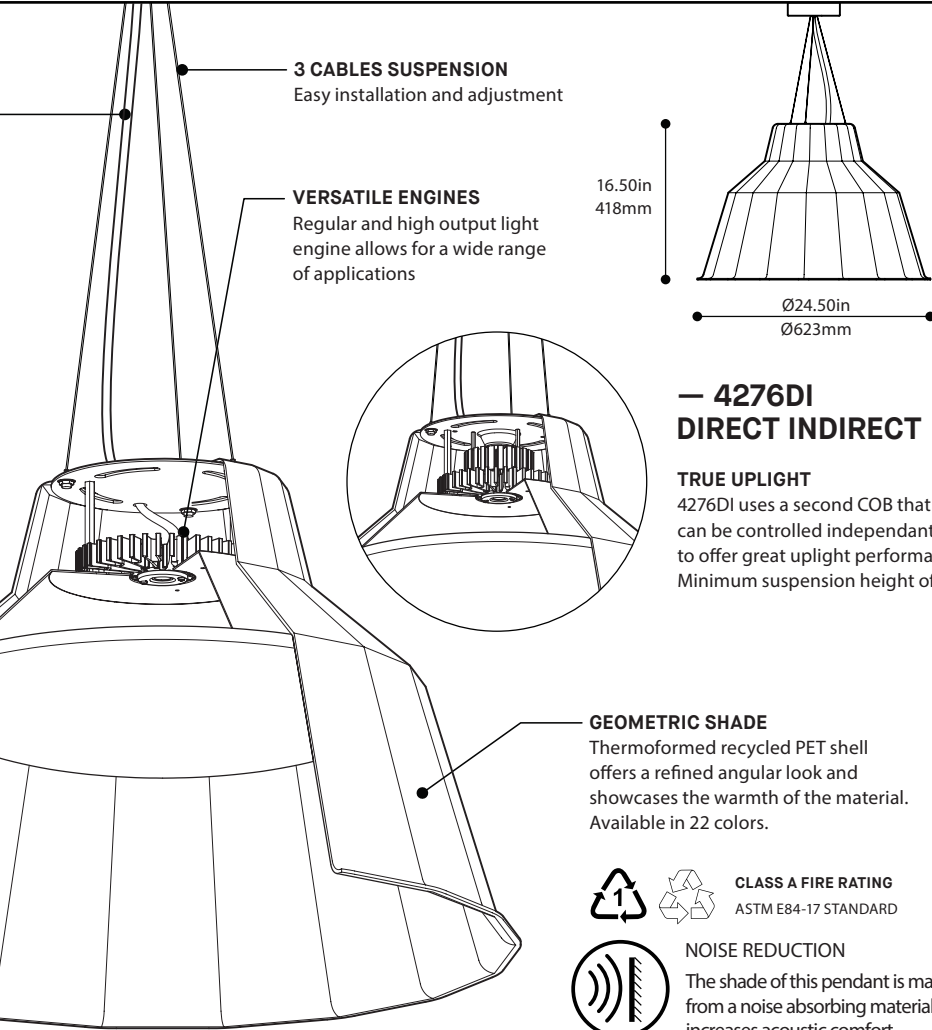

16.50in
418mm


Ø24.50in
Ø623mm

PRODUCT SPECIFICATION	4276D-25-REG	4276D-25-HO	4276DI-25-LED.C1	4276DI-25-LED.C2	4276DI-25-LED.C3	4276DI-25-LED.C4
PERFORMANCE						
SYSTEM WATTAGE	30.5W	46.7W	45.1W	50.6W	61.3W	66.8W
DELIVERED LUMENS DIRECT (4000K)*	1915 LM	2939 LM	1915 LM	1915 LM	2939 LM	2939 LM
DELIVERED LUMENS INDIRECT(4000K)			1261 LM	1862 LM	1261 LM	1862 LM
*EXPECT A 15% DECREASE IN PERFORMANCE FOR CHARCOAL FELT VERSION.						
OTHER INFORMATIONS						
WEIGHT	7.4 LS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG	8.5 LBS / 3.9 KG	9.0 LBS / 4.2 KG	9.0 LBS / 4.2 KG
L70 (LUMEN MAINTENANCE) DIRECT	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS	> 63 600 HRS
L70 (LUMEN MAINTENANCE) INDIRECT	N/A	N/A	> 55 000 HRS	> 55 000 HRS	> 55 000 HRS	> 55 000 HRS
ACOUSTIC PERFORMANCE	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING
FIRE RATING	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17
MAX. LUMINANCE 45°-90° OF NADIR	1828 CD/M²	2828 CD/M²	1828 CD/M²	1828 CD/M²	2828 CD/M²	2828 CD/M²
LIGHT QUALITY	R9 > 50 (90 CRI OPTION)					

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

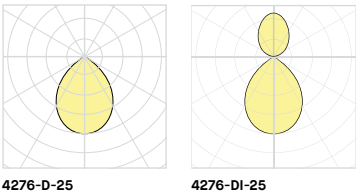

Visit our website for warranty terms and conditions.

FRANK 4276D-25 / 4276DI-25

SUSPENSION 3 CÂBLES
Installation et ajustement facile

CÂBLE DE COULEUR EN OPTION
Choisissez entre un câble en textile de couleur vibrante pour correspondre avec l'abat-jour ou un câble traditionnel en vinyl

SOURCES POLYVALENTES
Source HO et REG permettant une grande variété d'applications

— 4276D DIRECT

LUMIÈRE ÉLÉGANTE
Diffuseur arrondi permettant une diffusion unie sans quincaillerie visible

DÉTAIL STRUCTUREL
Une bordure structurale ajoute de la rigidité à l'abat-jour

— 4276DI DIRECT INDIRECT

SOURCE INDIRECTE PUISSANTE
4276DI utilise un second COB qui peut être contrôlé indépendamment pour offrir un éclairage indirect performant. Suspension minimum de 22"


FORMES GÉOMÉTRIQUES
Coquille de PET recyclée thermoformée donnant un look défini au luminaire et met en valeur l'aspect chaleureux du matériau Disponible en 22 couleurs

CLASS A FIRE RATING
ASTM E84-17 STANDARD

RÉDUCTION DE BRUIT
L'abat-jour de ce luminaire est créé à partir d'un matériau acoustique qui améliore le confort sonore.

SPÉCIFICATION PRODUIT	4276D-25-REG	4276D-25-HO	4276DI-25-LED.C1	4276DI-25-LED.C2	4276DI-25-LED.C3	4276DI-25-LED.C4
PERFORMANCE						
PUISSANCE TOTALE	30.5W	46.7W	45.1W	50.6W	61.3W	66.8W
LUMENS RÉELS DIRECT (4000K)*	1914 LM	2943LM	1914 LM	1914 LM	2943 LM	2943 LM
LUMENS RÉELS INDIRECT (4000K)			1261 LM	1862 LM	1261 LM	1862 LM
*PRÉVOYEZ UNE BAISSSE DE PERFORMANCE DE 15% POUR LA VERSION CHARCOAL FELT.						
AUTRES INFORMATIONS						
POIDS	7.4 LBS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG	8.5 LBS / 3.9 KG	9.0 LBS / 4.2 KG	9.0 LBS / 4.2 KG
L70 (MAINTENANCE DE LA LUMIÈRE) DIRECT	> 63 600 H	> 63 600 H	> 63 600 H	> 63 600 H	> 63 600 H	> 63 600 H
L70 (MAINTENANCE DE LA LUMIÈRE) INDIRECT	N/A	N/A	> 55 000 H	> 55 000 H	> 55 000 H	> 55 000 H
PERFORMANCE ACCOUSTIQUE	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS
FIRE RATING	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17	CLASS A - ASTM E84-17
MAX. LUMINANCE 45°-90° NADIR	1828 CD/M²	2828 CD/M²	1828 CD/M²	1828 CD/M²	2828 CD/M²	2828 CD/M²
QUALITÉ DE LA LUMIERE	R9 > 50 (OPTION 90 IRC)					

FACTEUR D'EFFICACITÉ		
IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

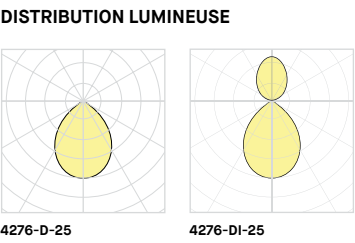

5 ans de garantie

Visitez notre site Web pour les termes et conditions.