
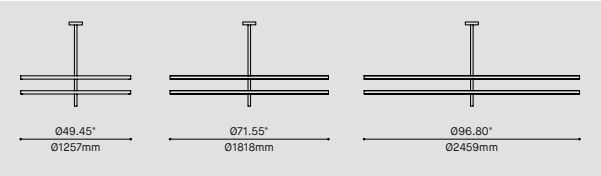


JUNCTION 74710


PROJECTPROJET

SPEC TYPE

NOTES

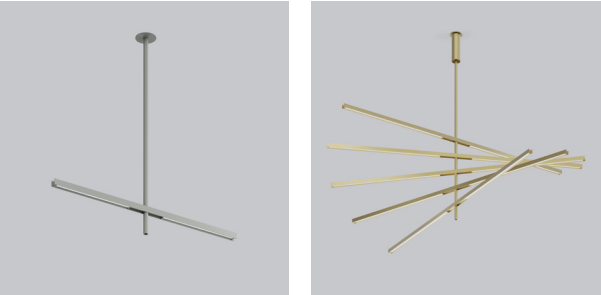

MOUNTING OPTIONS OPTIONS DE MONTAGE

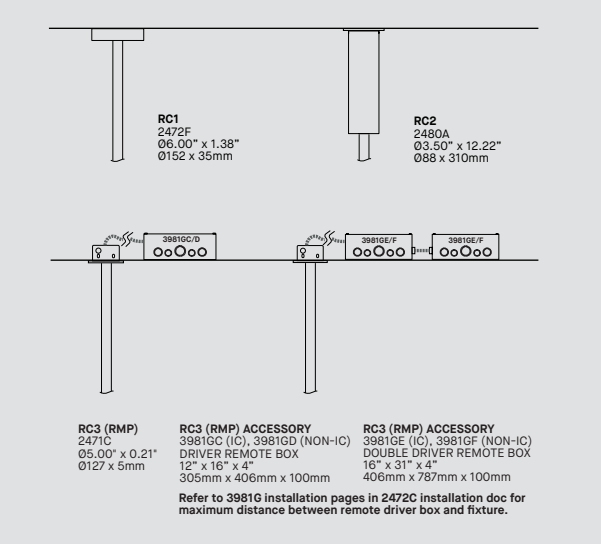

ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE		CODE
MODEL MODÈLE		
74710D	JUNCTION - DIRECT	
74710DI	JUNCTION - DIRECT & INDIRECT	
ARM QUANTITY QUANTITÉ DE BRAS		
1	1 ARM	
2	2 ARMS	
3	3 ARMS	
4	4 ARMS	
5	5 ARMS	
ARMS LENGTH LONGUEUR DES BRAS		
48	48"	
72	72"	
96	96"	
LIGHT SOURCE SOURCE LUMINEUSE		
LED.LO	LOW OUTPUT	
LED	REGULAR OUTPUT	
LED.HO*	HIGH OUTPUT	
	* NOT AVAILABLE FOR 74710DI-5-72 AND 74710DI-5-96	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27	2700K	
30	3000K	
35	3500K	
40*	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90
90	90+ CRI	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DP*	PHASE DIMMING (120V ONLY)	
DV	0-10V DIMMING (120V-277V)	
NLTAIR2**	NLIGHT AIR CONTROL GEN 2	
NLIGHT**	NLIGHT WIRED CONTROL	
	* CONSULT CANOPY COMPATIBILITY CHART AT THE END OF DOC. FOR AVAILABILITY	
	** NLIGHT INTEGRATION REQUIRES THE USAGE OF A REMOTE POWER PACK ACC. (39NLWA OR 39NLAA)	
	** ONLY NLIGHT WIRED IS COMPATIBLE WITH RC3	
	LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
	REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS	
STEM TIGE		S
S	STEM, NOT FIELD ADJUSTABLE	
STARTER STEM LENGTH (FROM CANOPY) LONGUEUR DE TIGE DU DÉBUT (À PARTIR DU PAVILLON)		
12	12" STEM	
24	24" STEM	
36	36" STEM	
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
	STARTER CUSTOM STEM LENGTH POSSIBLE UP TO 96". LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MIDDLE AND END STEM LENGTH LONGUEUR DE TIGE DU MILIEU ET DE FIN		
6	6" STEM	
12	12" STEM	
	ALL MIDDLE AND END STEMS WILL BE THE SAME HEIGHT	
	FOR OVERALL LENGTH PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.	
MOUNTING MONTAGE		
CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY		
RC1	SCREWLESS CANOPY 06.00" X 1.38" (2472F)	
RC2	CYLINDRICAL CANOPY 03.50" X 12.22" (2480A)	
RC3*	REMOTE DRIVER OPTION FLUSH SCREWLESS CANOPY 05.00" X 0.21" (2471C)	
	*REQUIRES ACCESSORY 3981GX. FOR VERSION SEE CANOPY COMPATIBILITY CHART AT THE END OF DOC.	
FINISH FINI		
BLKE	BLACK	CBE* CHOCOLATE BROWN
WHE	WHITE	CPE* CLAY PINK
CHM*	CHAMPAGNE METALLIC	DBE* DYNAMIC BLUE
SIM*	SILVER METALLIC	GGE* GRASS GREEN
AYE*	APRICOT YELLOW	HGE* HUNTER GREEN
BRE*	BRICK RED	LNE* LUNAR GREY
		NBE* NAVY BLUE
		SBE* SAND BEIGE
		SGE* SAGE GREY
		STE* SUMMER TEAL
RAL**	PLEASE SPECIFY RAL CODE	
	COLOR OF STEM AND CANOPY IS THE SAME AS THE LUMINAIRE FINISH	
	ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
	** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	

DIFFUSER FINISH FINI DIFFUSEUR	
FRO	FROST
PRI	PRISMATIC
ACCESSORY ACCESSOIRE	
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING CONSULT CANOPY AVAILABILITY CHART AT THE END OF DOCUMENT FOR COMPATIBILITY	
3981GC	1 DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD1	1 NON-IC 120V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GD2	1 NON-IC 277V ONLY DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"
3981GE	2 DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF1	2 NON-IC 120V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
3981GF2	2 NON-IC 277V ONLY DRIVER BOXES FOR REMOTE INSTALLATION - 4" X 31" X 16"
39NLAA	NLIGHT AIR GEN 2 REMOTE CONTROLLER
39NLWA	NLIGHT WIRED REMOTE CONTROLLER

TOTAL LUMINAIRE HEIGHT CALCULATOR

Canopy		
RC1	RC2	RC3
+ 0.46"	+10.47"	-0.85"

+

First stem length
(12" , 24" , 36" or custom)

+

(Qty of arms) X 0.69"

+


(Qty of arms) X (middle/end stem
length (6" or 12"))

JUNCTION 74710 - FINISH OPTIONS / OPTIONS DE FINIS

Standard



BLKE
Black Textured



WHE
White Textured

Metallic



CHM
Champagne



SIM
Silver


Premium



AYE
Apricot
Yellow
Textured



BRE
Brick Red
Textured



CBE
Chocolate
Brown
Textured



CPE
Clay Pink
Textured




DBE
Dynamic Blue
Textured



GGE
Grass Green
Textured



HGE
Hunter Green
Textured



LNE
Lunar Gray
Textured



NBE
Navy Blue
Textured



SBE
Sand Beige
Textured




SGE
Sage Gray
Textured




STE
Summer Teal
Textured

JUNCTION 74710

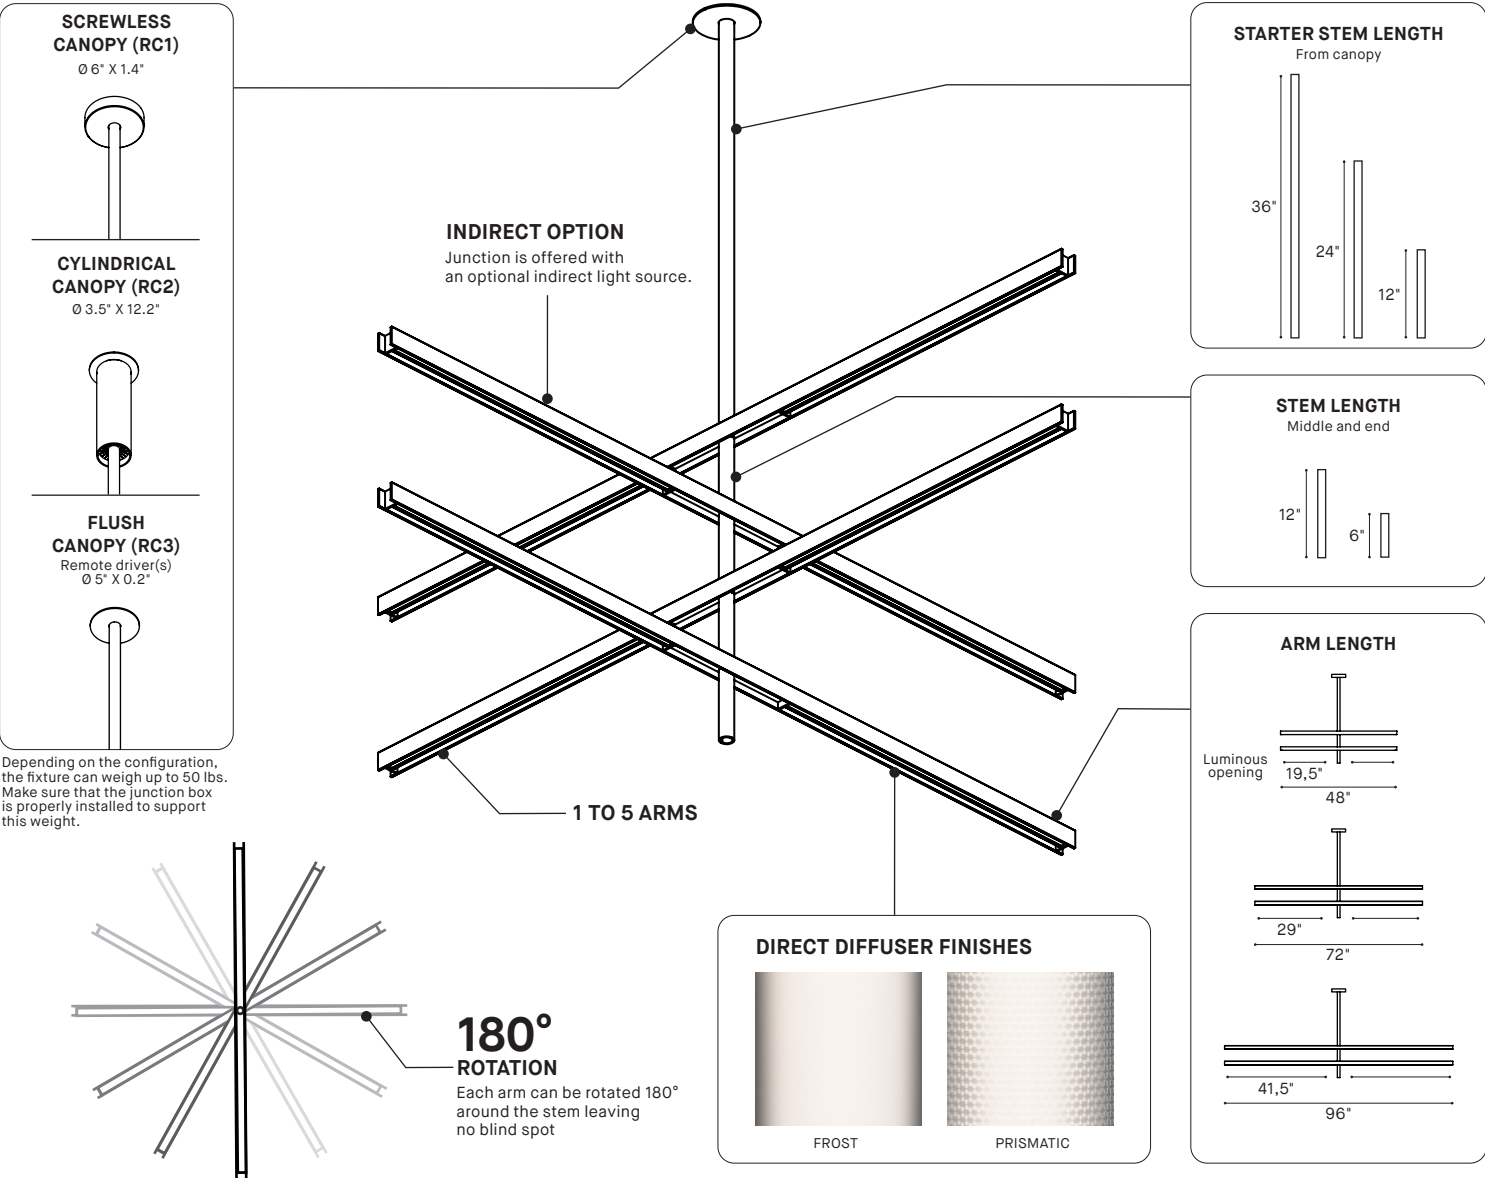

PRODUCT SPECIFICATION	48" DIRECT (PER ARM)	72" DIRECT (PER ARM)	96" DIRECT (PER ARM)	48" INDIRECT (PER ARM)	72" INDIRECT (PER ARM)	96" INDIRECT (PER ARM)
PERFORMANCE	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO
SYSTEM WATTAGE	6.0 — 12.3 — 25.6 W	9.0 — 18.5 — 38.4 W	12.0 — 24.5 — 50.9 W	6.0 — 12.3 — 25.6 W	9.1 — 18.6 — 38.8 W	12.0 — 24.6 — 51.2 W
DELIVERED LUMENS (4000K)	576 — 1160 — 2303 LM	864 — 1739 — 3454 LM	1150 — 2319 — 4612 LM	720 — 1450 — 2879 LM	1083 — 2174 — 4307 LM	1441 — 2900 — 5759 LM
EFFICACY	96 — 94 — 90 LM/W	96 — 94 — 90 LM/W	96 — 95 — 91 LM/W	120 — 118 — 112 LM/W	120 — 118 — 112 LM/W	120 — 118 — 112 LM/W
OTHER INFORMATION						
WEIGHT	~ 6.6 LBS / 3 KG	~ 7.7 LBS / 3.5 KG	~ 9 LBS / 4 KG			
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS


EFFICACY MULTIPLIERS		
CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

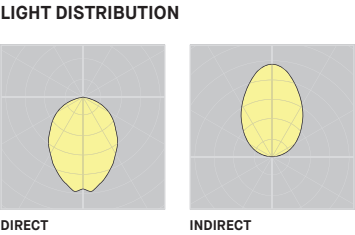


Visit our website for warranty terms and conditions.

JUNCTION 74710


PAVILLON SANS VIS APPARENTE(RC1)
Ø 6" X 1.4"



PAVILLON TUBE (RC2)
Ø 3.5" X 12.2"




PAVILLON PLAT SANS VIS APPARENTE
Unité(s) d'alimentation DEL à distance
Ø 5" X 0.2"



Selon la configuration, le luminaire peut peser jusqu'à 50 livres. Assurez-vous que la boîte de jonction est correctement installée pour supporter ce poids.


OPTION INDIRECTE
Junction est offert avec une source lumineuse indirecte optionnelle.

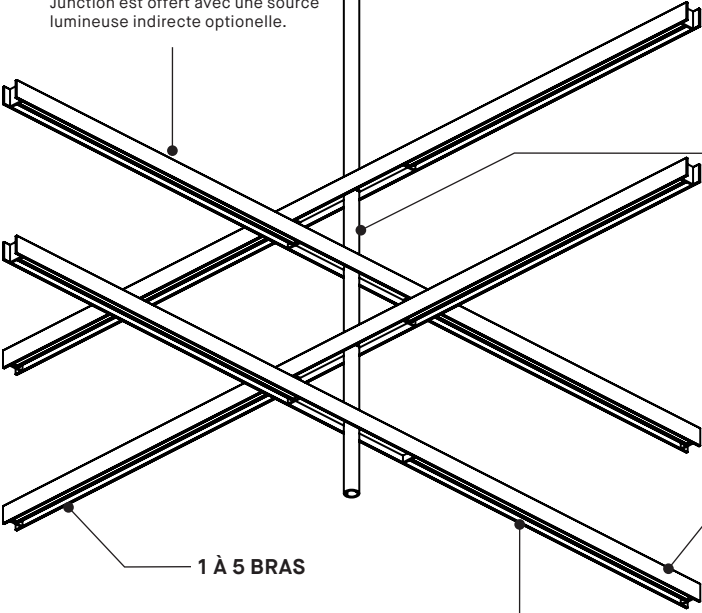


LONGUEUR DE LA TIGE
De départ




LONGUEUR DES TIGES
Du milieu et de la fin




LONGUEUR DES BRAS

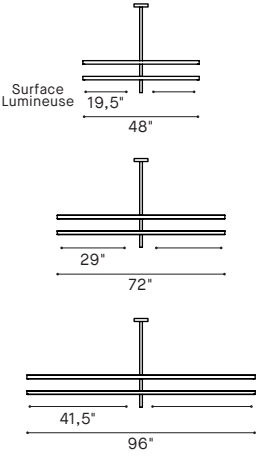

1 À 5 BRAS



180° ROTATION
Chaque bras peut être pivoté sur 180° autour de la tige centrale.



FINI DE DIFFUSEUR DIRECT



FROST




PRISMATIC

SPECIFICATIONS PRODUIT	48" DIRECT (PAR BRAS)	72" DIRECT (PAR BRAS)	96" DIRECT (PAR BRAS)	48" INDIRECT (PAR BRAS)	72" INDIRECT (PAR BRAS)	96" INDIRECT (PAR BRAS)
PERFORMANCE	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO	LO — REG — HO
PUISSANCE TOTALE	6.0 — 12.3 — 25.6 W	9.0 — 18.5 — 38.4 W	12.0 — 24.5 — 50.9 W	6.0 — 12.3 — 25.6 W	9.1 — 18.6 — 38.8 W	12.0 — 24.6 — 51.2 W
LUMENS RÉELS (4000K)	576 — 1160 — 2303 LM	864 — 1739 — 3454 LM	1150 — 2319 — 4612 LM	720 — 1450 — 2879 LM	1083 — 2174 — 4307 LM	1441 — 2900 — 5759 LM
EFFICACITÉ	96 — 94 — 90 LM/W	96 — 94 — 90 LM/W	96 — 95 — 91 LM/W	120 — 118 — 112 LM/W	120 — 118 — 112 LM/W	120 — 118 — 112 LM/W
OTHER INFORMATION						
POIDS	~ 6.6 LBS / 3 KG	~ 7.7 LBS / 3.5 KG	~ 9 LBS / 4 KG			
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE

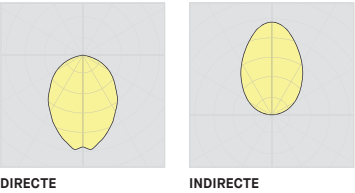



C-SP US



FC



5 ans de garantie

Visitez notre site Web pour les termes et conditions.

JUNCTION 74710




48"

72"

96"




1 ARM / 1 BRAS

6"
END STEM
LENGTH

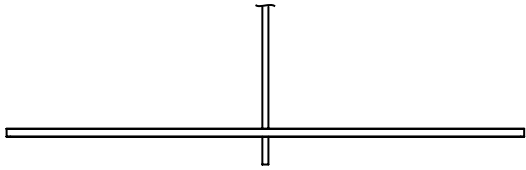
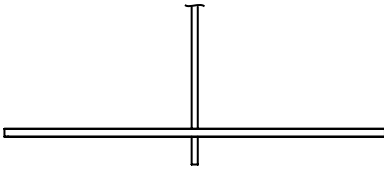



2 ARMS / 2 BRAS

6"
MIDDLE AND END
STEM LENGTH

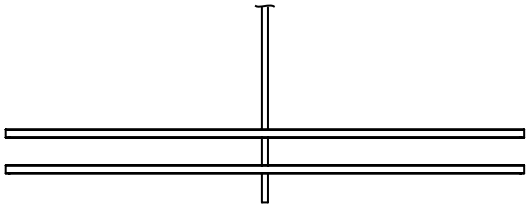
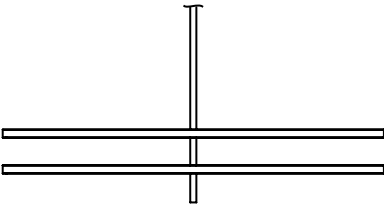



12"
MIDDLE AND END
STEM LENGTH

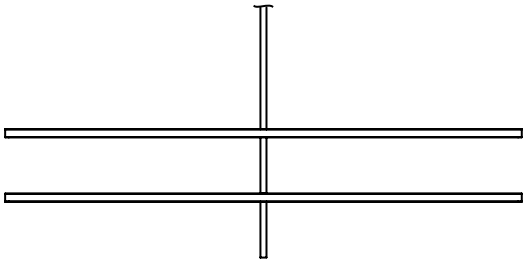
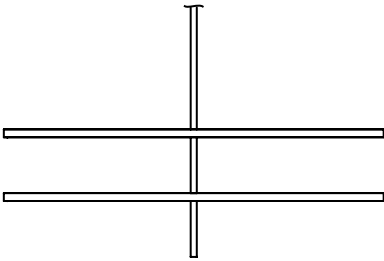



3 ARMS / 3 BRAS

6"
MIDDLE AND END
STEM LENGTH

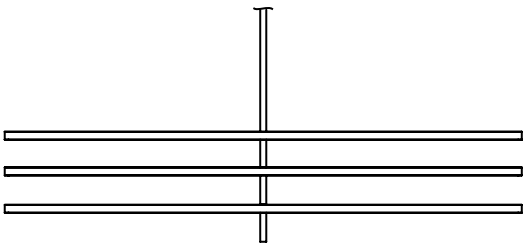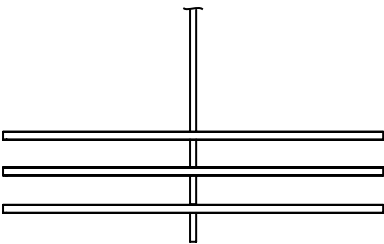

12"
MIDDLE AND END
STEM LENGTH

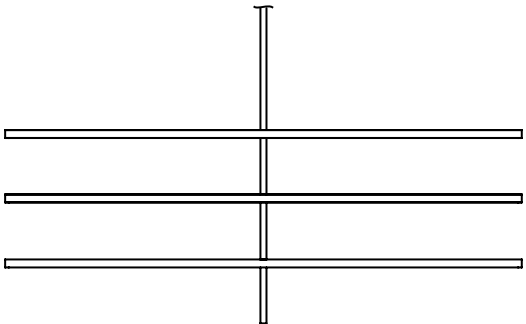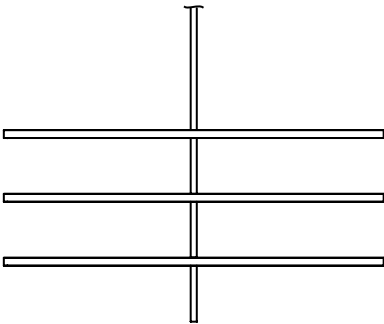

JUNCTION 74710




48"

72"




96"

4 ARMS / 4 BRAS

6"
MIDDLE AND END
STEM LENGTH

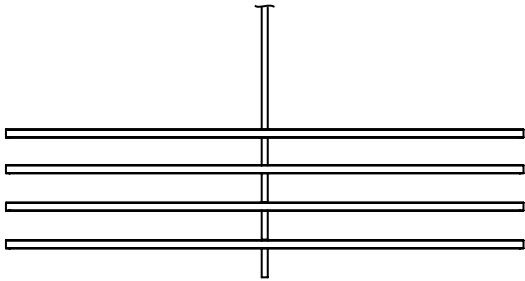
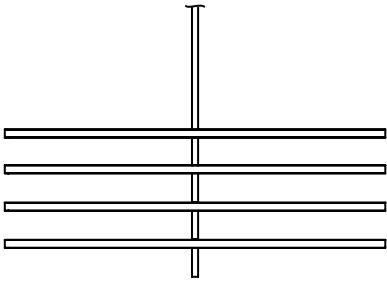



12"
MIDDLE AND END
STEM LENGTH

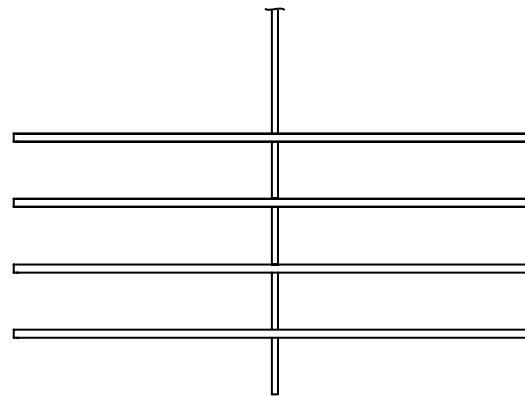
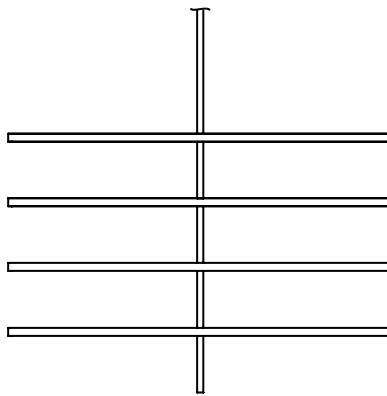
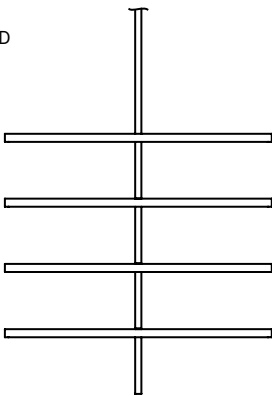


5 ARMS / 5 BRAS





6"
MIDDLE AND END
STEM LENGTH

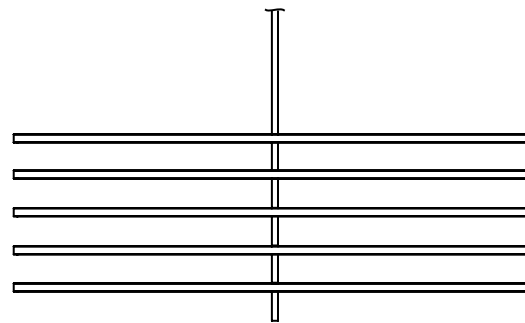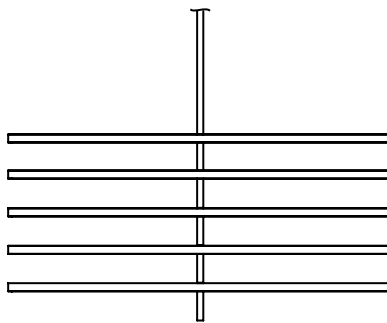





12"
MIDDLE AND END
STEM LENGTH

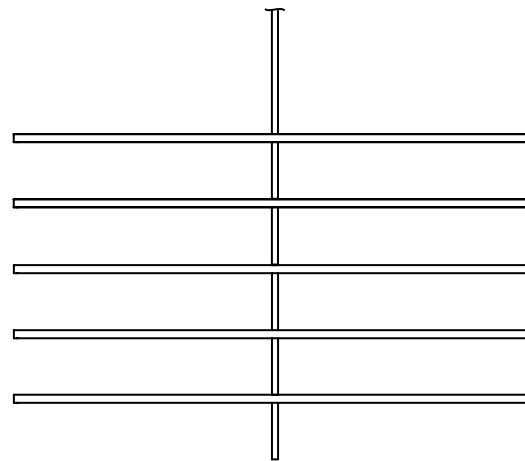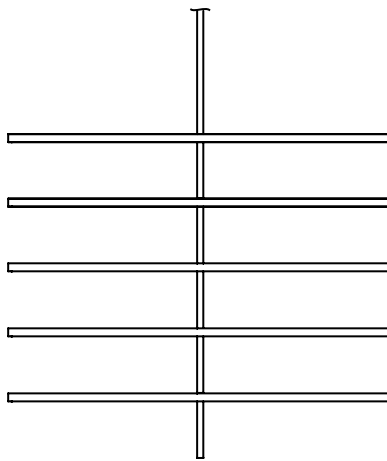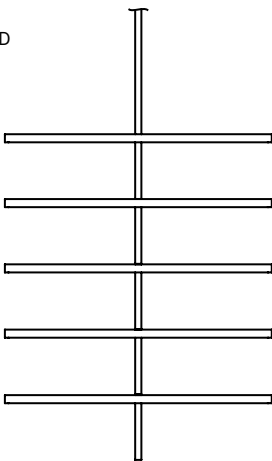





JUNCTION - 74710 - CANOPY COMPATIBILIY CHART

FIXTURE	CANOPY		
	RC1	RC2	RC3
 1 ARM	 SCREWLESS CANO Ø6.00" X 1.38"	 CYLINDRICAL CANO Ø3.50" X 11.80"	 REMOTE DRIVER OPTION FLUSH SCREWLESS CANO
	0-10V + Phase dimming	0-10V + Phase dimming	0-10V dimming only
1 ARM - 48" - D - LOW			3981GC
1 ARM - 48" - D - REG	●	●	3981GC
1 ARM - 48" - D - HO	●	●	3981GC
1 ARM - 48" - DI - LOW	●	●	3981GC
1 ARM - 48" - DI - REG	●	●	3981GC
1 ARM - 48" - DI - HO	●	●	3981GC
1 ARM - 72" - D - LOW	●	●	3981GC
1 ARM - 72" - D - REG	●	●	3981GC
1 ARM - 72" - D - HO	●	●	3981GC
1 ARM - 72" - DI - LOW	●	●	3981GC
1 ARM - 72" - DI - REG	●	●	3981GC
1 ARM - 72" - DI - HO	●	●	3981GC
1 ARM - 96" - D - LOW	●	●	3981GC
1 ARM - 96" - D - REG	●	●	3981GC
1 ARM - 96" - D - HO	●	●	3981GC
1 ARM - 96" - DI - LOW	●	●	3981GC
1 ARM - 96" - DI - REG	●	●	3981GC
1 ARM - 96" - DI - HO	●	●	3981GC





JUNCTION - 74710 - CANOPY COMPATIBILIY CHART

FIXTURE	CANOPY		
	RC1	RC2	RC3
 2 ARMS	 SCREWLESS CANO Ø6.00" X 1.38" 0-10V + Phase dimming	 CYLINDRICAL CANO Ø3.50" X 11.80" 0-10V + Phase dimming	 REMOTE DRIVER OPTION FLUSH SCREWLESS CANO Ø4.50"X 0.50" 0-10V dimming only
2 ARMS - 48" - D - LOW	●	●	3981GC
2 ARMS - 48" - D - REG	●	●	3981GC
2 ARMS - 48" - D - HO	●	●	3981GC
2 ARMS - 48" - DI - LOW	●	●	3981GC
2 ARMS - 48" - DI - REG	●	●	3981GC
2 ARMS - 48" - DI - HO	●	●	3981GC
2 ARMS - 72" - D - LOW	●	●	3981GC
2 ARMS - 72" - D - REG	●	●	3981GC
2 ARMS - 72" - D - HO	●	●	3981GC
2 ARMS - 72" - DI - LOW	●	●	3981GC
2 ARMS - 72" - DI - REG	●	●	3981GC
2 ARMS - 72" - DI - HO		●	3981GC
2 ARMS - 96" - D - LOW	●	●	3981GC
2 ARMS - 96" - D - REG	●	●	3981GC
2 ARMS - 96" - D - HO	●	●	3981GC
2 ARMS - 96" - DI - LOW	●	●	3981GC
2 ARMS - 96" - DI - REG	●	●	3981GC
2 ARMS - 96" - DI - HO		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)





JUNCTION - 74710 - CANOPY COMPATIBILIY CHART

FIXTURE	CANOPY		
 3 ARMS	RC1	RC2	RC3
	 SCREWLESS CANO Ø6.00" X 1.38"	 CYLINDRICAL CANO Ø3.50" X 11.80"	 REMOTE DRIVER OPTION FLUSH SCREWLESS CANO Ø4.50" X 0.50"
	0-10V + Phase dimming	0-10V + Phase dimming	0-10V dimming only
3 ARMS - 48" - D - LOW	●	●	3981GC
3 ARMS - 48" - D - REG	●	●	3981GC
3 ARMS - 48" - D - HO	●	●	3981GC
3 ARMS - 48" - DI - LOW	●	●	3981GC
3 ARMS - 48" - DI - REG	●	●	3981GC
3 ARMS - 48" - DI - HO		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
3 ARMS - 72" - D - LOW	●	●	3981GC
3 ARMS - 72" - D - REG	●	●	3981GC
3 ARMS - 72" - D - HO		●	3981GC
3 ARMS - 72" - DI - LOW	●	●	3981GC
3 ARMS - 72" - DI - REG		●	3981GC
3 ARMS - 72" - DI - HO			IC DOUBLE BOX : 3981GE
3 ARMS - 96" - D - LOW	●	●	3981GC
3 ARMS - 96" - D - REG	●	●	3981GC
3 ARMS - 96" - D - HO		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
3 ARMS - 96" - DI - LOW	●	●	3981GC
3 ARMS - 96" - DI - REG		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
3 ARMS - 96" - DI - HO			NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)

JUNCTION - 74710 - CANOPY COMPATIBILIY CHART

FIXTURE	CANOPY		
	RC1	RC2	RC3
 4 ARMS	 SCREWLESS CANO Ø6.00" X 1.38" 0-10V + Phase dimming	 CYLINDRICAL CANO Ø3.50" X 11.80" 0-10V + Phase dimming	 REMOTE DRIVER OPTION FLUSH SCREWLESS CANO Ø4.50"X 0.50" 0-10V dimming only
4 ARMS - 48" - D - LOW	●	●	3981GC
4 ARMS - 48" - D - REG	●	●	3981GC
4 ARMS - 48" - D - HO	●	●	3981GC
4 ARMS - 48" - DI - LOW	●	●	3981GC
4 ARMS - 48" - DI - REG	●	●	3981GC
4 ARMS - 48" - DI - HO		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
4 ARMS - 72" - D - LOW	●	●	3981GC
4 ARMS - 72" - D - REG	●	●	3981GC
4 ARMS - 72" - D - HO		●	3981GC
4 ARMS - 72" - DI - LOW	●	●	3981GC
4 ARMS - 72" - DI - REG		●	3981GC
4 ARMS - 72" - DI - HO			IC DOUBLE BOX : 3981GE
4 ARMS - 96" - D - LOW	●	●	3981GC
4 ARMS - 96" - D - REG	●	●	3981GC
4 ARMS - 96" - D - HO		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
4 ARMS - 96" - DI - LOW	●	●	3981GC
4 ARMS - 96" - DI - REG		●	NON-IC : 3981GD1 (120V) / 3981GD2 (277V)
4 ARMS - 96" - DI - HO			NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)

JUNCTION - 74710 - CANOPY COMPATIBILIY CHART

FIXTURE	CANOPY		
	RC1	RC2	RC3
 5 ARMS	 SCREWLESS CANO Ø6.00" X 1.38" 0-10V + Phase dimming	 CYLINDRICAL CANO Ø3.50" X 11.80" 0-10V + Phase dimming	 REMOTE DRIVER OPTION FLUSH SCREWLESS CANO Ø4.50"X 0.50" 0-10V dimming only
5 ARMS - 48" - D - LOW	●	●	3981GC
5 ARMS - 48" - D - REG	●	●	3981GC
5 ARMS - 48" - D - HO		●	3981GC
5 ARMS - 48" - DI - LOW	●	●	3981GC
5 ARMS - 48" - DI - REG		●	3981GC
5 ARMS - 48" - DI - HO			NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)
5 ARMS - 72" - D - LOW	●	●	3981GC
5 ARMS - 72" - D - REG		●	3981GC
5 ARMS - 72" - D - HO			IC DOUBLE BOX : 3981GE
5 ARMS - 72" - DI - LOW		●	3991GC
5 ARMS - 72" - DI - REG			IC DOUBLE BOX : 3981GE
5 ARMS - 72" - DI - HO	not offered		
5 ARMS - 96" - D - LOW	●	●	3981GC
5 ARMS - 96" - D - REG		●	3981GC
5 ARMS - 96" - D - HO			NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)
5 ARMS - 96" - DI - LOW		●	3981GC
5 ARMS - 96" - DI - REG			NON-IC DOUBLE BOX 3981GF1 (120V) / 3981GF2 (277V)
5 ARMS - 96" - DI - HO	not offered		