

KNIT 4274


PROJECT PROJÉT

SPEC TYPE


NOTES



MOUNTING OPTIONS OPTIONS DE MONTAGE

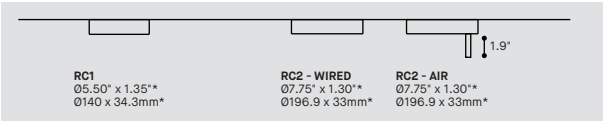


CABLE FINISH FINI CÂBLE

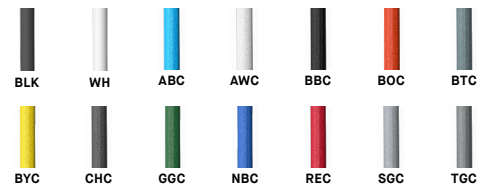

FELT FINISH FINI FEUTRE




ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

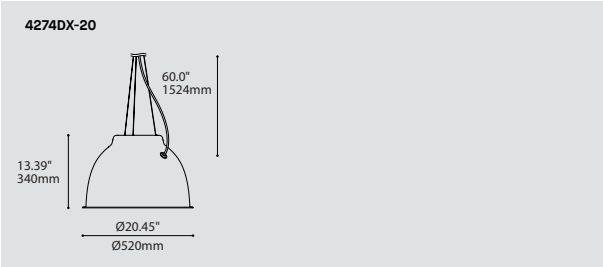

ORDERING SPECIFICATION			SPÉCIFICATION DE COMMANDE			CODE
MODEL		MODÈLE				
4274D-20		KNIT 20" – DIRECT				
4274DI*-20		KNIT 20" – DIRECT INDIRECT				
		*DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY				
LIGHT SOURCE		SOURCE LUMINEUSE				
4274D-20						
LED		REGULAR OUTPUT				
LED.HO		HIGH OUTPUT				
4274DI-20						
LED.C1		REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.C2		REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.C3		HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.C4		HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE		TEMPÉRATURE DE COULEUR				
27*		2700K				
30		3000K				
35		3500K				
40		4000K				
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI)		INDICE DE RENDU DE COULEUR (IRC)				
80		80+ CRI				
90*		90+ CRI				
		* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
VOLTAGE		VOLTAGE				
120V		120 VOLT				
277V		277 VOLT				
CONTROL OPTION		OPTION DE CONTRÔLE				
DV		0-10V DIMMING (120V-277V)				
DP		PHASE DIMMING (120V ONLY)				
NLTAIR2*		NLIGHT AIR CONTROL GEN 2				
NLIGHT*		NLIGHT WIRED CONTROL				
		* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
		* REQUIRES RC2 CANOPY				
EMERGENCY BATTERY		BATTERIE D'URGENCE				
EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.						
EMB*		EMERGENCY BATTERY FOR REMOTE BOX				
		* 3981EA ACCESSORY IS REQUIRED				
CABLE		CÂBLE		AC		
AC		AIRCRAFT MOUNTING & BLACK OR WHITE CABLE, FIELD ADJUSTABLE				
CABLE LENGTH		LONGUEUR DE CÂBLE				
60		60" AIRCRAFT CABLE (STD LENGTH)				
**		CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
		FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING		MONTAGE				
		ROUND CANOPY / PAVILLON ROND				
RC1		SCREWLESS 1.35" CANOPY (2473F)				
RC2		NLIGHT SCREWLESS 1.75" CANOPY (2474H)				
CANOPY FINISH		FINI PAVILLON				
BLKE		BLACK FINE TEXTURE				
WHE		WHITE FINE TEXTURE				
GROMMET FINISH		FINI OEILLET				
BLKE		BLACK FINE TEXTURE				
WHE		WHITE FINE TEXTURE				
POWER CABLE FINISH		FINI CÂBLE ALIMENTATION				
BLK		BLACK VINYL	BOC*	BLOOD ORANGE	NBC*	NAVY BLUE
WH		WHITE VINYL	BTC*	BATTLESHIP GRAY	REC*	RED
ABC*		AZURE BLUE	BYC*	BANANA YELLOW	SGC*	SILVER GRAY
AWC*		ARCTIC WHITE	CHC*	CHARCOAL	TGC*	TITANIUM GRAY
BBC*		BASIC BLACK	GGC*	GRASS GREEN		
* TEXTILE BRAIDED CORD, ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE.						
GROMMET IS WHITE OR BLACK						
SHADE FINISH		FINI ABAT-JOUR				
ABF		AZURE BLUE FELT	CHF	CHARCOAL FELT	REF	RED FELT
BBF		BASIC BLACK FELT	NBF	NAVY BLUE FELT	SGF	SILVER GRAY FELT
BOF		BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	TGF	TITANIUM GRAY FELT
BTF		BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT	ZFF	ZINFANDEL FELT
PREMIUM*		PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE						
DIFFUSER FINISH		FINI DIFFUSEUR		WH		
WH		WHITE				
ACCESSORY		ACCESSOIRE				
3981EA		ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				

Cable Color Options for Knit

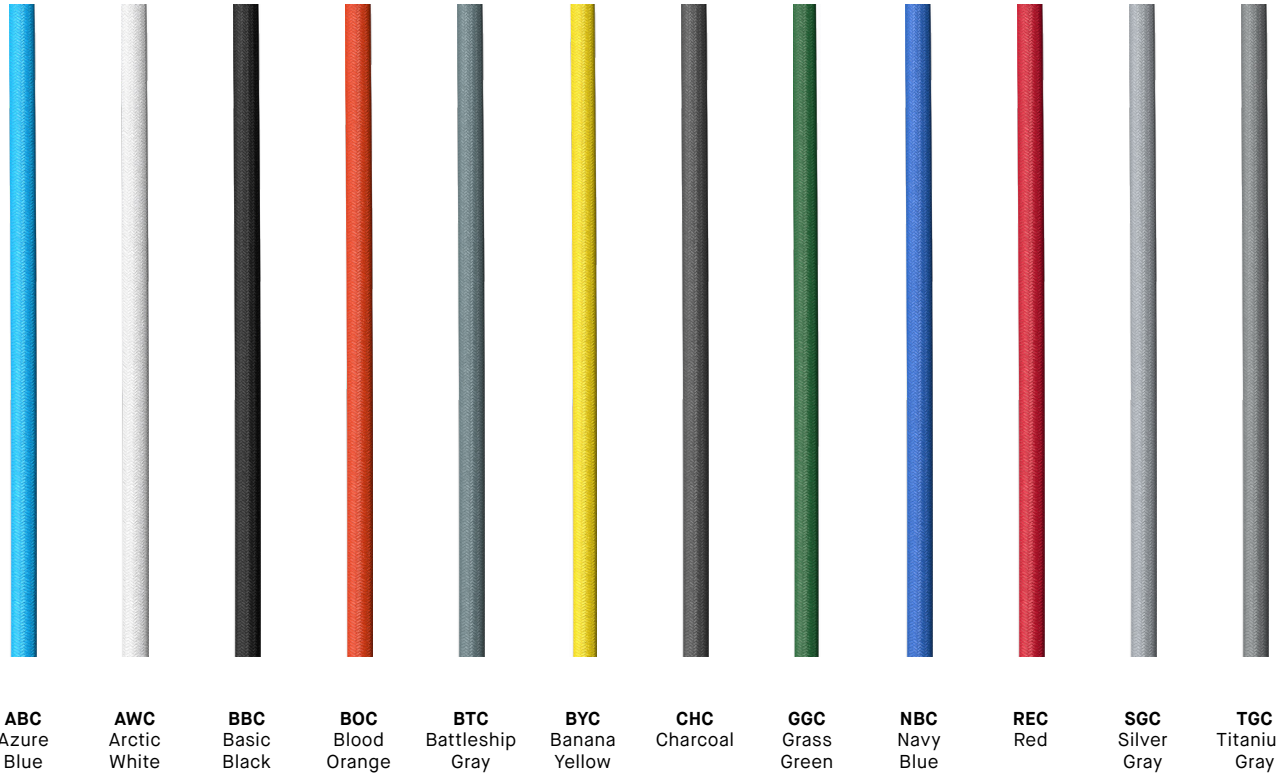

The cable has a Ø0.265in (direct) or Ø0.375in (direct+indirect) and is covered with a decorative braided sleeve.


- Longer lead time may apply.
- Colors shown for visual reference only.
- Due to the dye process, colors may vary slightly from batch to batch.
- Consult your sales representative or factory to get a sample.

Acoustic Material Color Options for Knit

Standard colors




ABF
Azure Blue



BBF
Basic Black




BOF
Blood Orange




BTF
Battleship Gray



CHF
Charcoal




NBF
Navy Blue



OBF
Ocean Blue



PGF
Pear Green




REF
Red



SGF
Silver Gray



TGF
Titanium Gray



ZFF
Zinfandel


Premium colors




BKF
Bark Brown




DBF
Denim Blue




DTF
Deep Teal Green



GGF
Green Grass



LGF
Lime Green




OAF
Oak Brown



PBF
Peanut Brown



PNF
Pinot Noir



PPF
Plum Purple



TPF
Tulip Purple

— Premium colors carry extended lead times. Additional fees may apply for expedited lead times. Please consult factory.
— Due to the dye process, colors may vary slightly from batch to batch.

KNIT 4274D-20 / 4274DI-20

— 4274D
DIRECT

3 CABLE SUSPENSION
Easy installation and adjustment

VERSATILE ENGINES
Regular and high output light engine allows for a wide range of applications

THOUGHTFUL CABLE DETAIL
A design that consciously integrates the power cable to create a distinctive look

SOFT SHAPES
Thermoformed recycled PET shell offers a soft and delicate look and showcases the warmth of the material.

CLASS A FIRE RATING
ASTM E84-17 STANDARD

NOISE REDUCTION
The shade of this pendant is made from a noise absorbing material that increases acoustic comfort. The panel is available in 22 colors.

STRUCTURAL DETAIL
Added lip reinforces the PET shell for extra durability

ELEGANT LIGHT
Rounded diffuser creates a charming illumination

13.39in
340mm

Ø20.45in
Ø520mm

— 4274DI
DIRECT INDIRECT

TRUE UPLIGHT
4274DI uses a second COB to offer great uplight performance

PRODUCT SPECIFICATION	4274D-20-REG	4274D-20-HO	4274DI-20-LED.C1	4274DI-20-LED.C2	4274DI-20-LED.C3	4274DI-20-LED.C4
PERFORMANCE						
SYSTEM WATTAGE	30.5W	46.7W	45.1W	50.6W	61.3W	66.8W
DELIVERED LUMENS DIRECT (4000K)*	2228 LM	3414 LM	2228 LM	2228 LM	3414 LM	3464 LM
DELIVERED LUMENS INDIRECT(4000K)			1261 LM	1885 LM	1261 LM	1885 LM
OTHER INFORMATION						
WEIGHT	7.4 LBS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG	8.5 LBS / 3.9 KG	9.0 LBS / 4.2 KG	9.0 LBS / 4.2 KG
ACOUSTIC PERFORMANCE	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION

4274-D-20

4274-DI-20

5 years warranty

Visit our website for warranty terms and conditions.

— 4274D
DIRECT

This diagram illustrates the exploded view of the 4274D DIRECT lamp assembly. The components are shown in their relative positions for assembly. The main body is a large, dome-shaped housing. The internal components include a central reflector, a series of vertical fins, and a base plate. The diagram shows the housing, the internal components, and the base plate. The text "— 4274D DIRECT" is located to the left of the main body.

