

KNIT 4274XX-20

PROJECT PROJÉT
SPEC TYPE
NOTES



FINISH FINI




CHF

SGF

OVERALL HEIGHT HAUTEUR HORS TOUT

LED	1.35" CANOPY
MOUNTING	2473F
CABLE	71.60"

MOUNTING OPTIONS OPTIONS DE MONTAGE

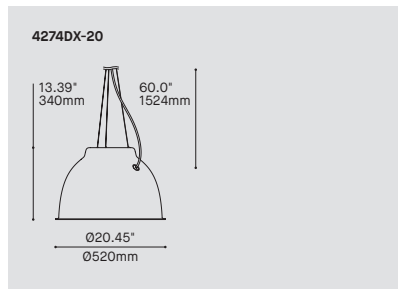


ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE
MODEL MODÈLE		
4274D-20	KNIT 20" - DIRECT	
4274DI-20	KNIT 20" - DIRECT INDIRECT	
LIGHT SOURCE SOURCE LUMINEUSE		
4274D-20		
LED	REGULAR OUTPUT	
LED.HO	HIGH OUTPUT	
4274DI-20		
LED.C1	REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT	
LED.C2	REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT	
LED.C3	HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT	
LED.C4	HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT	
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR		
27*	2700K	
30	3000K	
35	3500K	
40	4000K	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		
80	80+ CRI	
90*	90+ CRI	
	* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
VOLTAGE VOLTAGE		
120V	120 VOLT	
277V	277 VOLT	
CONTROL OPTION OPTION DE CONTRÔLE		
DV	0-10V DIMMING (120V-277V)	
DP	PHASE DIMMING (120V ONLY)	
NLTAIR2*	NLIGHT AIR CONTROL GEN 2	
NLIGHT*	NLIGHT WIRED CONTROL	
	LED DIMMING DRIVER IS STANDARD IN THIS PRODUCT, PLEASE SPECIFY YOUR DIMMING TYPE	
	* REQUIRES RC2 CANOPY	
EMERGENCY BATTERY BATTERIE D'URGENCE		
	EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.	
EMB*	EMERGENCY BATTERY FOR REMOTE BOX	
	* 3981EA ACCESSORY IS REQUIRED	
CABLE CÂBLE		AC
AC	AIRCRAFT MOUNTING & BLACK OR WHITE CABLE, FIELD ADJUSTABLE	
CABLE LENGTH LONGUEUR DE CÂBLE		
60	60" AIRCRAFT CABLE (STD LENGTH)	
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)	
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE	
MOUNTING MONTAGE		
	ROUND CANOPY / PAVILLON ROND	
RC1	SCREWLESS 1.35" CANOPY (2473F)	
RC2	NLIGHT SCREWLESS 1.75" CANOPY (2474H)	
CANOPY FINISH FINI PAVILLON		
BLKE	BLACK FINE TEXTURE	
WHE	WHITE FINE TEXTURE	
SHADE FINISH FINI ABAT-JOUR		
CHF	CHARCOAL FELT	
SGF	SILVER GRAY FELT	
DIFFUSER FINISH FINI DIFFUSEUR		WH
WH	WHITE	
ACCESSORY ACCESSOIRE		
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



KNIT 4274D-20 / 4274DI-20

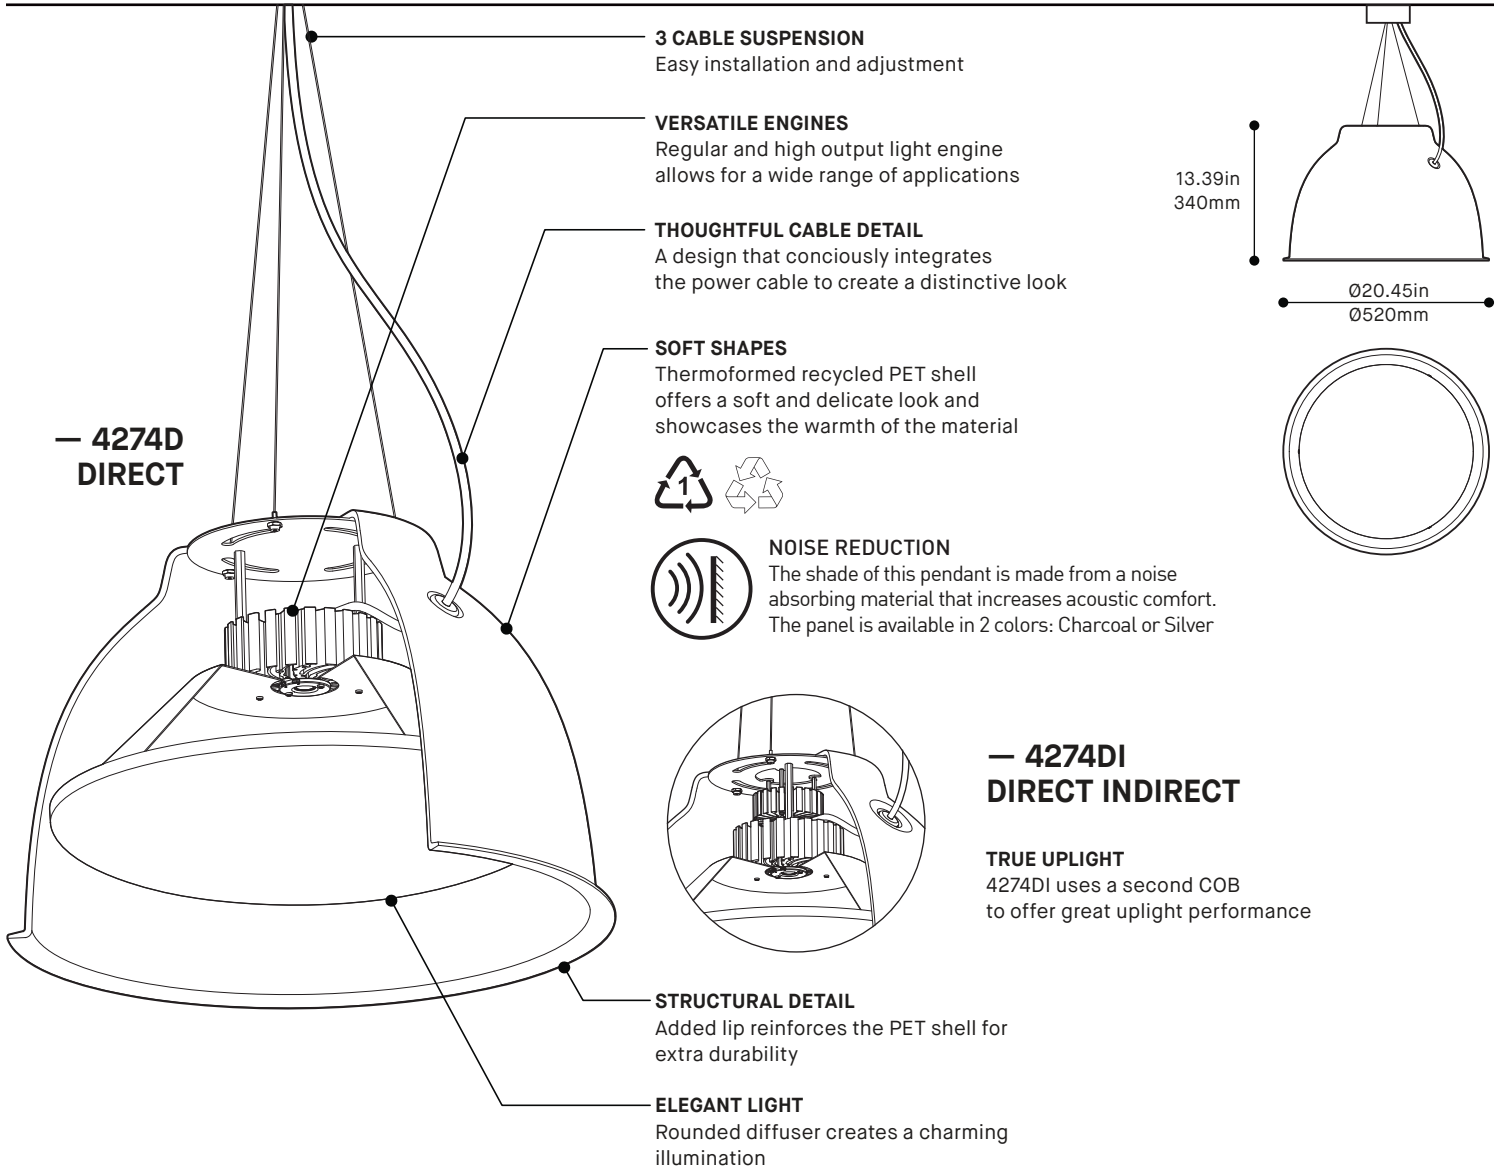

3 CABLE SUSPENSION
Easy installation and adjustment


VERSATILE ENGINES
Regular and high output light engine allows for a wide range of applications

THOUGHTFUL CABLE DETAIL
A design that consciously integrates the power cable to create a distinctive look

SOFT SHAPES
Thermoformed recycled PET shell offers a soft and delicate look and showcases the warmth of the material




NOISE REDUCTION
The shade of this pendant is made from a noise absorbing material that increases acoustic comfort. The panel is available in 2 colors: Charcoal or Silver



13.39in
340mm

Ø20.45in
Ø520mm



— 4274D
DIRECT

— 4274DI
DIRECT INDIRECT

TRUE UPLIGHT
4274DI uses a second COB to offer great uplight performance

STRUCTURAL DETAIL
Added lip reinforces the PET shell for extra durability

ELEGANT LIGHT
Rounded diffuser creates a charming illumination


PRODUCT SPECIFICATION 4274D-20-REG 4274D-20-HO 4274DI-20-LED.C1 4274DI-20-LED.C2 4274DI-20-LED.C3 4274DI-20-LED.C4

PERFORMANCE	4274D-20-REG	4274D-20-HO	4274DI-20-LED.C1	4274DI-20-LED.C2	4274DI-20-LED.C3	4274DI-20-LED.C4
SYSTEM WATTAGE	30.5W	46.7W	45.1W	50.6W	61.3W	66.8W
DELIVERED LUMENS DIRECT (4000K)*	2228 LM	3414 LM	2228 LM	2228 LM	3414 LM	3464 LM
DELIVERED LUMENS INDIRECT(4000K) <small>*EXPECT A 15% DECREASE IN PERFORMANCE FOR CHARCOAL GRAY VERSION.</small>			1261 LM	1885 LM	1261 LM	1885 LM
OTHER INFORMATION						
WEIGHT	7.4 LBS / 3.4 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG	8.5 LBS / 3.9 KG	9.0 LBS / 4.2 KG	9.0 LBS / 4.2 KG
ACOUSTIC PERFORMANCE	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING	*ACOUSTIC TESTS PENDING

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

LIGHT DISTRIBUTION

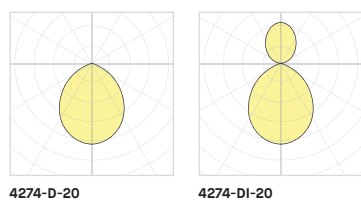

Visit our website for warranty terms and conditions.



TECHNICAL DATA

KNIT 4274D-20 / 4274DI-20

— 4274D DIRECT

- SUSPENSION 3 CABLES**
Installation et ajustement facile
- SOURCES POLYVALENTES**
Source HO et REG permettant une grande variété d'application
- CABLE D'ALIMENTATION INTÉGRÉ**
Design intégrant le câble d'alimentation de manière assumée
- FORMES ARRONDIES**
Coquille de PET recyclée thermoformée donnant un look délicat au luminaire et met en valeur l'aspect chaleureux du matériau
- RÉDUCTION DE BRUIT**
L'abat-jour de ce luminaire est créé à partir d'un matériau acoustique qui améliore le confort sonore. Le panneau est disponibles en 2 couleurs: Gris ou Argent
- DÉTAIL STRUCTUREL**
Une bordure structurale ajoute de la rigidité à l'abat-jour
- LUMIÈRE ÉLÉGANTE**
Diffuseur arrondi permettant une diffusion unie sans quincaillerie visible

— 4274DI DIRECT INDIRECT


- SOURCE INDIRECTE PUISSANTE**
4274DI utilise un second COB pour offrir un éclairage indirect performant

SPÉCIFICATION PRODUIT	4274D-20-REG	4274D-20-HO	4274DI-20-LED.C1	4274DI-20-LED.C2	4274DI-20-LED.C3	4274DI-20-LED.C4
PERFORMANCE						
PUISSANCE TOTALE	30.5W	46.7W	45.1W	50.6W	61.3W	66.8W
LUMENS RÉELS DIRECT (4000K)*	2228 LM	3414 LM	2228 LM	2228 LM	3464 LM	3464 LM
LUMENS RÉELS INDIRECT (4000K)			1261 LM	1885 LM	1261 LM	1885 LM
<small>*PRÉVOYEZ UNE BAISSSE DE PERFORMANCE DE 15% POUR LA VERSION GRIS CHARCOAL.</small>						
AUTRES INFORMATION						
POIDS	8.0 LBS / 3.7 KG	8.0 LBS / 3.7 KG	8.5 LBS / 3.9 KG	8.5 LBS / 3.9 KG	9.0 LBS / 4.2 KG	9.0 LBS / 4.2 KG
PERFORMANCE ACCOUSTIQUE	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS	*TESTS EN COURS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
80+	4000K	1.00
80+	3500K	0.98
80+	3000K	0.94
80+	2700K	0.91
90+	4000K	0.88
90+	3500K	0.85
90+	3000K	0.81
90+	2700K	0.77

DISTRIBUTION LUMINEUSE

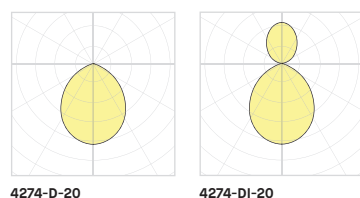

Visitez notre site Web pour les termes et conditions.



DONNÉES TECHNIQUES