

MILL Ø14" SUSPENDED

PROJECT PROJCT
SPEC TYPE
NOTES



POWER CORD FINISH FINI CABLE D'ALIMENTATION





SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONS OPTIONS DE MONTAGE

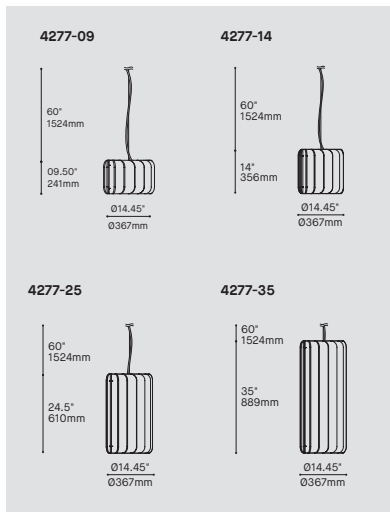

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
MODEL MODÈLE					
4277D-09	MILL 9.5" (DIRECT)				
4277D-14	MILL 14" (DIRECT)				
4277D-25	MILL 25" (DIRECT)				
4277D-35	MILL 35" (DIRECT)				
4277DI-14	MILL 14" (DIRECT + INDIRECT)				
4277DI-25	MILL 25" (DIRECT + INDIRECT)				
4277DI-35	MILL 35" (DIRECT + INDIRECT)				
	*DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY				
LIGHT SOURCE SOURCE LUMINEUSE					
4277D					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4277DI					
LED.LO.REG	LOW OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
	*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)					
80	80+ CRI				
90*	90+ CRI				
	*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
	*DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
	*REQUIRES RC2 CANOPY				
EMERGENCY BATTERY BATTERIE D'URGENCE					
	APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.				
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
	*3981EA ACCESSORY IS REQUIRED				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY) FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE					
RC1	ROUND CANOPY / PAVILLON ROND				
RC2	SCREWLESS CANOPY Ø5.50" X 1.35" (2473F) NLIGHT SCREWLESS CANOPY Ø7.75" X 1.30" (2474H)				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CABLE D'ALIMENTATION					
BLK	BLACK VINYL	BOC*	BLOOD ORANGE	NBC*	NAVY BLUE
WH	WHITE VINYL	BTC*	BATTLESHIP GRAY	REC*	RED
ABC*	AZURE BLUE	BYC*	BANANA YELLOW	SGC*	SILVER GRAY
AWC*	ARCTIC WHITE	CHC*	CHARCOAL	TGC*	TITANIUM GRAY
BBC*	BASIC BLACK	GGC*	GRASS GREEN		
	*TEXTILE BRAIDED CORD. ADDITIONAL COST AND LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	FELT ZINFANDEL
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
	*LONGER LEAD TIME MAY APPLY. PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
DIFFUSER FINISH FINI DIFFUSEUR		WH			
WH	WHITE				
ACCESSORY ACCESSOIRE					
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				



SPECIFICATION

MILL Ø14" SUSPENDED

PROJECT PROJÉT
SPEC TYPE
NOTES





SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

MOUNTING OPTIONS OPTIONS DE MONTAGE

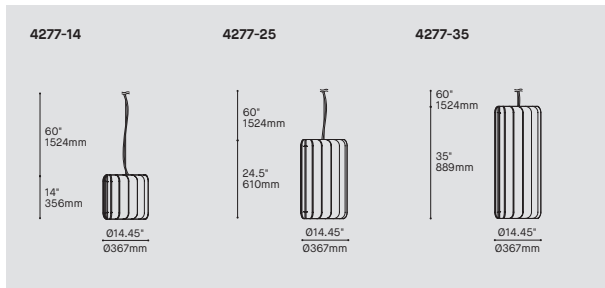

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

MODEL MODÈLE					
4277D-14	MILL 14" (DIRECT)				
4277D-25	MILL 25" (DIRECT)				
4277D-35	MILL 35" (DIRECT)				
4277DI-14	MILL 14" (DIRECT + INDIRECT)				
4277DI-25	MILL 25" (DIRECT + INDIRECT)				
4277DI-35	MILL 35" (DIRECT + INDIRECT)				
	*DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY				
LIGHT SOURCE SOURCE LUMINEUSE					
4277D					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4277DI					
LED.LO.REG	LOW OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)					
80	80+ CRI				
90*	90+ CRI				
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
	*DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS				
	*REQUIRES RC2 CANOPY				
EMERGENCY BATTERY BATTERIE D'URGENCE					
	APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED, INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.				
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
	*3981EA ACCESSORY IS REQUIRED				
CABLE CÂBLE		AC			
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE				
CABLE LENGTH LONGUEUR DE CÂBLE					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
	FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
MOUNTING MONTAGE					
	ROUND CANOPY / PAVILLON ROND				
RC1	SCREWLESS CANOPY Ø5.50" X 1.35" (2473F)				
RC2	NLIGHT SCREWLESS CANOPY Ø7.75" X 1.30" (2474H)				
CANOPY FINISH FINI PAVILLON					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
POWER CORD FINISH FINI CÂBLE D'ALIMENTATION					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
SHADE FINISH FINI ABAT-JOUR					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
	*LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE				
DIFFUSER FINISH FINI DIFFUSEUR		WH			
WH	WHITE				
ACCESSORY ACCESSOIRE					
3981EA	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY				



SPECIFICATION

MILL Ø14" SUSPENDED

QUICKSHIP

PROJECT PROJET

SPEC TYPE


NOTES



SHADE FINISH FINI ABAT-JOUR



MOUNTING OPTIONS OPTIONS DE MONTAGE

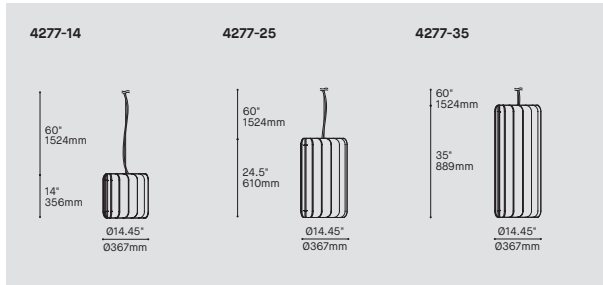

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



ORDERING SPECIFICATION SPÉCIFICATION DE COMMANDE

CODE

QUICKSHIP

QS5 QUICKSHIP 5 DAYS - MAXIMUM 5 UNITS QUICKSHIP 5 JOURS - MAXIMUM 5 UNITÉS
 QS10 QUICKSHIP 10 DAYS - MAXIMUM 20 UNITS QUICKSHIP 10 JOURS - MAXIMUM 20 UNITÉS

MODEL MODÈLE

4277D-14 MILL 14" (DIRECT)
 4277D-25 MILL 25" (DIRECT)
 4277D-35 MILL 35" (DIRECT)
 4277DI-14 MILL 14" (DIRECT + INDIRECT)
 4277DI-25 MILL 25" (DIRECT + INDIRECT)
 4277DI-35 MILL 35" (DIRECT + INDIRECT)
 *DIRECT AND INDIRECT LIGHT SOURCES CAN BE DIMMED INDEPENDENTLY

LIGHT SOURCE SOURCE LUMINEUSE

4277D
 LED.LO LOW OUTPUT
 LED REGULAR OUTPUT
 LED.HO HIGH OUTPUT

4277DI

LED.LO.REG LOW OUTPUT DIRECT + REGULAR OUTPUT INDIRECT
 LED.LO.HO LOW OUTPUT DIRECT + HIGH OUTPUT INDIRECT
 LED.REG.REG REGULAR OUTPUT DIRECT + REGULAR OUTPUT INDIRECT
 LED.REG.HO REGULAR OUTPUT DIRECT + HIGH OUTPUT INDIRECT
 LED.HO.REG HIGH OUTPUT DIRECT + REGULAR OUTPUT INDIRECT
 LED.HO.HO HIGH OUTPUT DIRECT + HIGH OUTPUT INDIRECT

COLOR TEMPERATURE TEMPÉRATURE DE COULEUR

30 3000K
 35 3500K

COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)

80 80+ CRI

VOLTAGE VOLTAGE

120V 120 VOLT
 277V 277 VOLT

CONTROL OPTION OPTION DE CONTRÔLE

DV 0-10V DIMMING (120V-277V)
 DP PHASE DIMMING (120V ONLY)

CABLE CÂBLE

AC AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE

CABLE LENGTH LONGUEUR DE CÂBLE

60 60" AIRCRAFT CABLE (STD LENGTH)
 ** CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)
 FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE

MOUNTING MONTAGE

RC1 ROUND CANOPY / PAVILLON ROND
 SCREWLESS CANOPY Ø5.50" X 1.35" (2473F)

CANOPY FINISH FINI PAVILLON

BLKE BLACK FINE TEXTURE
 WHE WHITE FINE TEXTURE

POWER CORD FINISH FINI CÂBLE D'ALIMENTATION

BLK BLACK POWER CORD
 WH WHITE POWER CORD
 CLR CLEAR POWER CORD

SHADE FINISH FINI ABAT-JOUR

ABF AZURE BLUE FELT BYF BANANA YELLOW FELT REF RED FELT
 AWF ARCTIC WHITE FELT CHF CHARCOAL FELT SGF SILVER GRAY FELT
 BBF BASIC BLACK FELT NBF NAVY BLUE FELT TGF TITANIUM GRAY FELT
 BOF BLOOD ORANGE FELT OBF OCEAN BLUE FELT ZFF ZINFANDEL FELT
 BTF BATTLESHIP GRAY FELT PGF PEAR GREEN FELT

DIFFUSER FINISH FINI DIFFUSEUR

WH WHITE



SPECIFICATION

PROJECT PROJET

SPEC TYPE

NOTES

PROJECT PROJET

SPEC TYPE

NOTES