

# MILL Ø36" SUSPENDED

PROJECT PROJÉT
SPEC TYPE
NOTES





## SHADE FINISH FINI ABAT-JOUR



ADDITIONAL PREMIUM COLORS AVAILABLE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE

## MOUNTING OPTIONS OPTIONS DE MONTAGE

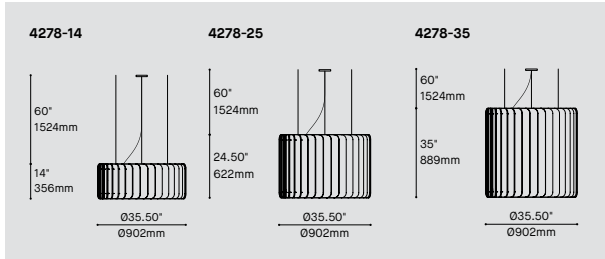

ORDERING SPECIFICATION	SPÉCIFICATION DE COMMANDE	CODE			
<b>MODEL MODÈLE</b>					
4278D-14	MILL 14" (DIRECT)				
4278D-25	MILL 25" (DIRECT)				
4278D-35	MILL 35" (DIRECT)				
4278DI-14	MILL 14" (DIRECT + INDIRECT)				
4278DI-25	MILL 25" (DIRECT + INDIRECT)				
4278DI-35	MILL 35" (DIRECT + INDIRECT)				
<b>LIGHT SOURCE SOURCE LUMINEUSE</b>					
4278D-XX					
LED.LO	LOW OUTPUT				
LED	REGULAR OUTPUT				
LED.HO	HIGH OUTPUT				
4278DI-XX					
LED.LO.REG	LOW OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.LO.HO	LOW OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.REG.REG	REGULAR OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.REG.HO	REGULAR OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
LED.HO.REG	HIGH OUTPUT DIRECT, REGULAR OUTPUT INDIRECT				
LED.HO.HO	HIGH OUTPUT DIRECT, HIGH OUTPUT INDIRECT				
<b>COLOR TEMPERATURE TEMPÉRATURE DE COULEUR</b>					
27*	2700K				
30	3000K				
35	3500K				
40	4000K				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
<b>COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)</b>					
90	90+ CRI	90			
LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
<b>VOLTAGE VOLTAGE</b>					
120V	120 VOLT				
277V	277 VOLT				
<b>CONTROL OPTION OPTION DE CONTRÔLE</b>					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
*NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLAB FOR NLTAIR2 OR 39NLWB FOR NLIGHT).					
* DUAL DIMMING NOT AVAILABLE WITH NLIGHT OPTIONS					
* FOR EMERGENCY BATTERY WITH NLIGHT OPTIONS, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
<b>EMERGENCY BATTERY BATTERIE D'URGENCE</b>					
APPLIES TO DOWNLIGHT PORTION ONLY. EM DRIVER BOX INCLUDED. INSTALLED REMOTELY. SEE EM GUIDE FOR DETAILS.					
EMB*	EMERGENCY BATTERY FOR REMOTE BOX				
*3981EA ACCESSORY IS REQUIRED					
<b>CABLE CÂBLE</b>					
AC	AIRCRAFT MOUNTING & POWER CORD, FIELD ADJUSTABLE	AC			
<b>CABLE LENGTH LONGUEUR DE CÂBLE</b>					
60	60" AIRCRAFT CABLE (STD LENGTH)				
**	CUSTOM AIRCRAFT CABLE LENGTH (PLEASE SPECIFY)				
FOR OVERALL LENGTH, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
<b>MOUNTING MONTAGE</b>					
RC1	ROUND CANOPY / PAVILLON ROND	RC1			
SCREWLESS CANOPY Ø4.50" X 0.5" (2471C)					
<b>MOUNTING CABLE OPTION OPTION DE MONTAGE DE CÂBLE</b>					
RCC	CENTERED CANOPY - STRAIGHT AIRCRAFT CABLES				
<b>CANOPY FINISH FINI PAVILLON</b>					
BLKE	BLACK FINE TEXTURE				
WHE	WHITE FINE TEXTURE				
<b>POWER CORD FINISH FINI CÂBLE D'ALIMENTATION</b>					
BLK	BLACK POWER CORD				
WH	WHITE POWER CORD				
CLR	CLEAR POWER CORD				
<b>SHADE FINISH FINI ABAT-JOUR</b>					
ABF	AZURE BLUE FELT	BYF	BANANA YELLOW FELT	REF	RED FELT
AWF	ARCTIC WHITE FELT	CHF	CHARCOAL FELT	SGF	SILVER GRAY FELT
BBF	BASIC BLACK FELT	NBF	NAVY BLUE FELT	TGF	TITANIUM GRAY FELT
BOF	BLOOD ORANGE FELT	OBF	OCEAN BLUE FELT	ZFF	ZINFANDEL FELT
BTF	BATTLESHIP GRAY FELT	PGF	PEAR GREEN FELT		
PREMIUM*	PLEASE SPECIFY PREMIUM COLOR CODE – SEE ACOUSTIC MATERIAL COLOR OPTIONS PAGE				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					

<b>DIFFUSER FINISH FINI DIFFUSEUR</b>		<b>WH</b>
<b>WH</b>	WHITE	
<b>ACCESSORY ACCESSOIRE</b>		
ALL ACCESSORIES ARE AVAILABLE FOR ADVANCE SHIPPING		
<b>39NLAA*</b>	NLIGHT AIR GEN 2 REMOTE POWER PACK	
<b>39NLWA*</b>	NLIGHT WIRED REMOTE POWER PACK	
	* FOR CHICAGO PLENUM INSTALLATION, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE .	
<b>EMERGENCY BATTERY ACCESSORY ACCESSOIRE BATTERIE D'URGENCE</b>		
<b>3981EA</b>	ELECTRICAL BOX FOR EMB EMERGENCY BATTERY	

## PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT



<b>DESIGN:</b>	MILL is a high-performance fixture with a simple shape punctuated by its repeated acoustic felt panels. With its three different diameters, three different lengths and two mounting options, this fixture is versatile to suite various needs and spaces.
<b>INSTALLATION:</b>	Easy to install, adjust and level single aircraft cable mounting, with clip-on acoustic panels. Also available as surface mount.
<b>LIGHT SOURCE:</b>	This pendant offers powerful and evenly diffused lighting with a COB light source. Phase or 0-10V dimming offered. MILL is also offered with an optional indirect light option on a secondary circuit allowing independent control.
<b>SHADE:</b>	The custom CNC-cut rigid felt acoustic panels are available in multiple colors. Composed mainly of recycled polyethylene (PET) bottles which make them recyclable and odorless.